



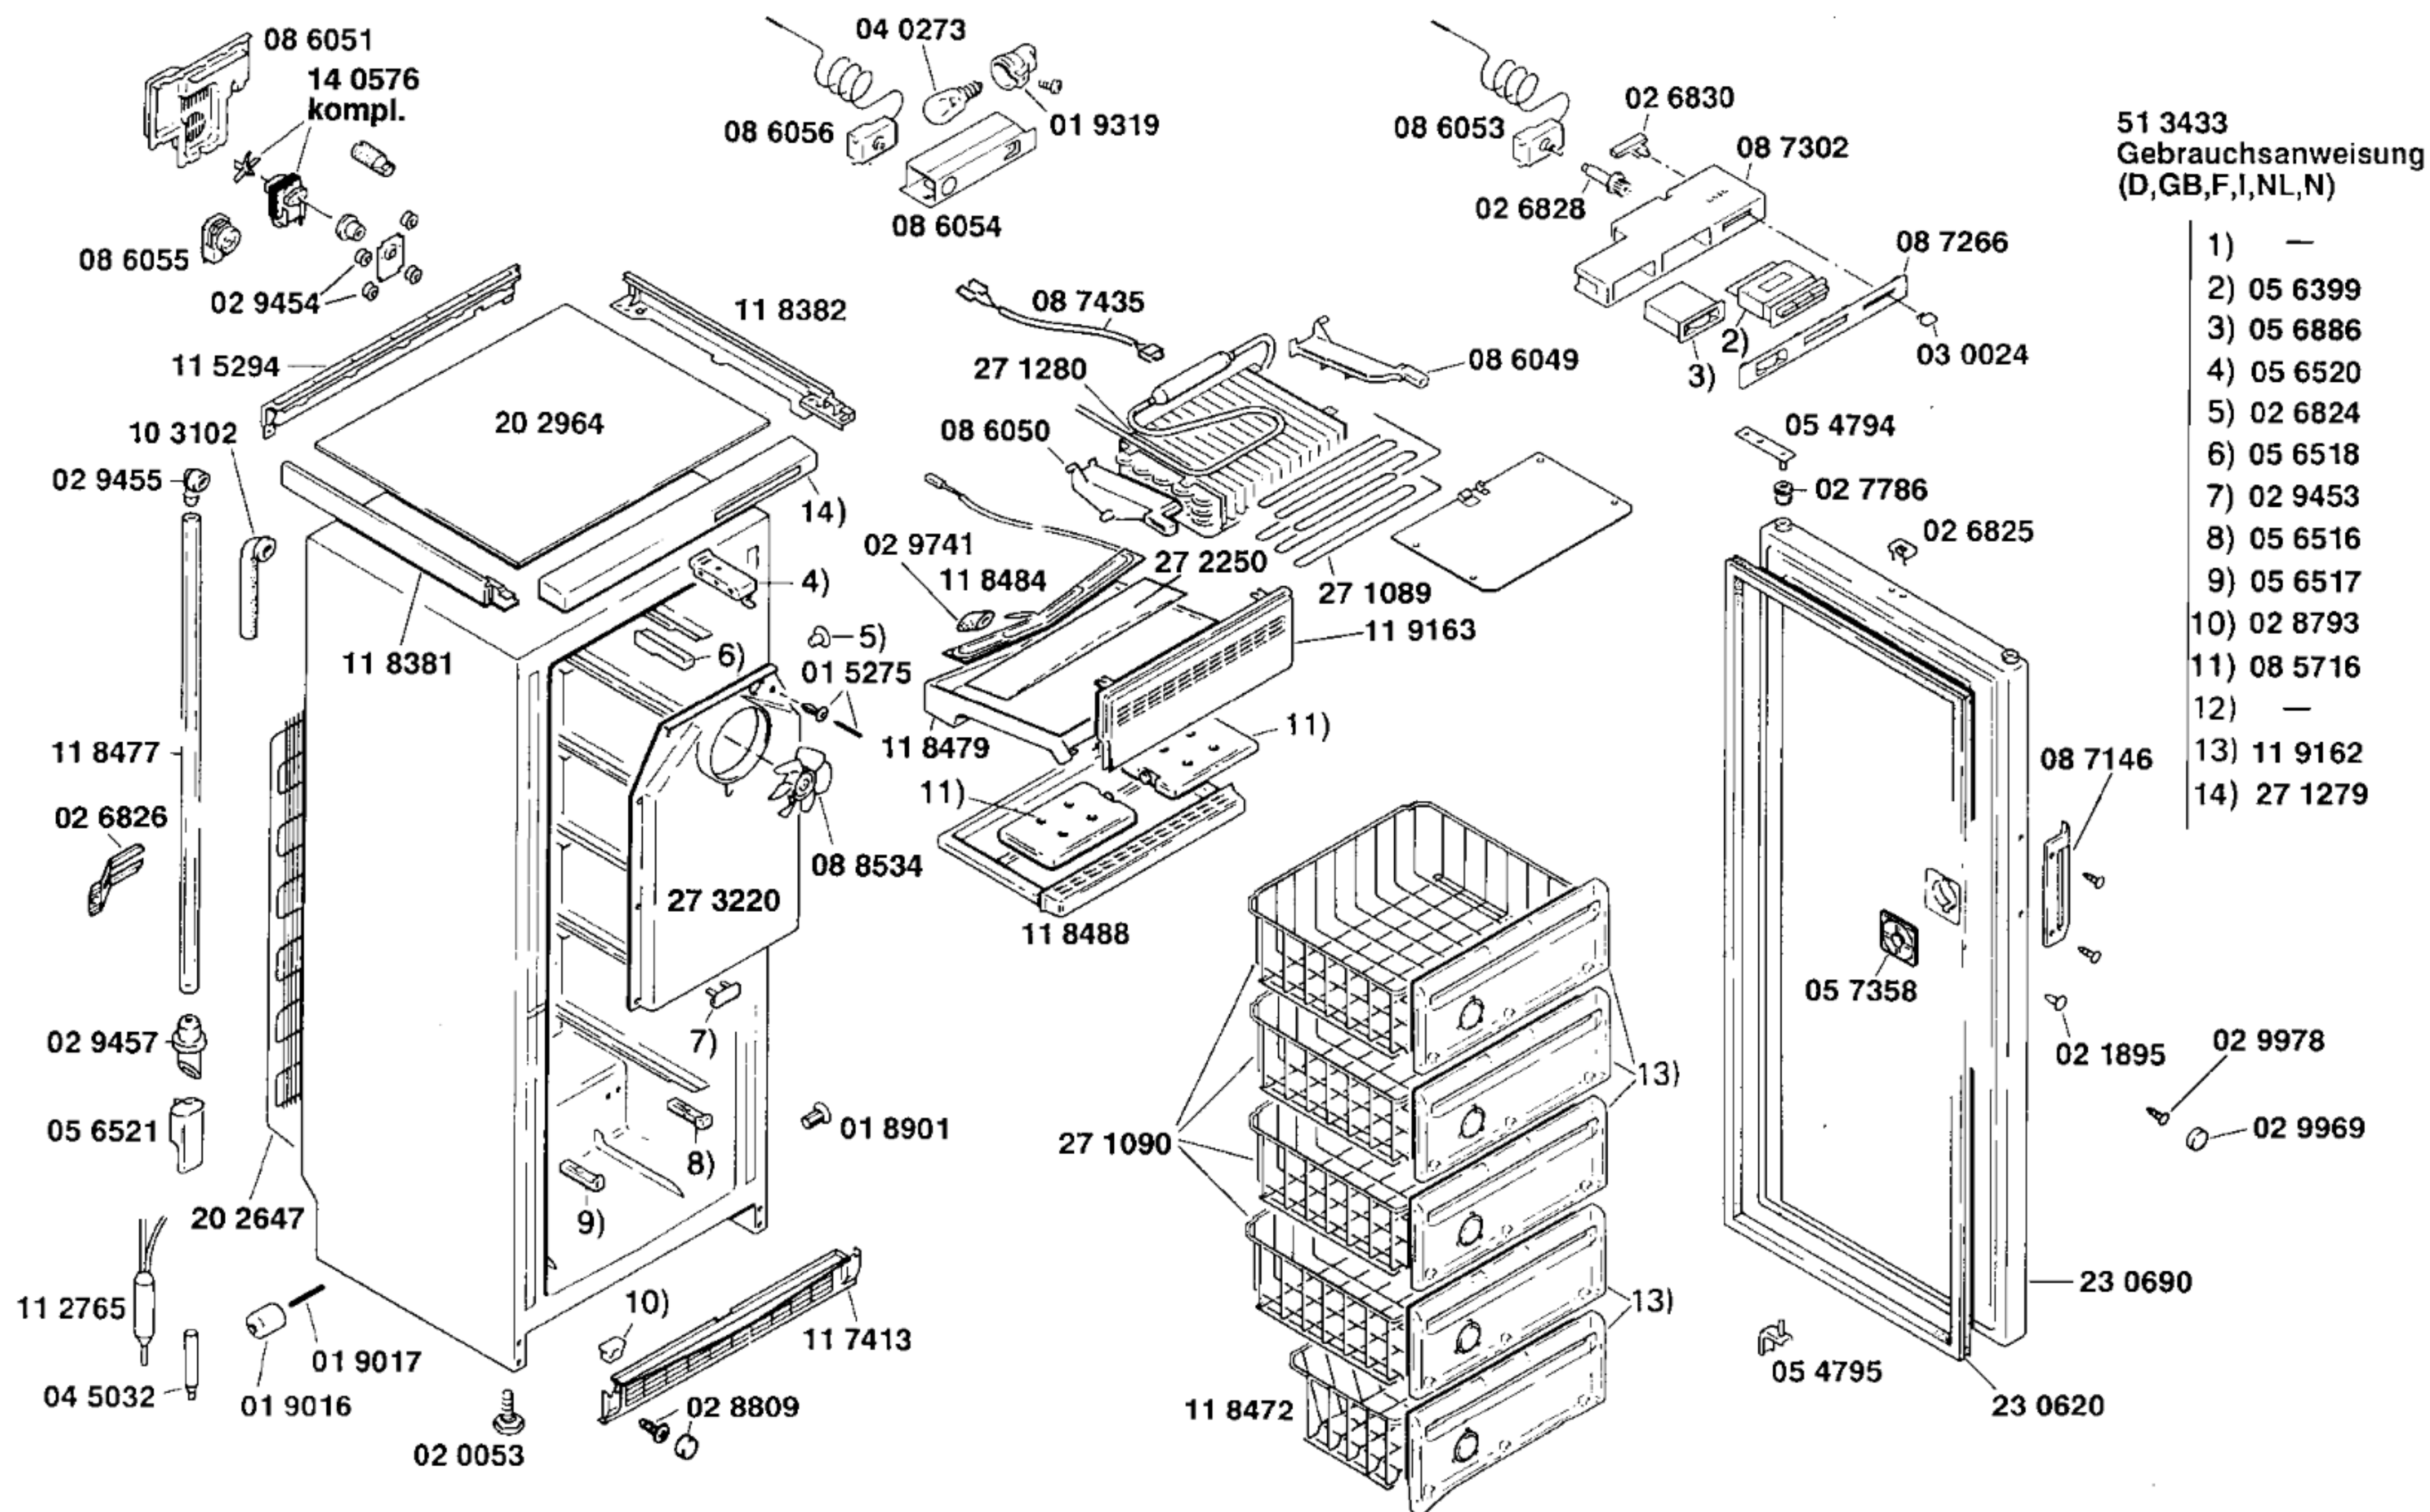

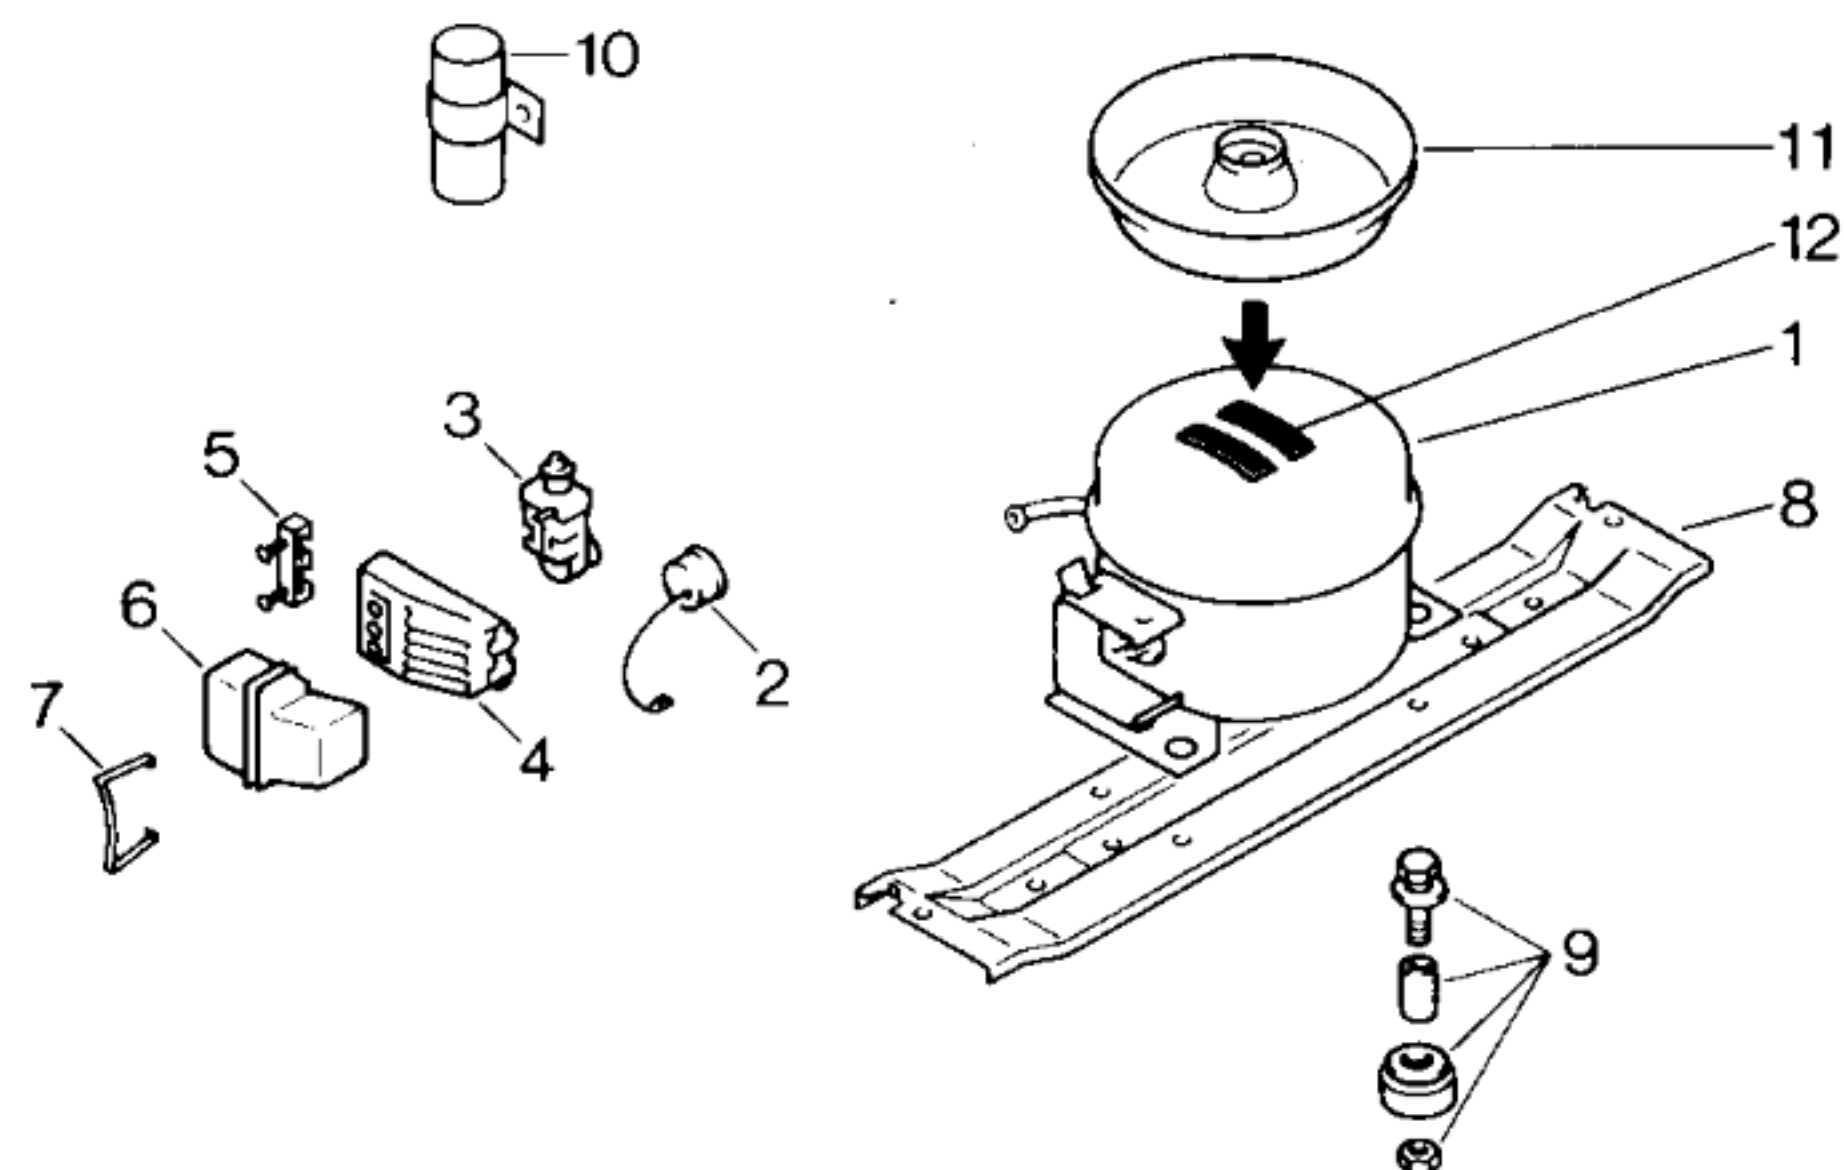

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur			Matsushita		
Typ/Type			D116LRAA		
Förderleistung/Delivery/Débit			l/h	1184	
Anlaufstrom/Starting current/Cour. de démarrage			A	8,75	
Widerstand/Resistance/Résistance			Ha/main/prin.	Ω	12,0
			Hi/aux	Ω	28,7
Temp.-Regler/Thermostat			Danfoss		Ranco
Typ/Type			077B0/091X4742		K 50 H 5658
Reglerstellung/Position			kalt warm		ein aus
Schaltwerte/Switching values/			„ein“	°C	-26,9 -18
Valeurs de commutation			„aus“		-12 -15
(„abtauen“ od.)			„alarm“		
Füllmenge/Fill.quantity/Charge			R12	g	220
Anschlußwert/Conn.load/Puiss. connectée			W	120	
Heizung/Heater/Chauffage			Abtauheizung		Rinnenheizung
Widerstand/Resistance/Résistance			Ω	173	6050
Leistung/Power/Puissance			W	333	9,5
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance			Ω	340	
Schaltuhr/Timer/Minuterie de contact					
Widerstand/Resistance/Résistance			Ω	6500	

Pos.	EU1,CH1	EU2,CH2	
	Matsushita	Matsushita	
	D116LRRA-M20	D116LRRA-M26	
1	14 0563	14 0803	
2	05 8506	03 2748	
3			
4	05 5516	05 5516	
5			
6	05 8458	05 8458	
7	02 6731	02 6731	
8	27 3219	27 3219	
9	05 0166	05 0166	
10	05 8459	05 8459	
11	08 8535	08 8535	
12	05 6008	05 6008	