




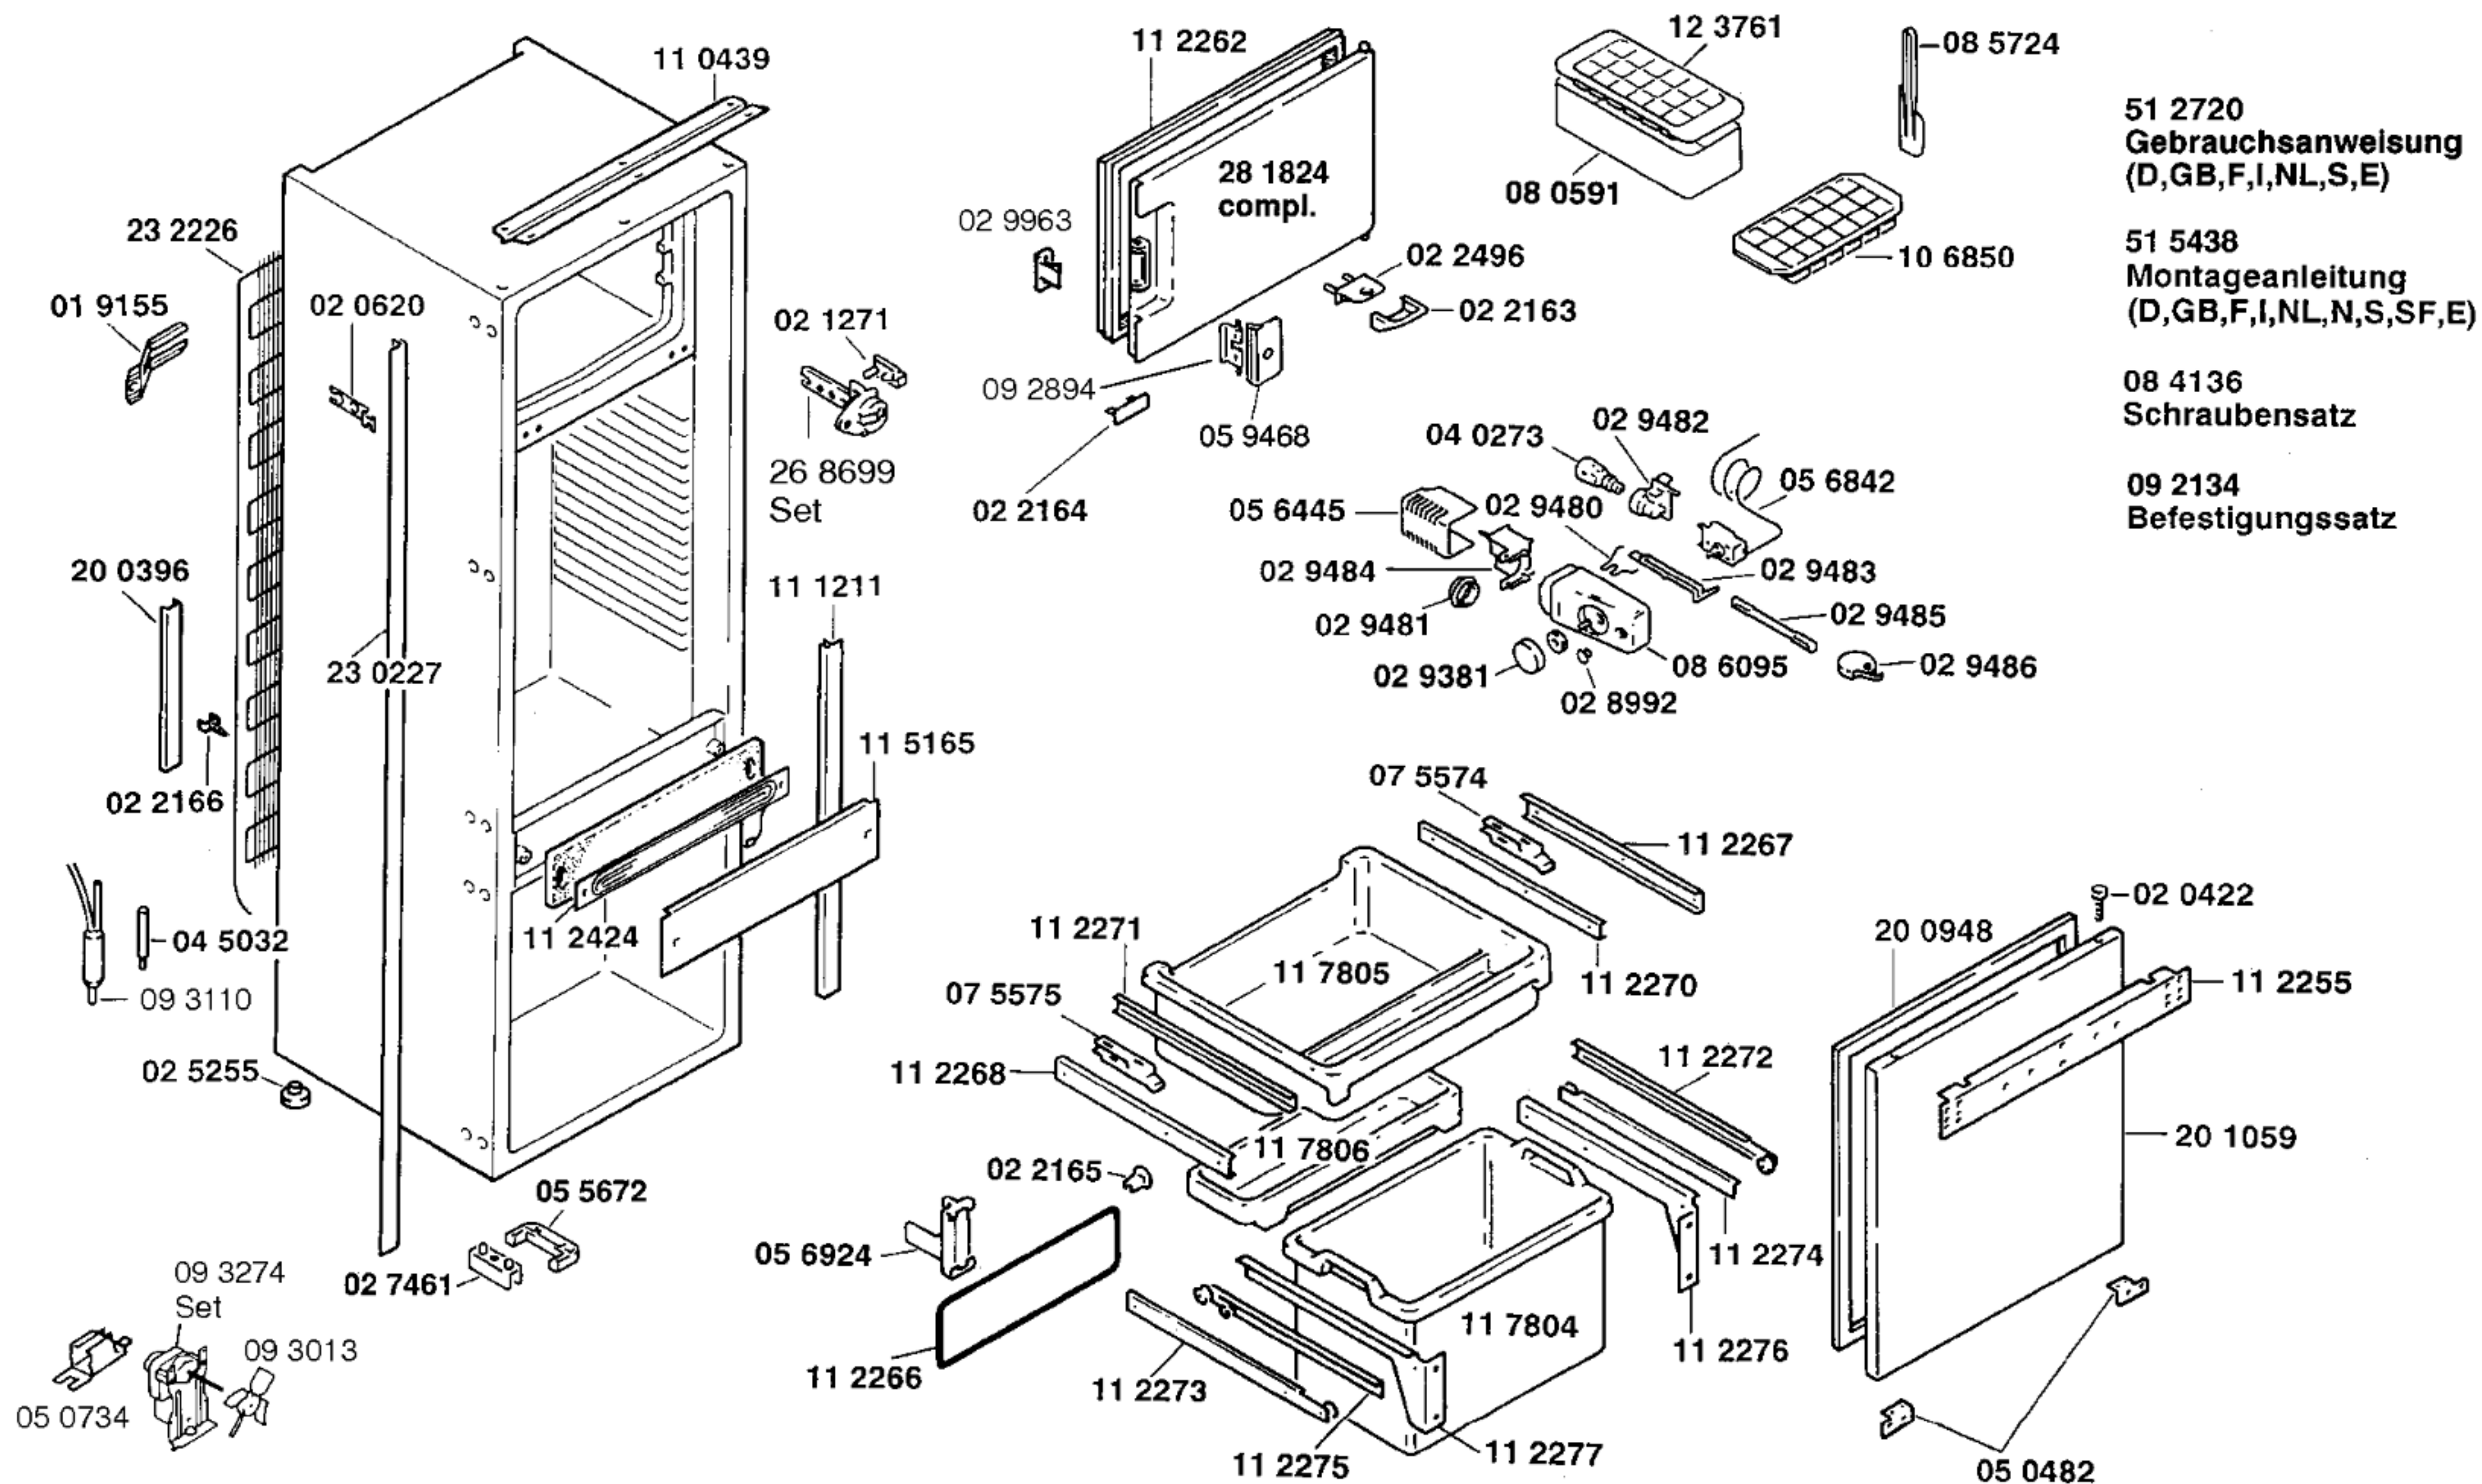

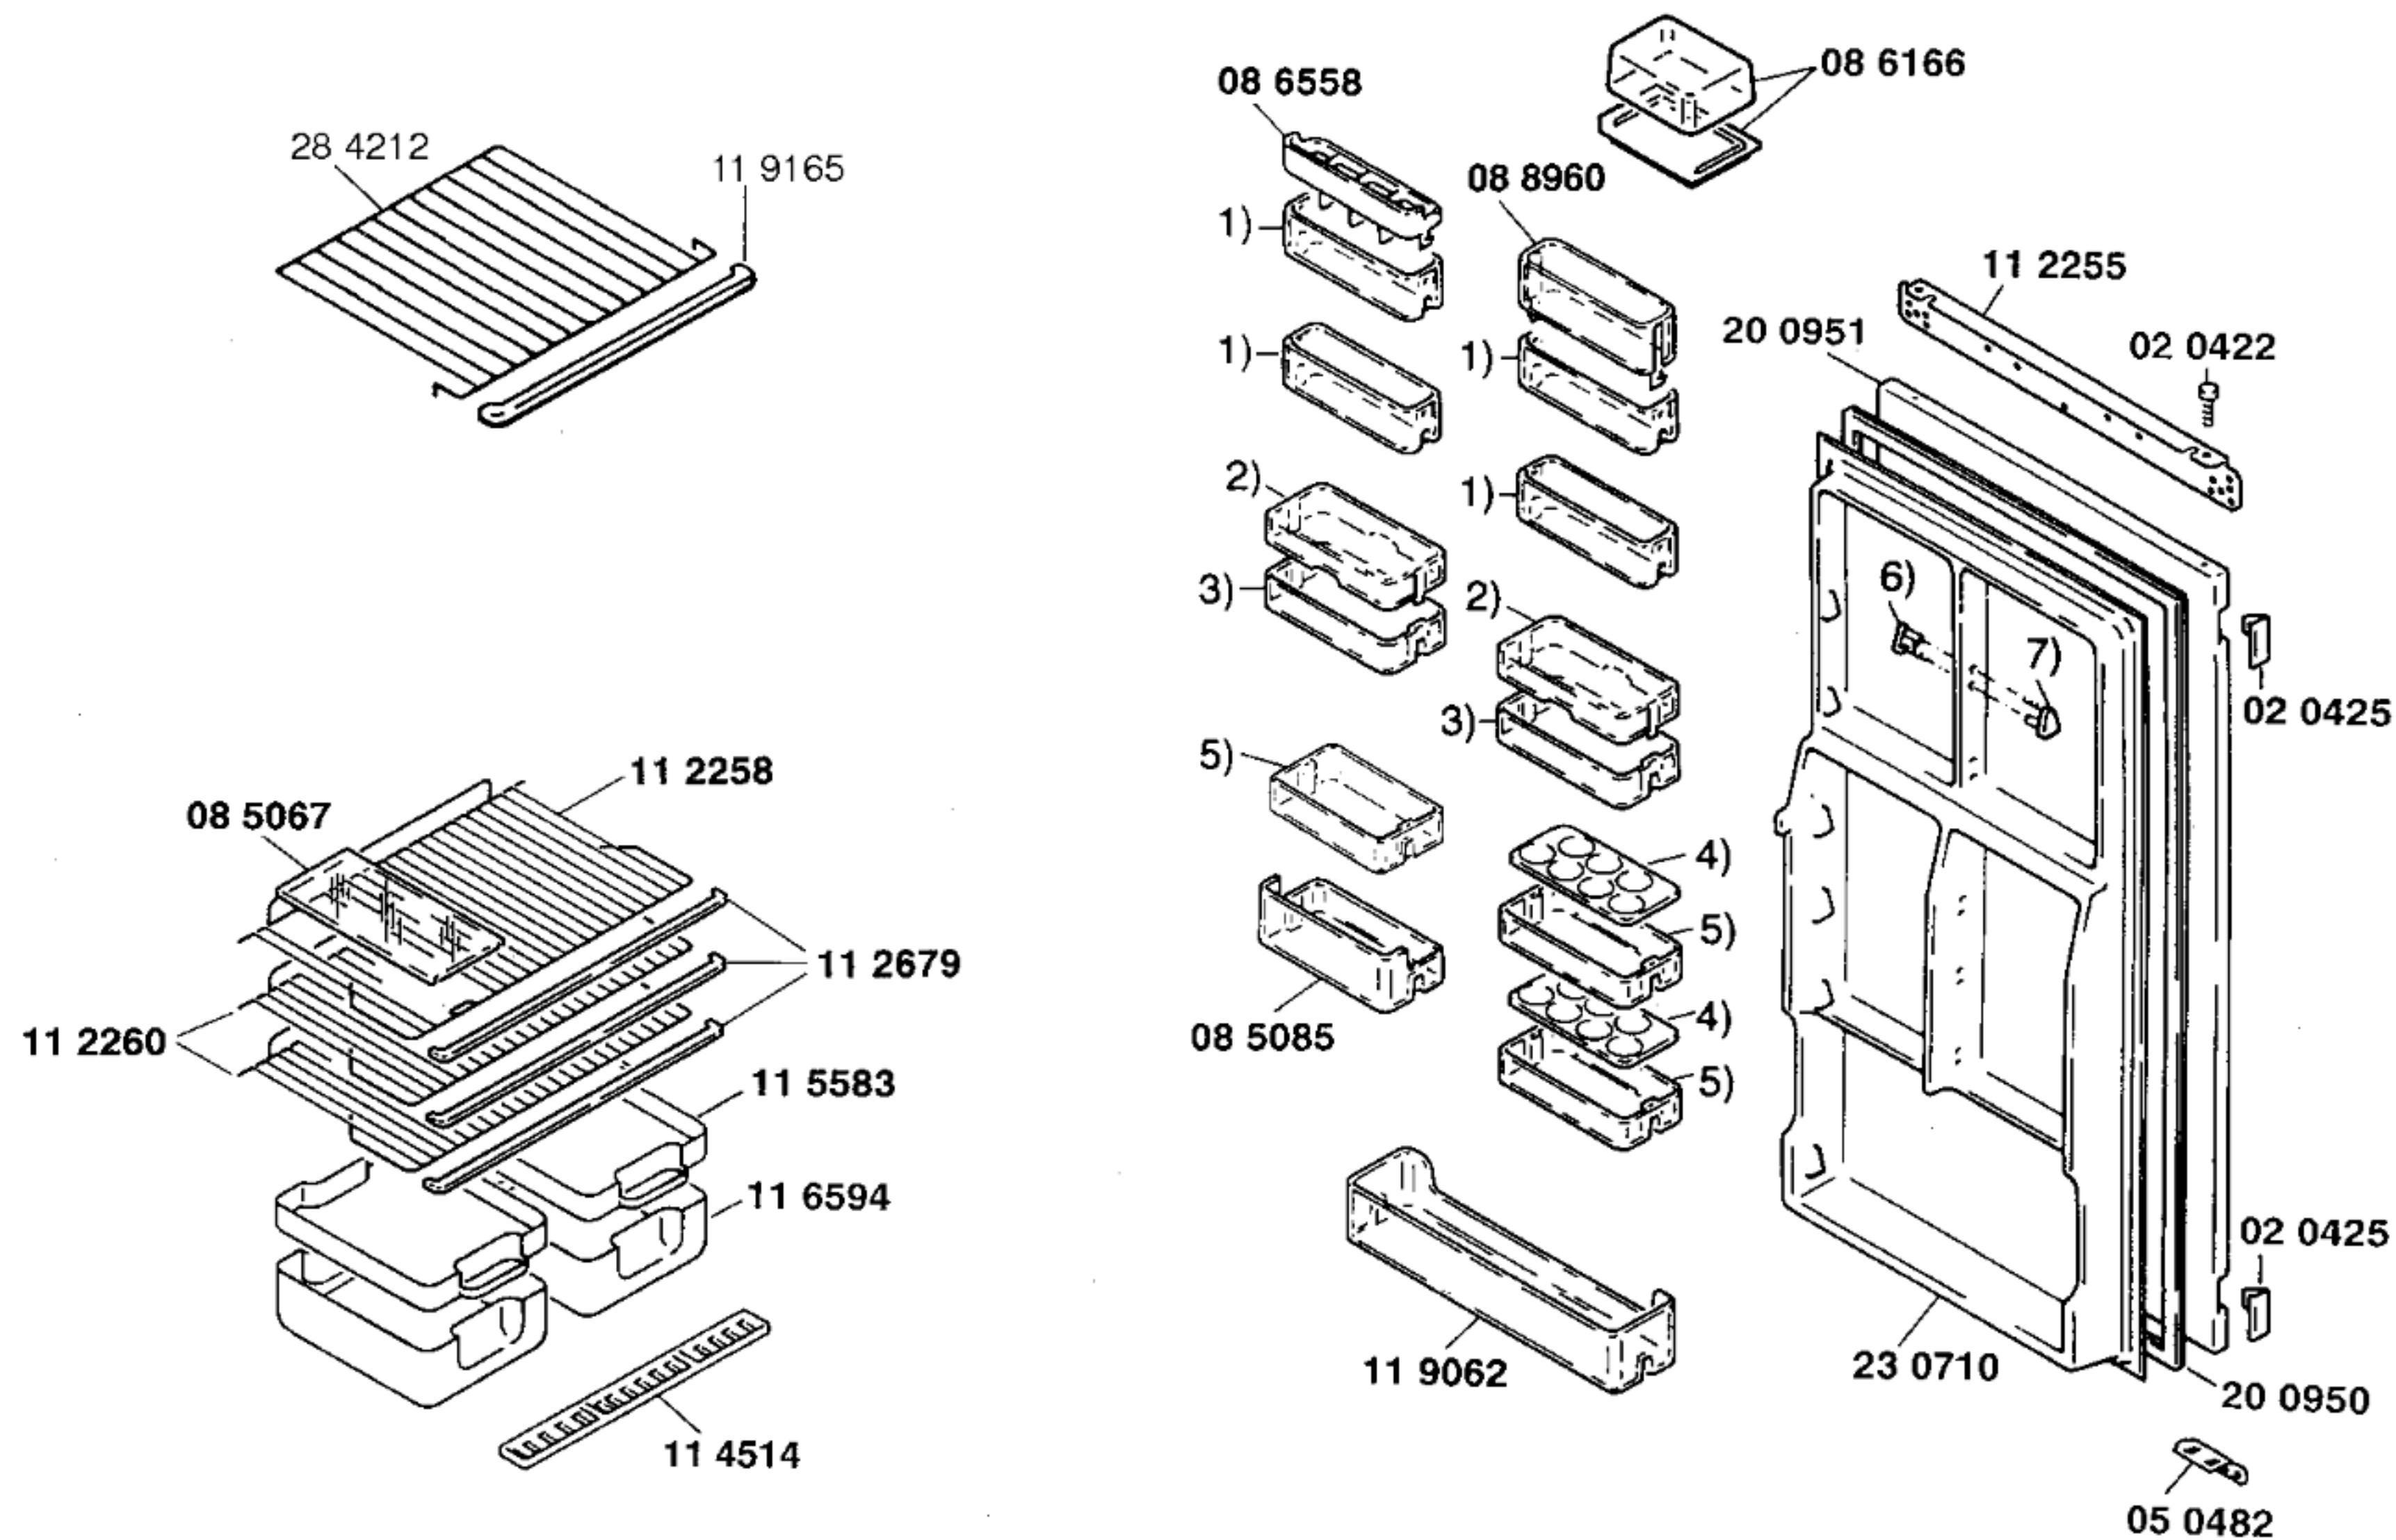

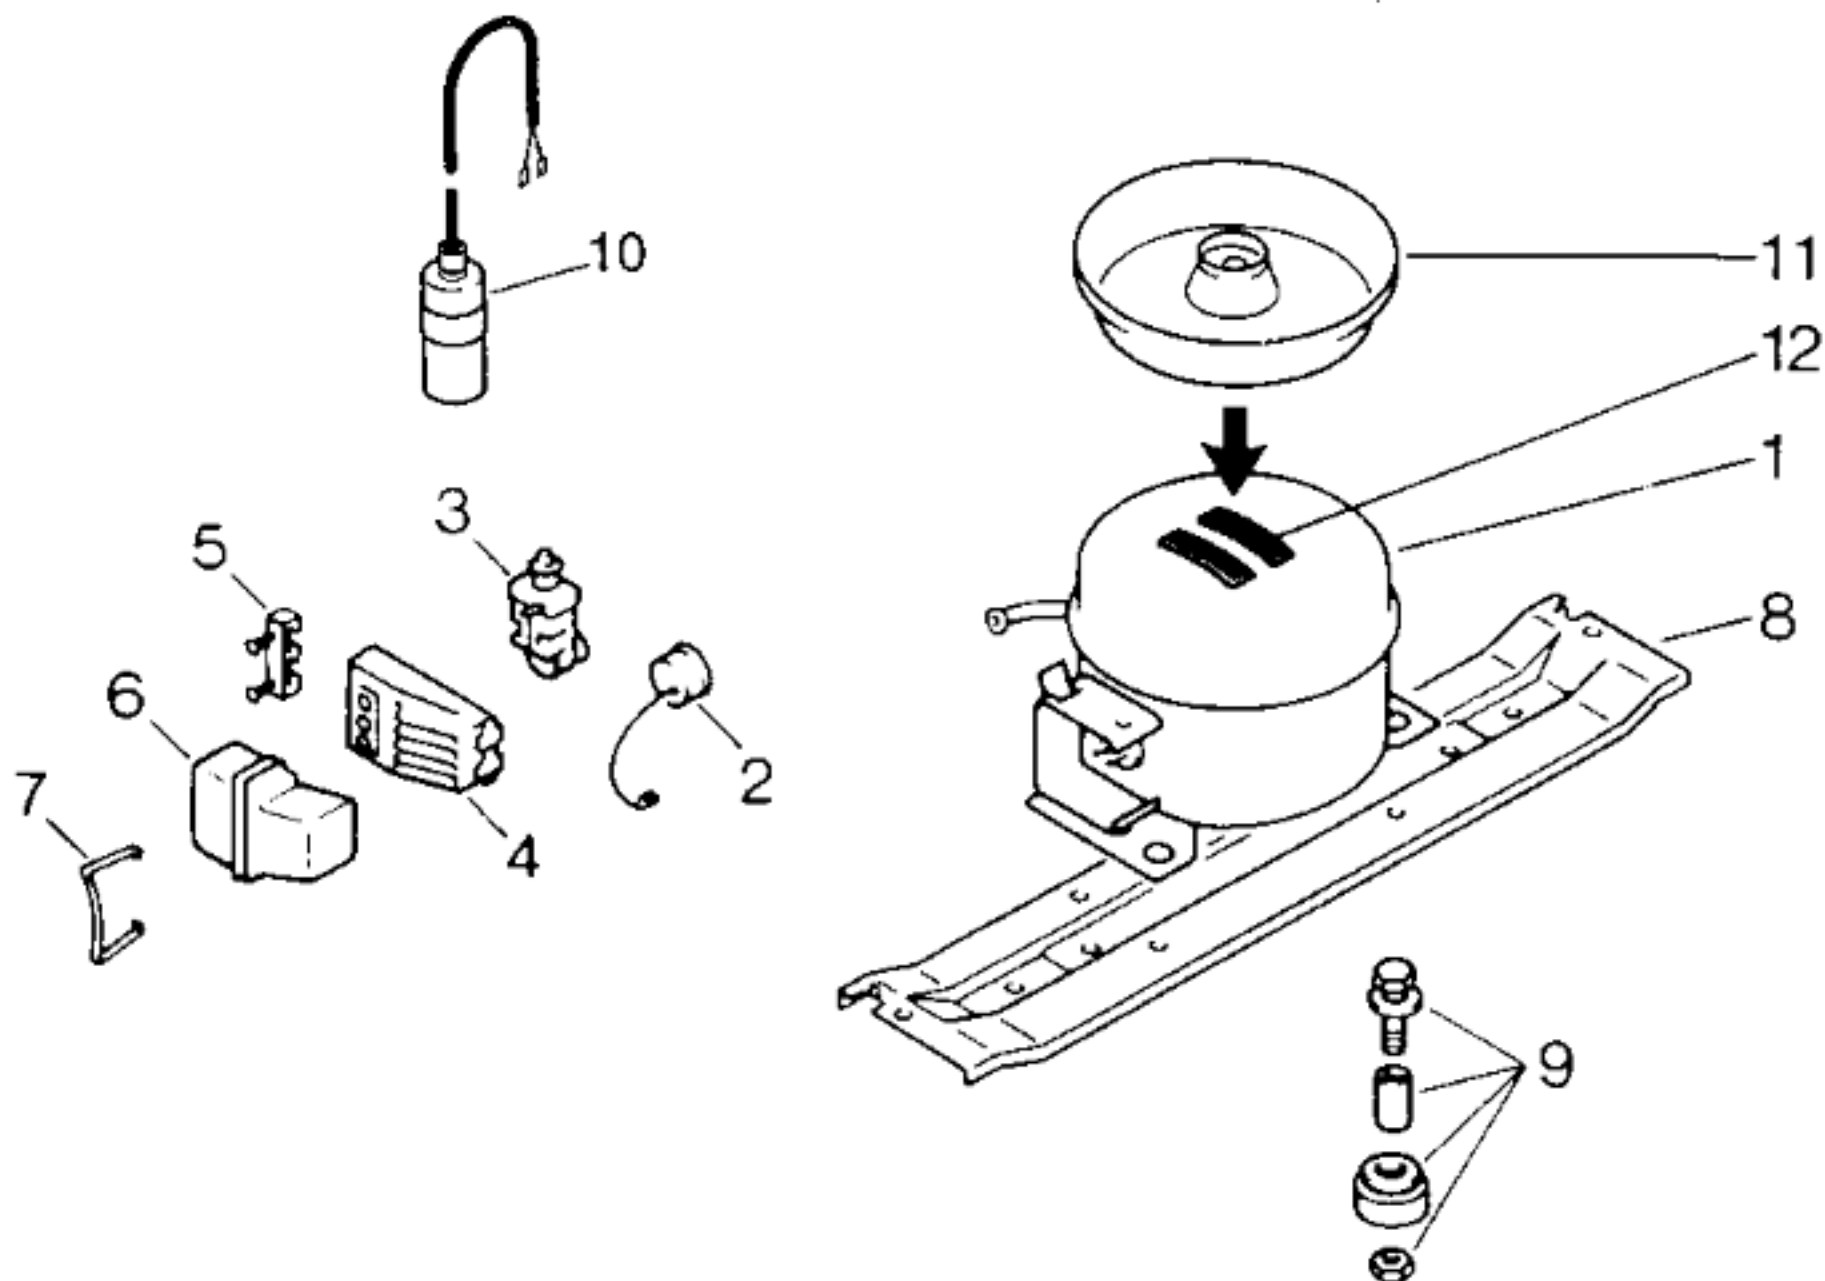

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Matsushita			
Typ/Type		D116LRAA			
Forderleistung/Delivery/Débit		I/h	1184		
Anlaufstrom/Starting current/Cour. de démarrage		A	8,75		
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω 12,0		
		Hi/aux	Ω 28,7		
Temp.-Regler/Thermostat		Ranco			
Typ/Type		K 59			
Reglerstellung/Position			kalt warm		
Schaltwerte/Switching values/ Valeurs de commutation		„ein“	+ 4,5		
		„aus“	- 31,0		
		(„abtauen“ od.) „alarm“	+ 4,5 - 13,5		
Fullmenge/Fill.quantity/Charge		R12	g 180		
Anschlußwert/Conn.load/Puiss. connectée		W	150		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω	430±10%		
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			

Pos.	Matsushita		
	D116LRAA		
1	14 0563		
2	05 8506		
3			
4			
5			
6	05 8458		
7	02 6731		
8	28 1825		
9	05 0166		
10	05 9467		
11	08 5182		
12	05 6008		