




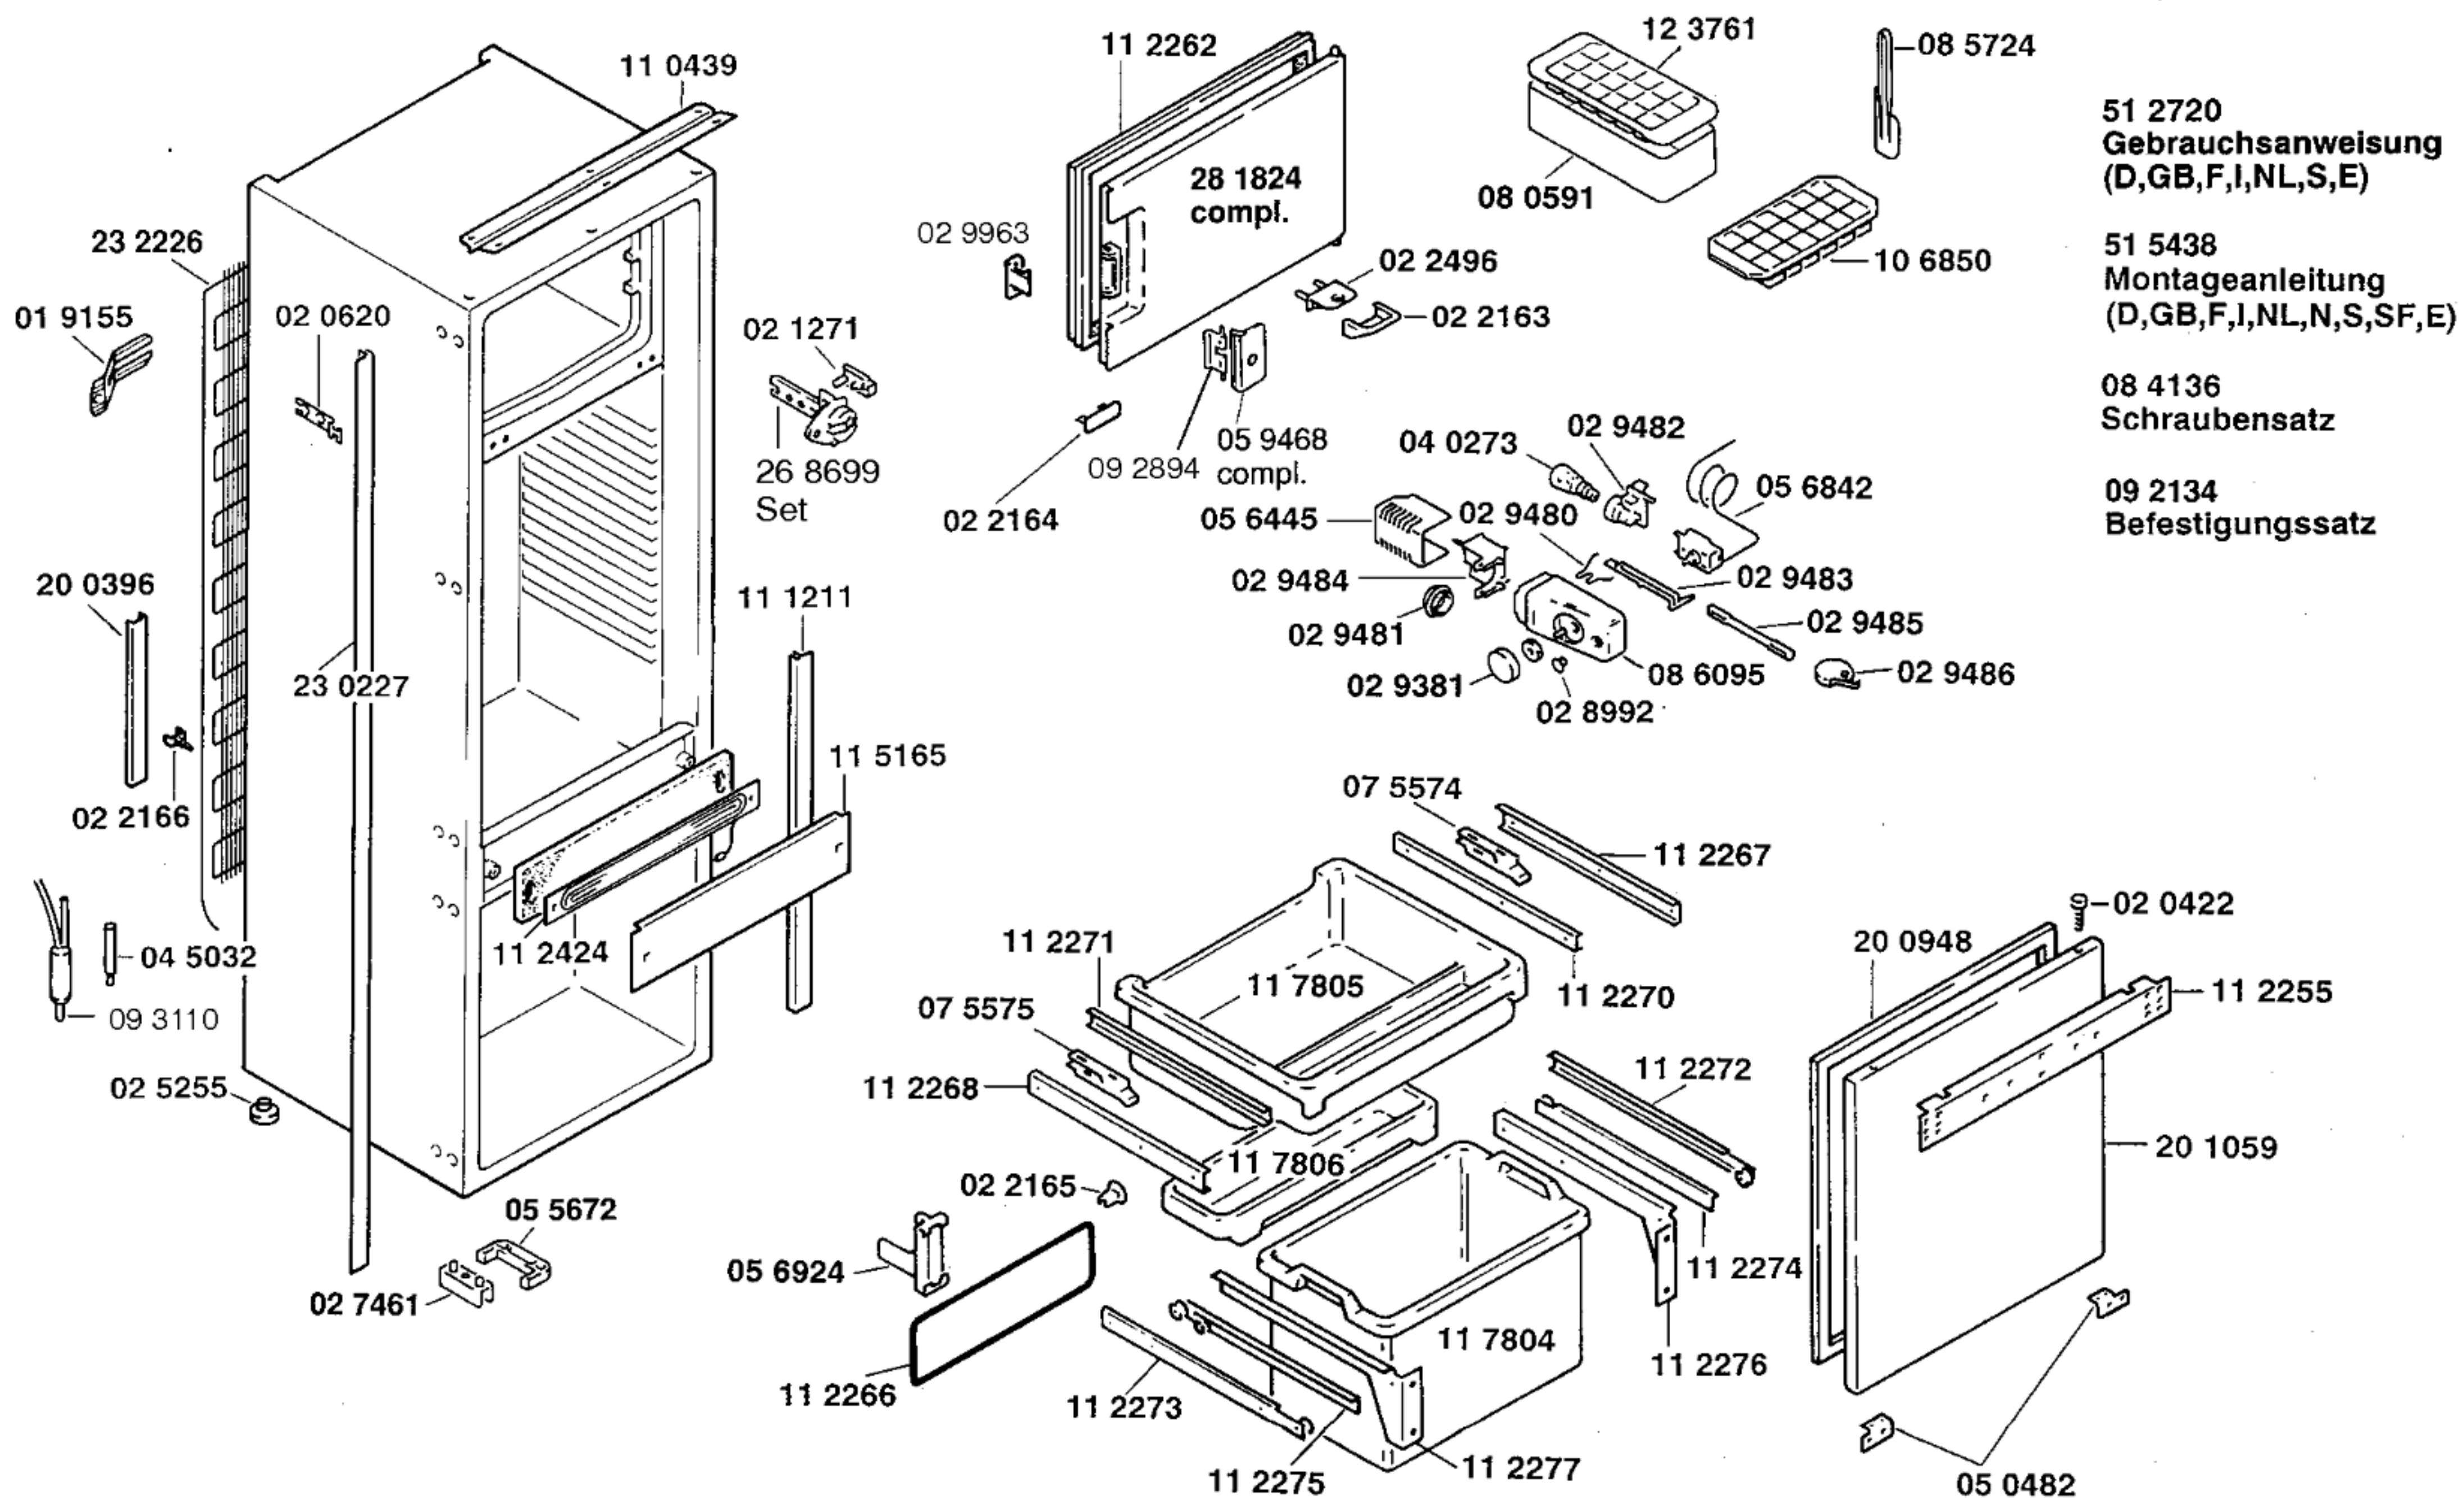

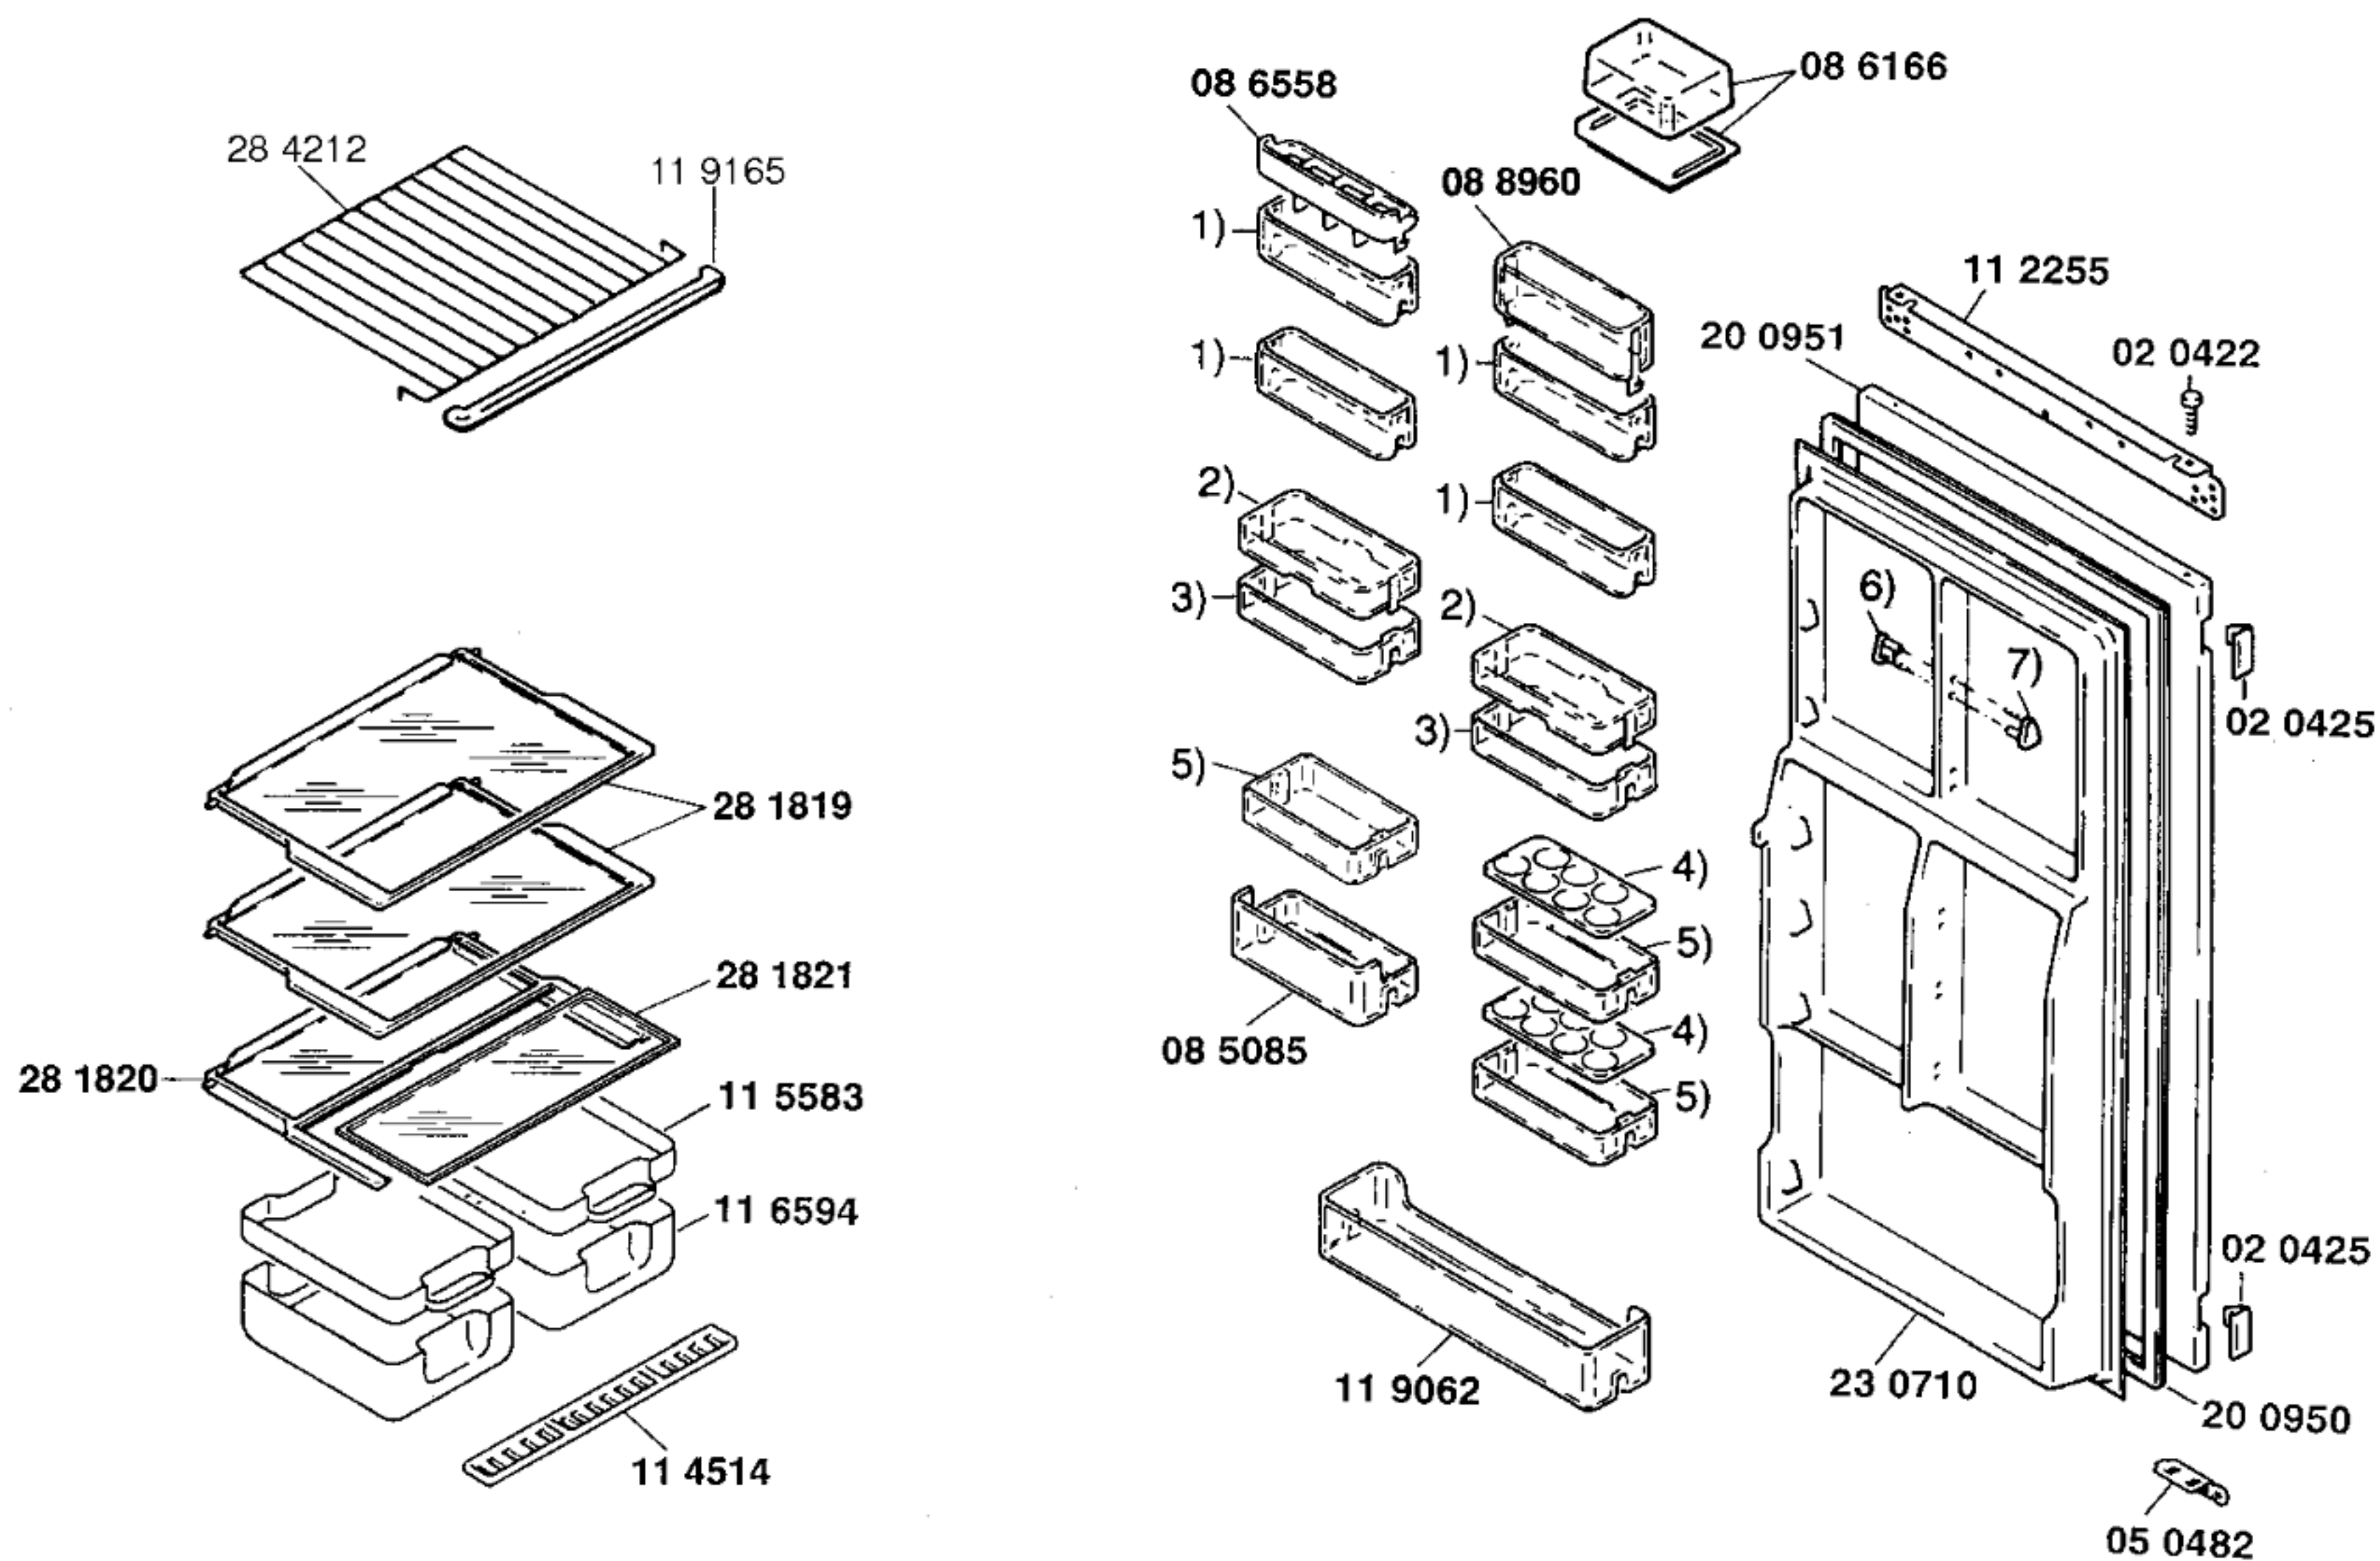

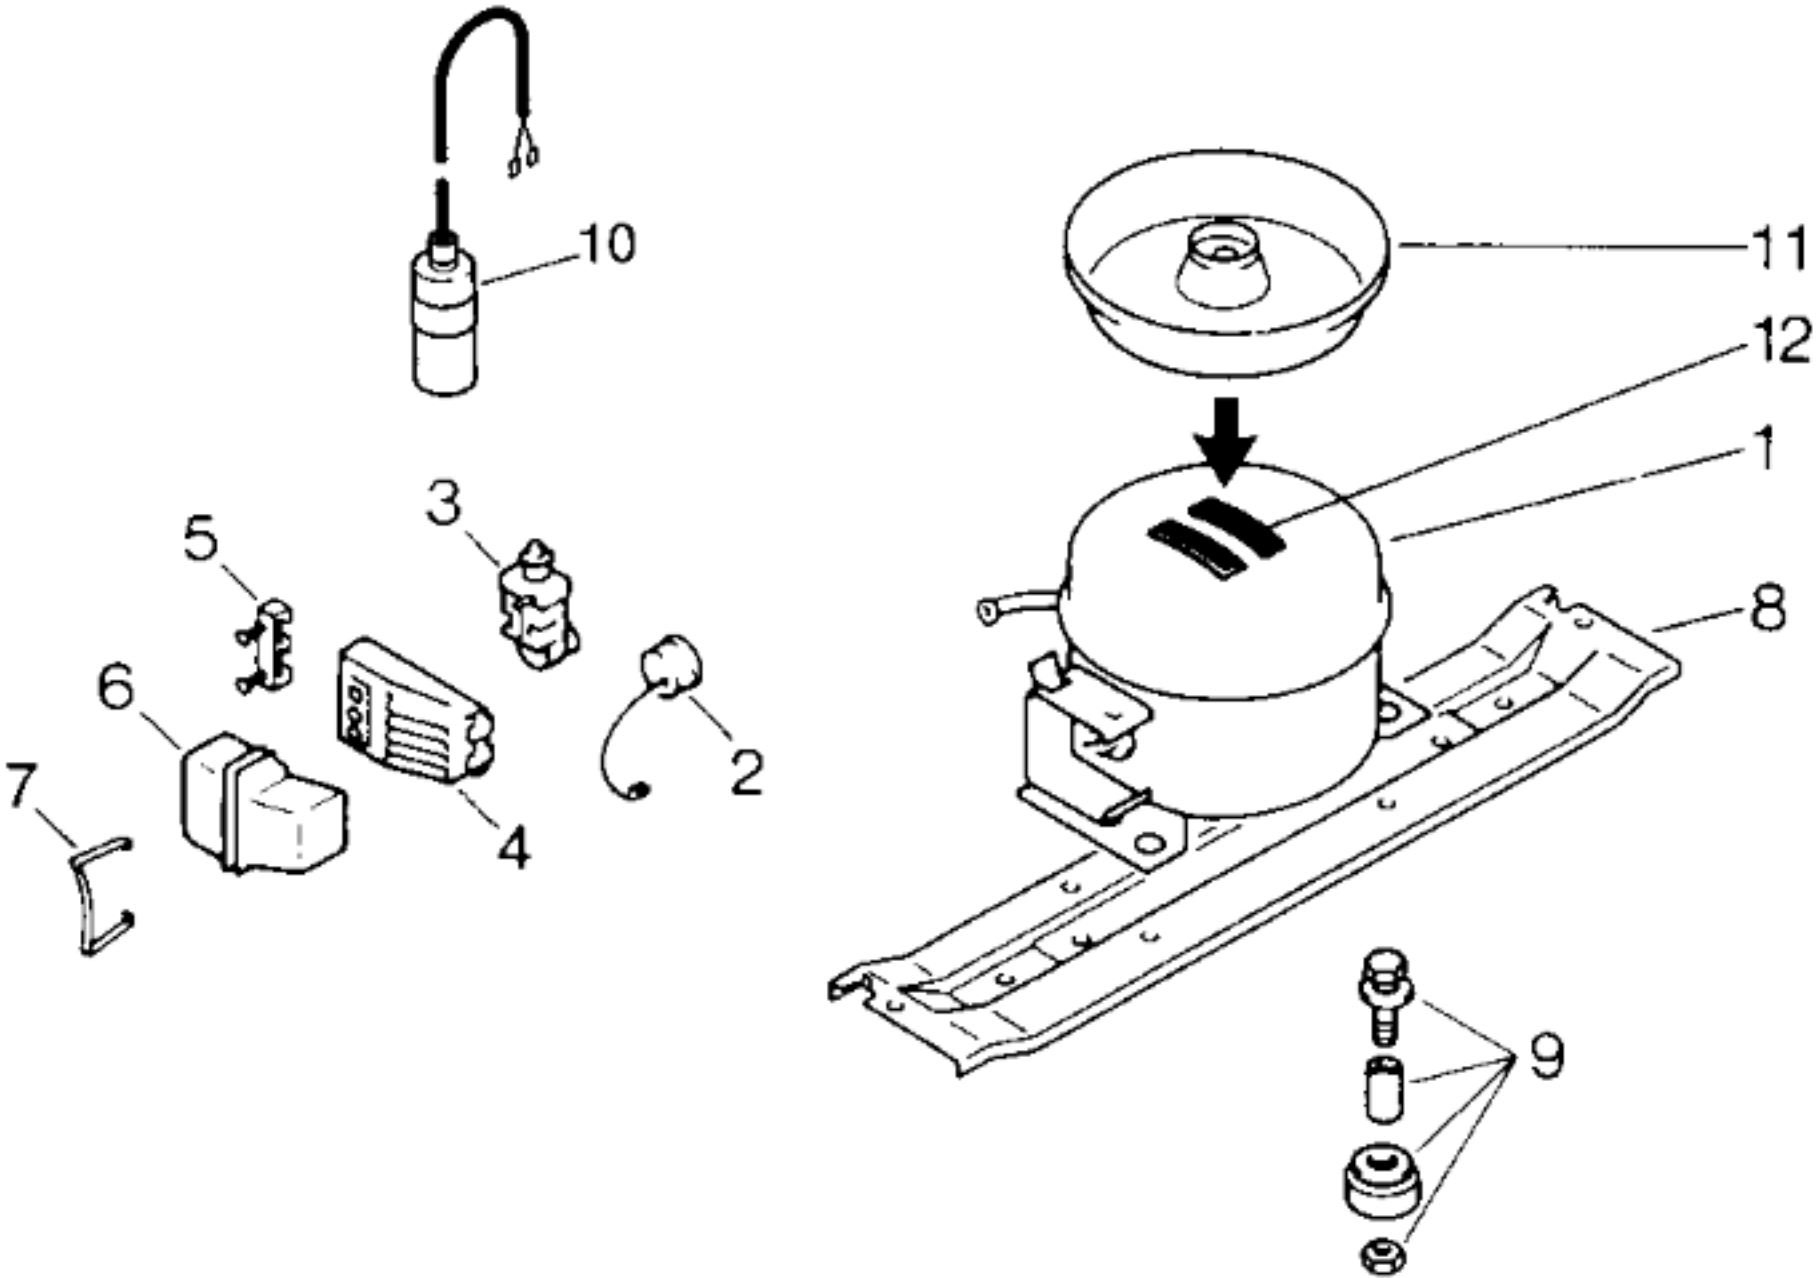

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		D116LRAA		
Forderleistung/Delivery/Débit		l/h	1184	
Anlaufstrom/Starting current/Cour. de démarrage		A	8,75	
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	12,0	
	Hi/aux	Ω	28,7	
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K 59		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/	„ein“	°C	+ 4,5	+ 4,5
Valeurs de commutation	„aus“		- 31,0	- 13,5
(„abtauen“ od.)	„alarm“			
Fullmenge/Fill.quantity/Charge		R12	g	140
Anschlußwert/Conn.load/Puiss. connectée		W	150	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω	8800	
Leistung/Power/Puissance		W	5,5	
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

Pos.	Matsushita		
	D116LRAA		
1	14 0563		
2	05 8506		
3			
4			
5			
6	05 8458		
7	02 6731		
8	28 1825		
9	05 0166		
10	05 9467		
11	08 5182		
12	05 6008		