




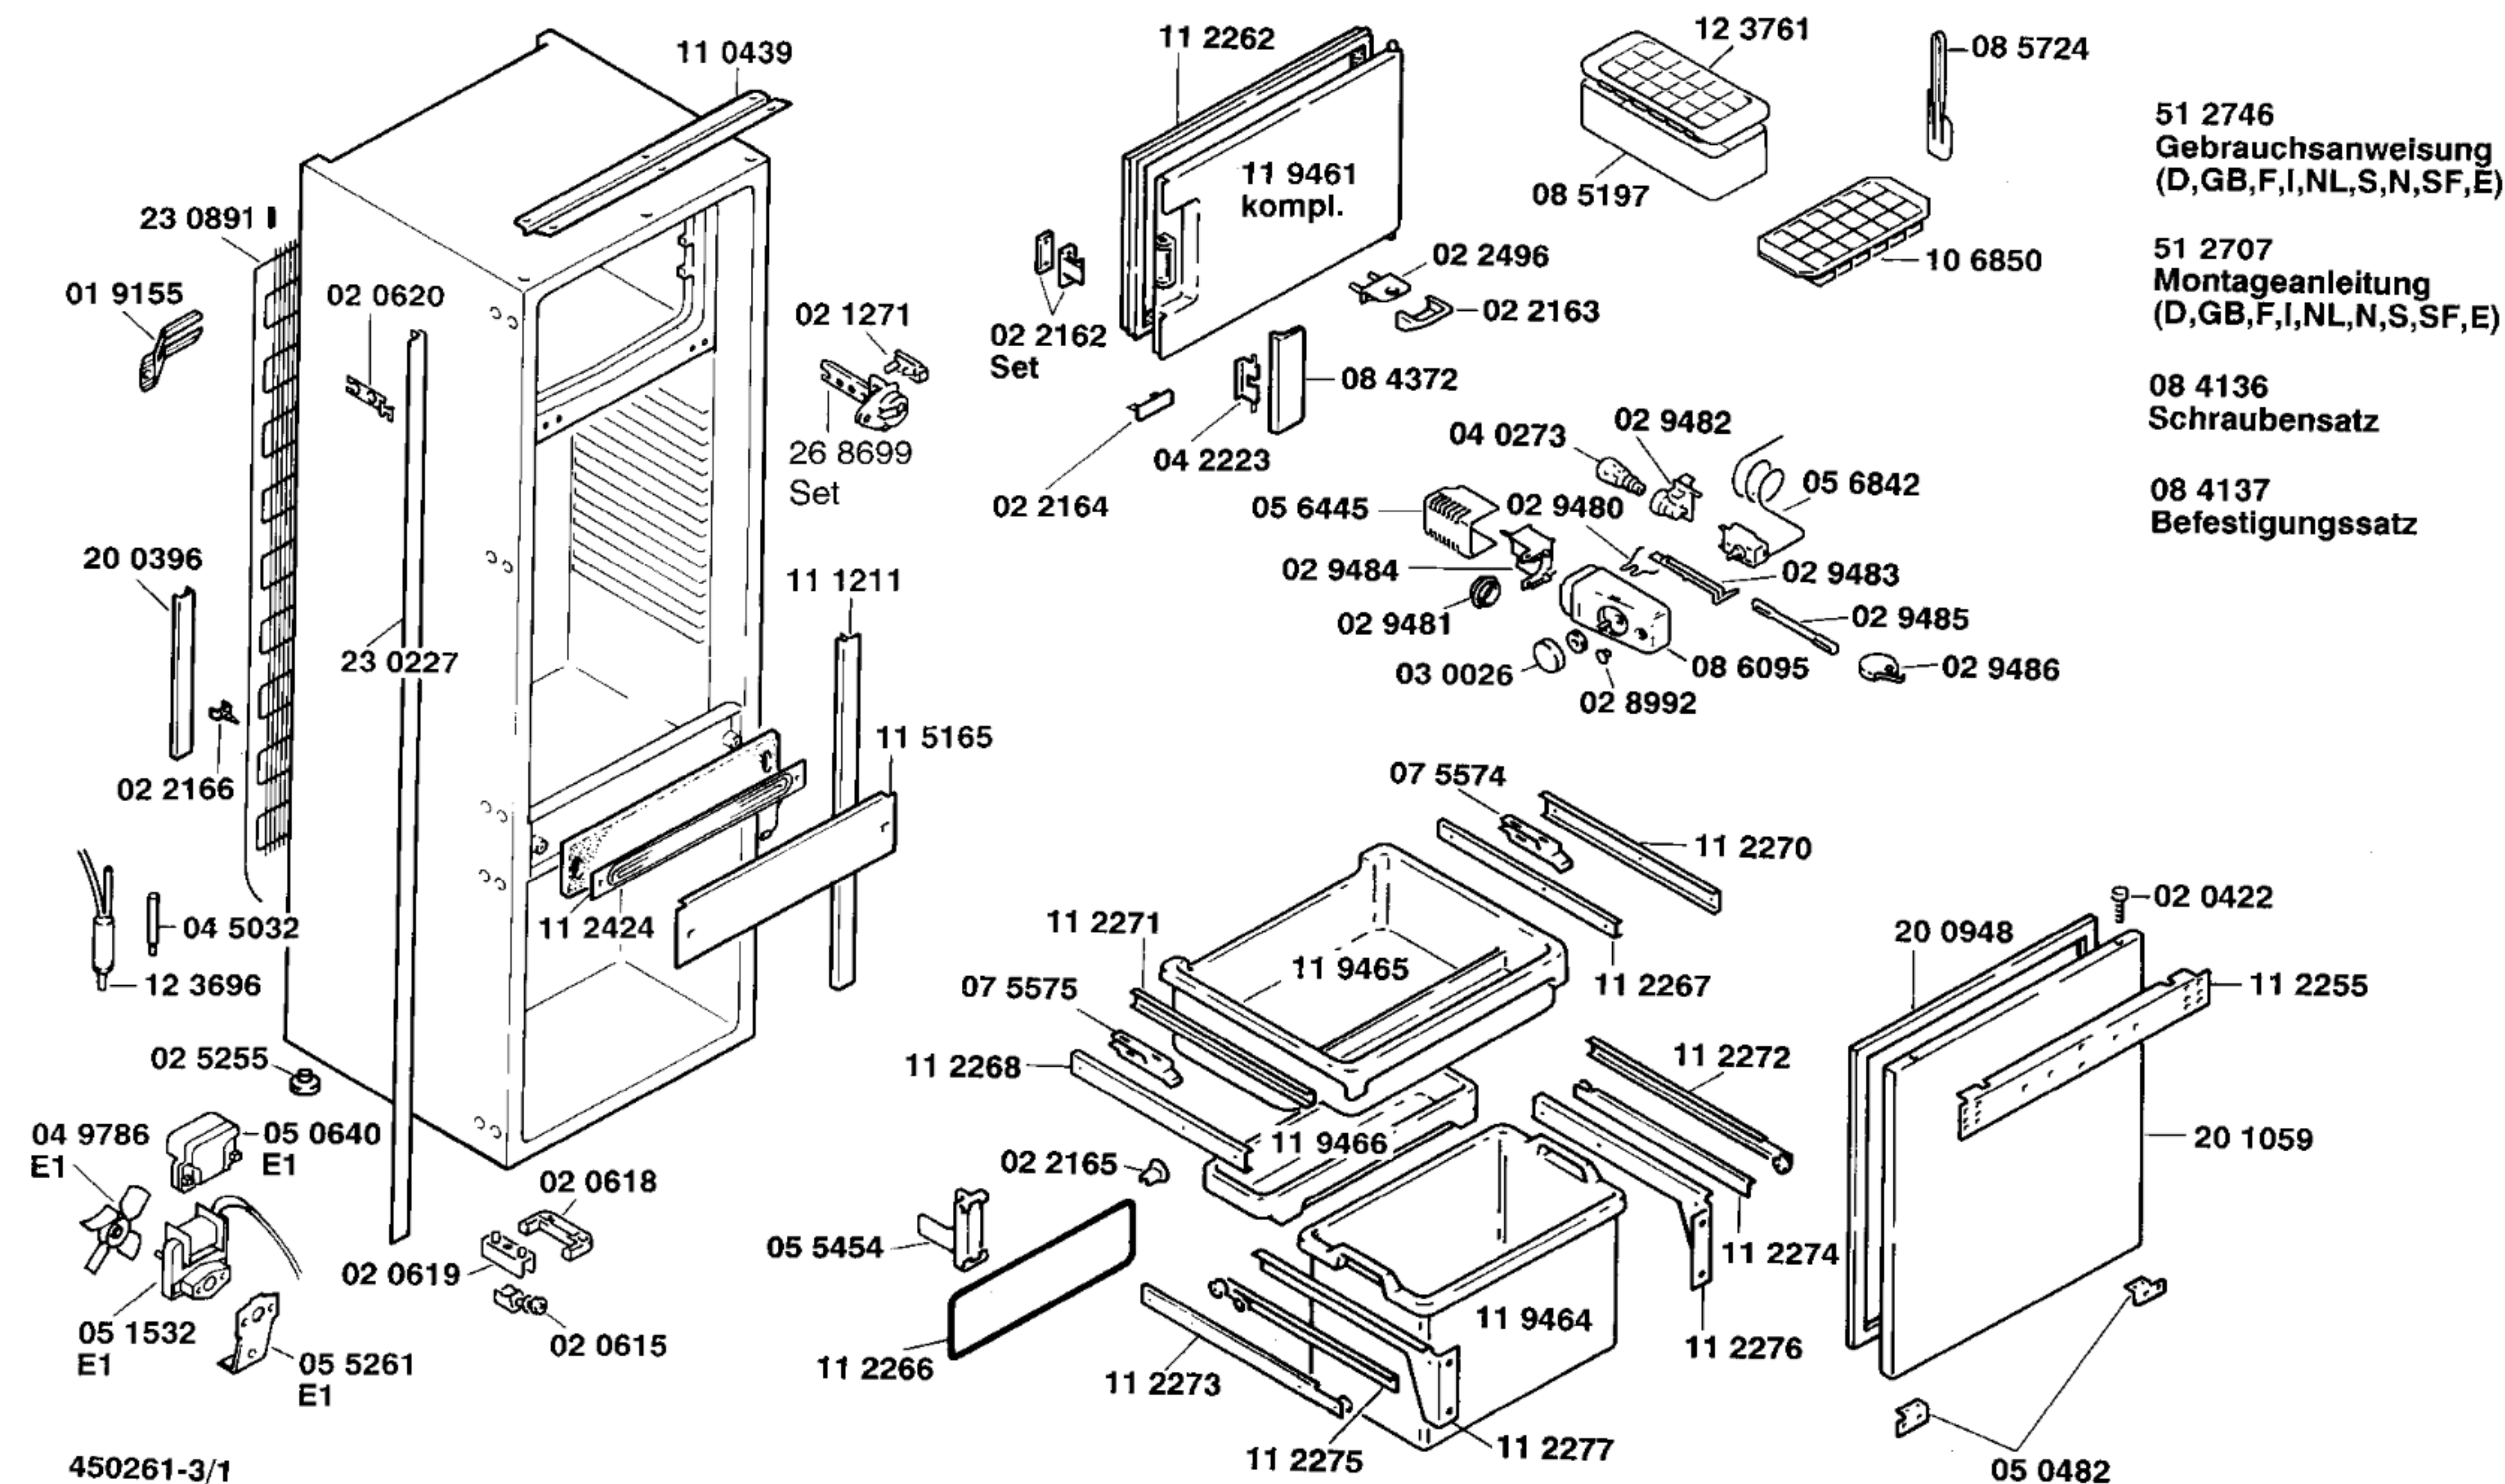

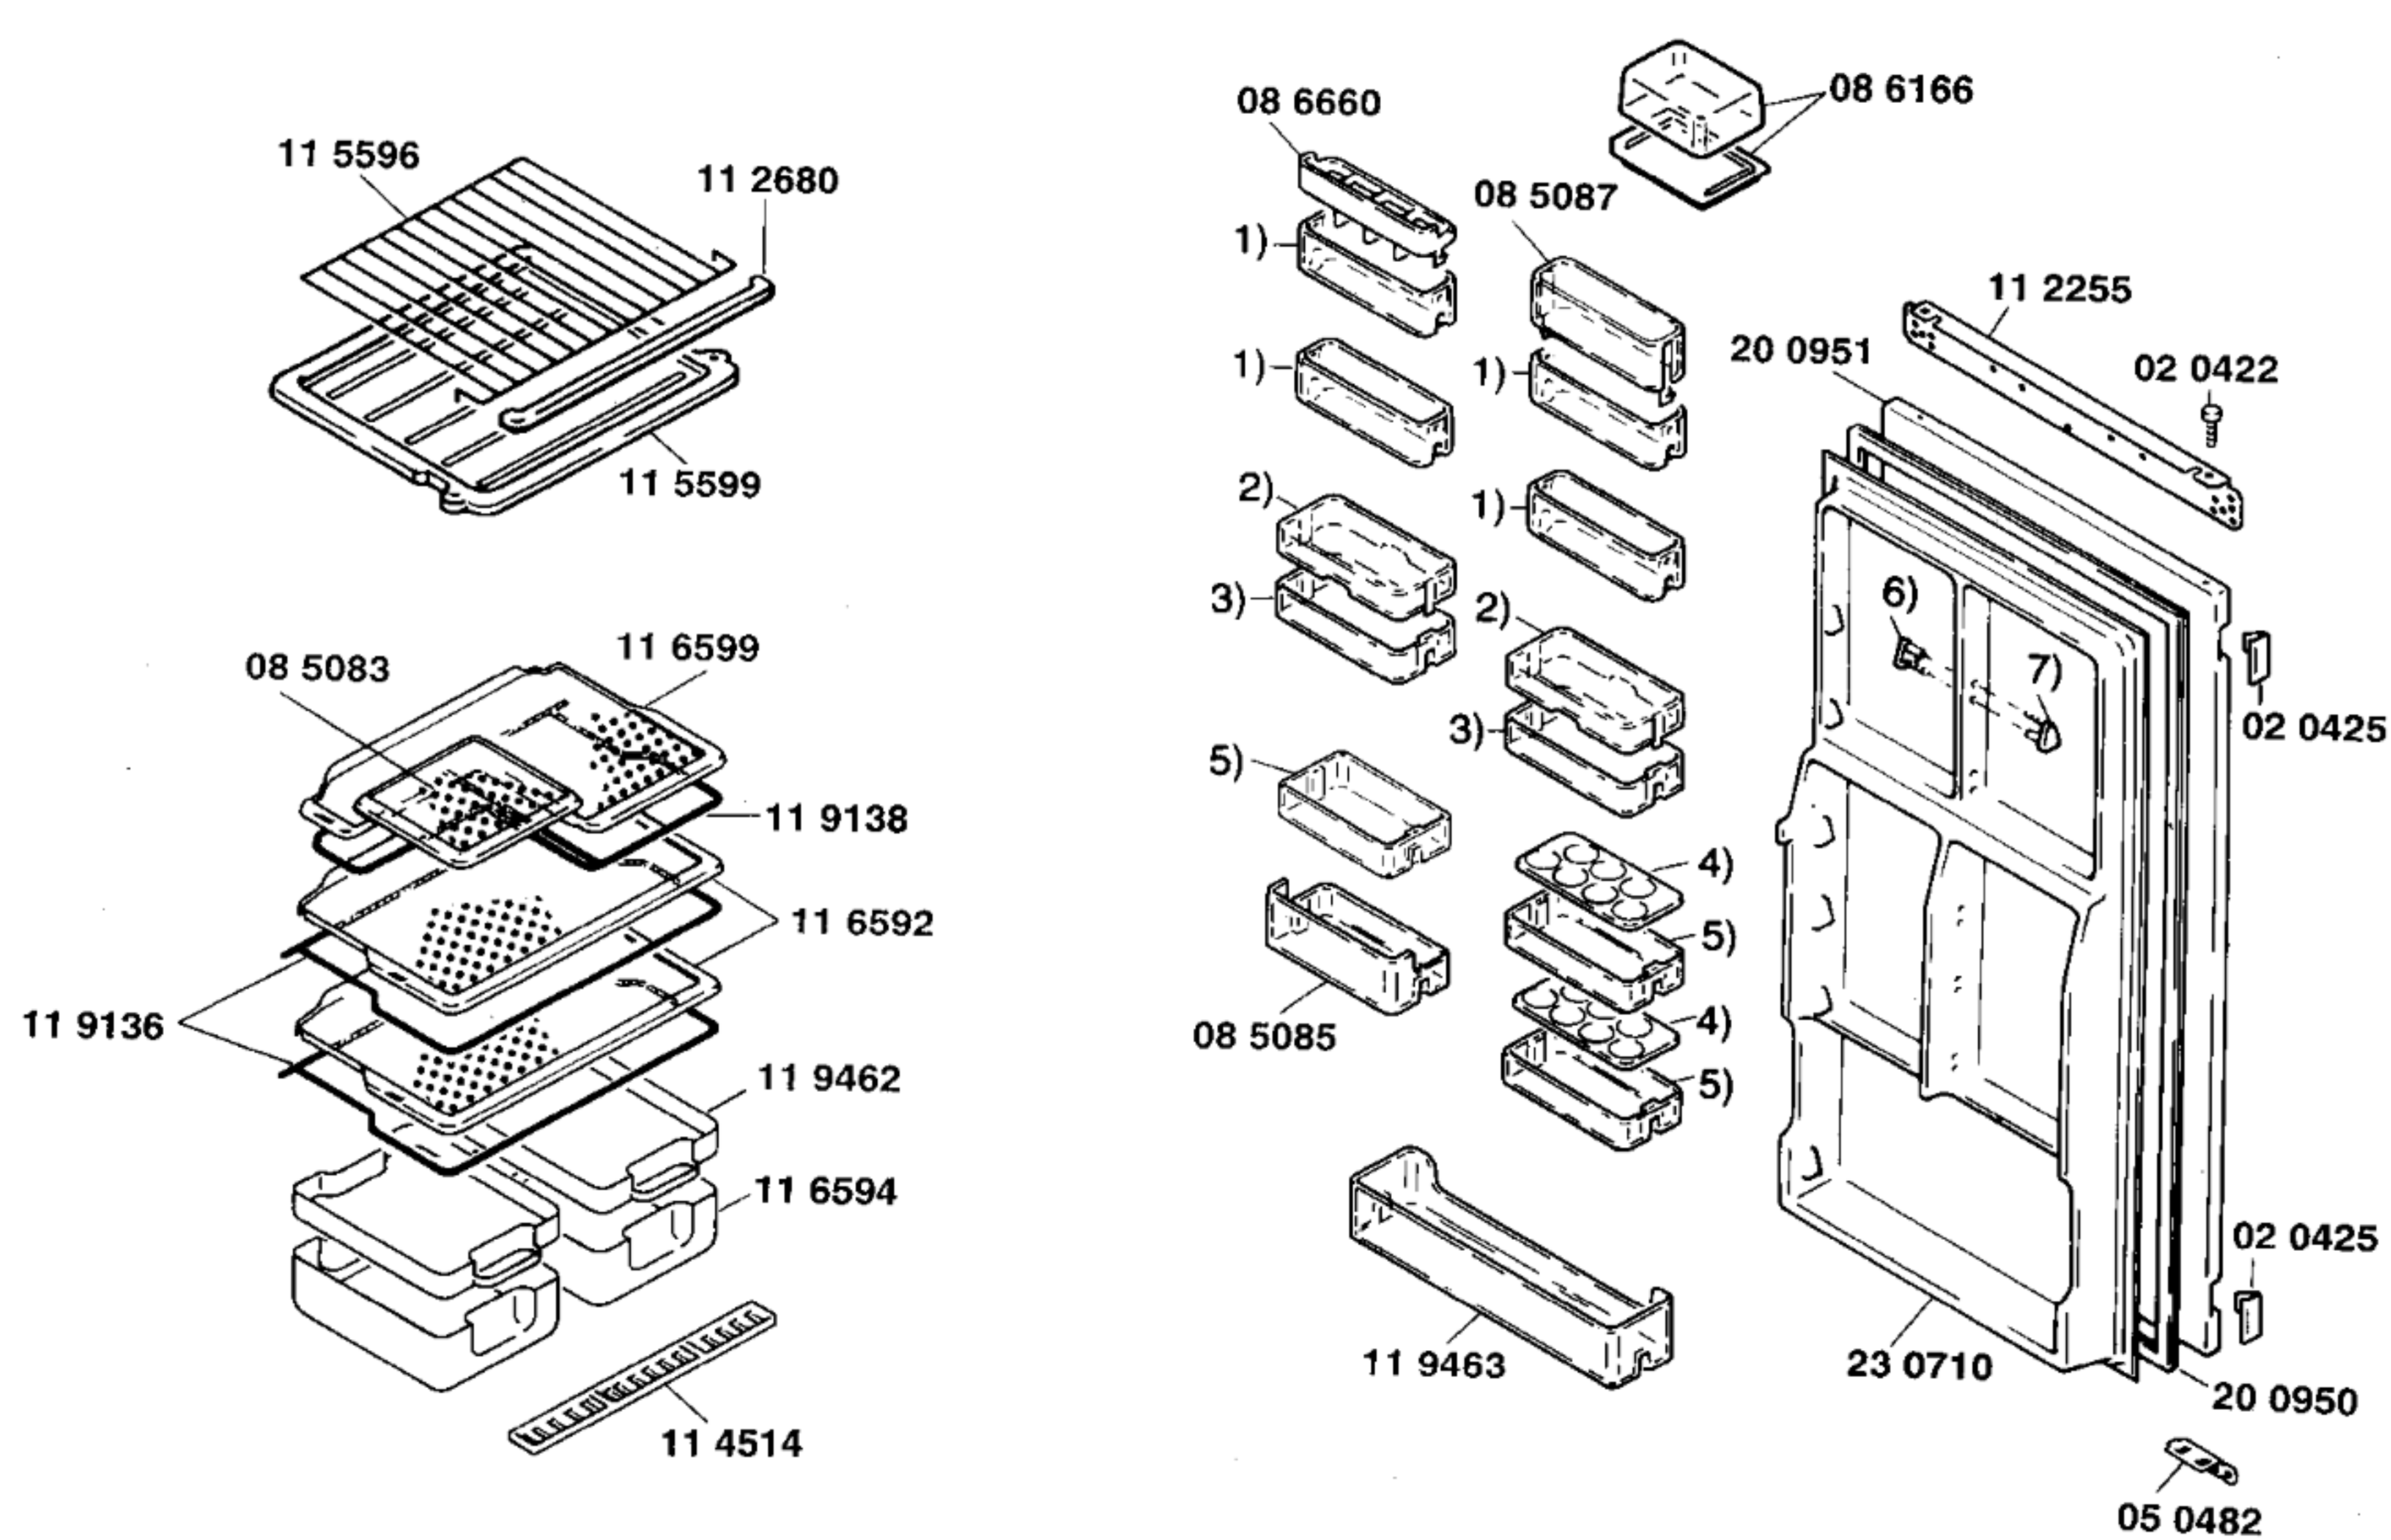

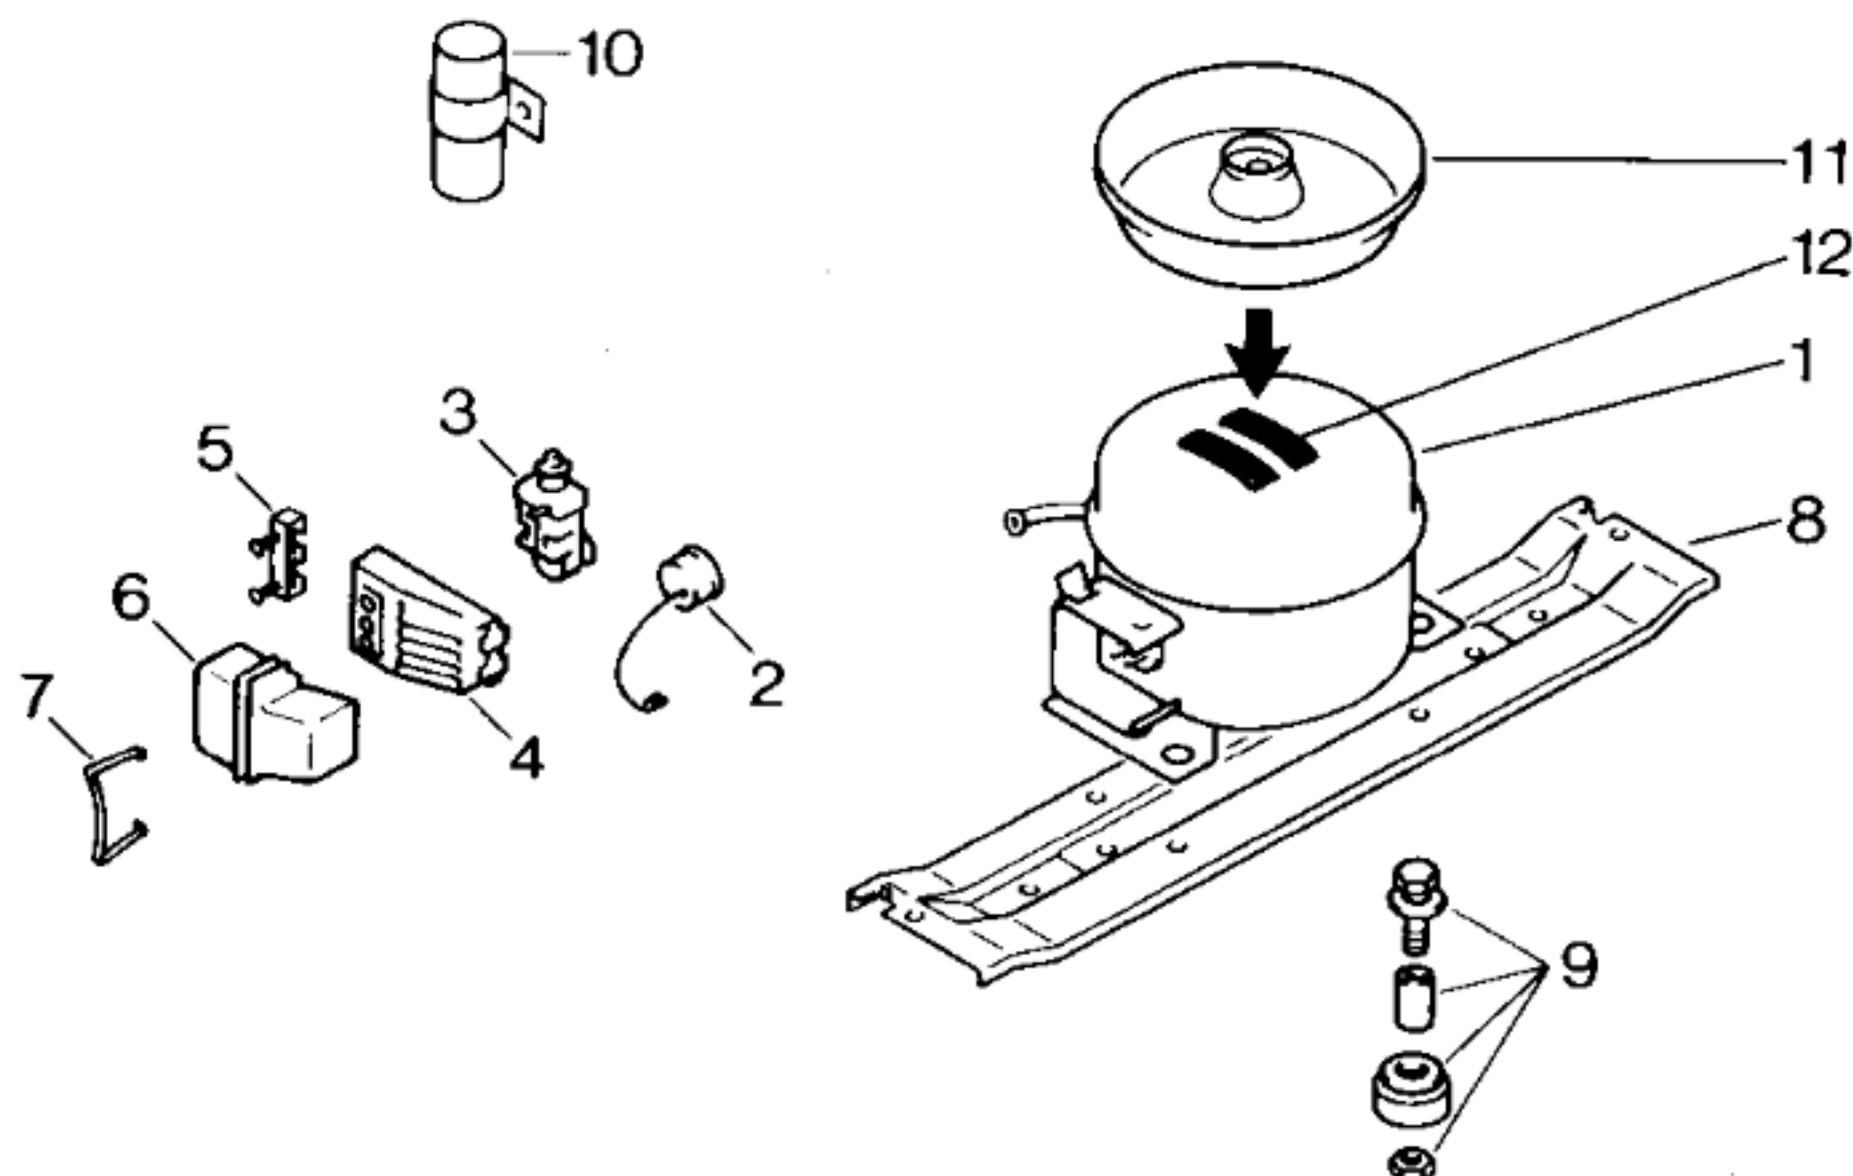

Pos.	EU1,GB1,F1,E1	EU2,GB2	
	Aspera BY 1116 A	Matsushita D116LRRA	
1	14 0405	14 0563	
2	02 6559	05 8506	
3	02 2342		
4	05 1748		
5			
6	05 1746	05 8458	
7	02 2339	02 6731	
8	11 1838	11 1838	
9	05 0166	05 0166	
10			
11	08 5091	08 5182	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur Typ/Type		Aspera BY 1116 A	Matsushita D116LRRA	
Förderleistung/Delivery/Débit	l/h	1450	1184	
Anlaufstrom/Starting current/Cour. de démarrage	A	9,9	8,75	
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω 11,7	12,0	
	Hi/aux	Ω 37,7	28,7	
Temp.-Regler/Thermostat Typ/Type		Ranco K 59		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/ Valeurs de commutation	„ein“ „aus“ („abtauen“ od.)	+ 4,5 - 31,0	+ 4,5 - 13,5	
Fullmenge/Fill.quantity/Charge	R12	g 180		
Anschlußwert/Conn.load/Puiss. connectée	W	150		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω	8800		
Leistung/Power/Puissance	W	5,5		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω	430 ± 10%		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			