



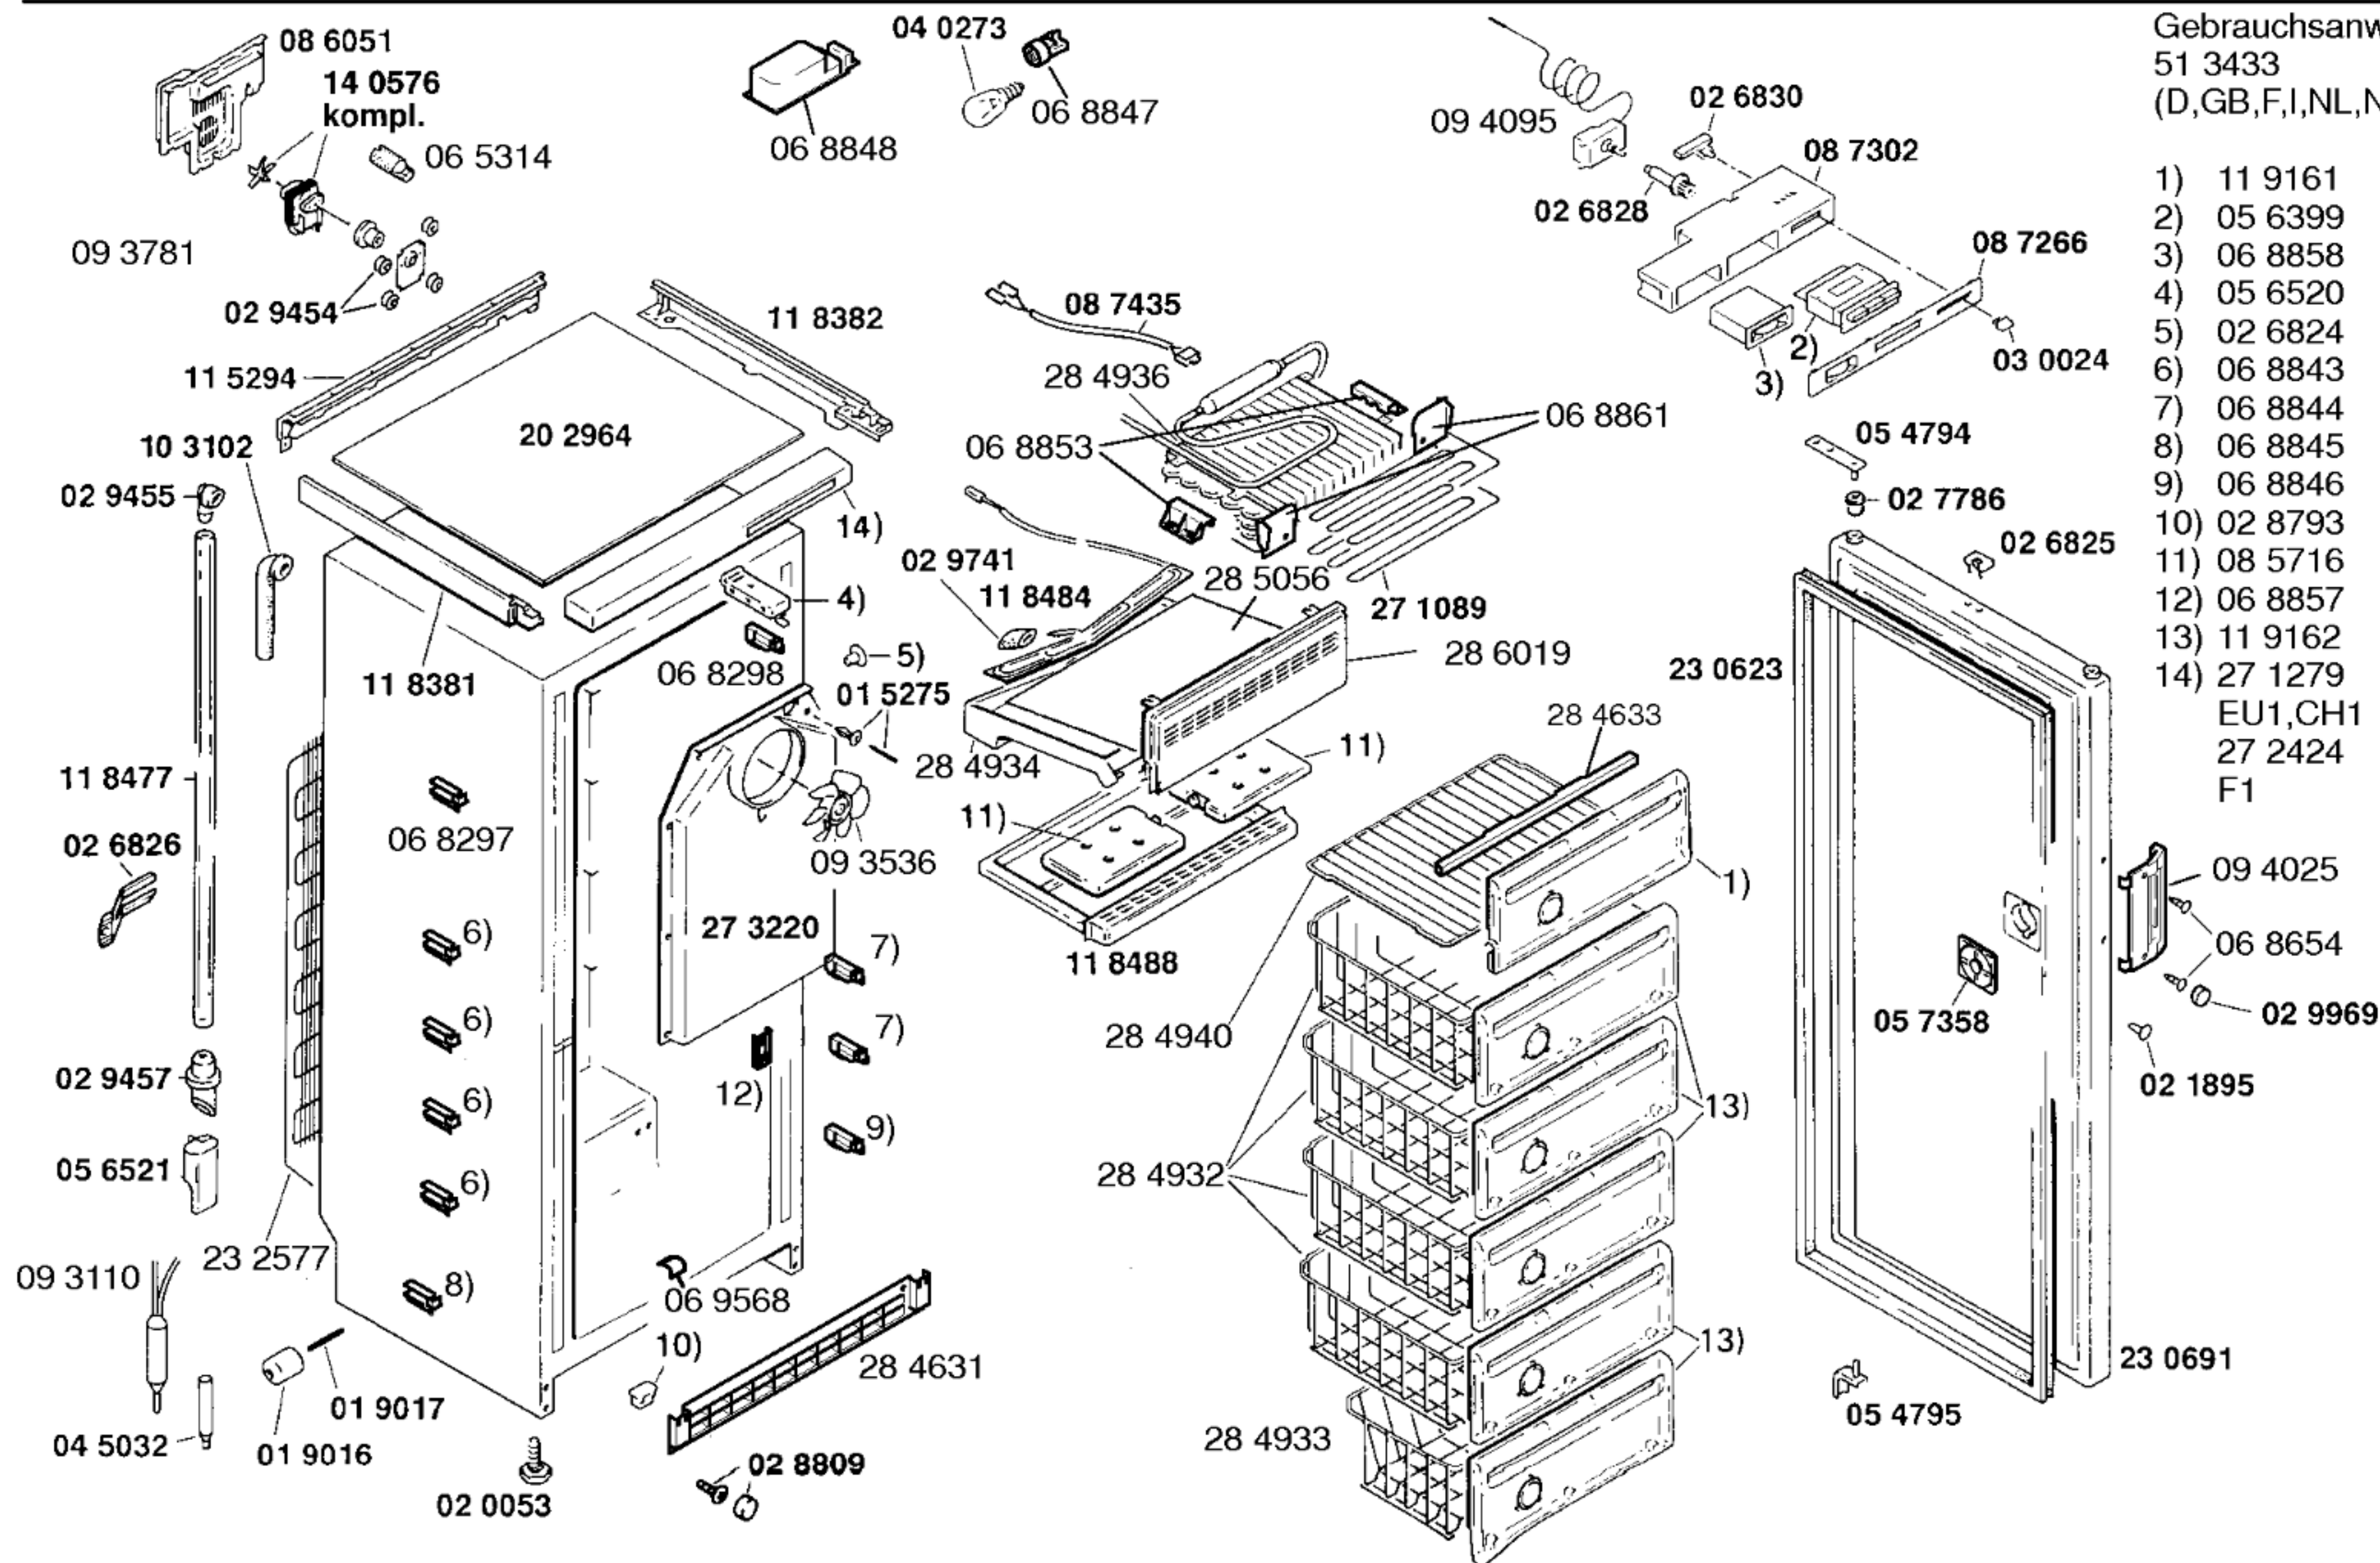

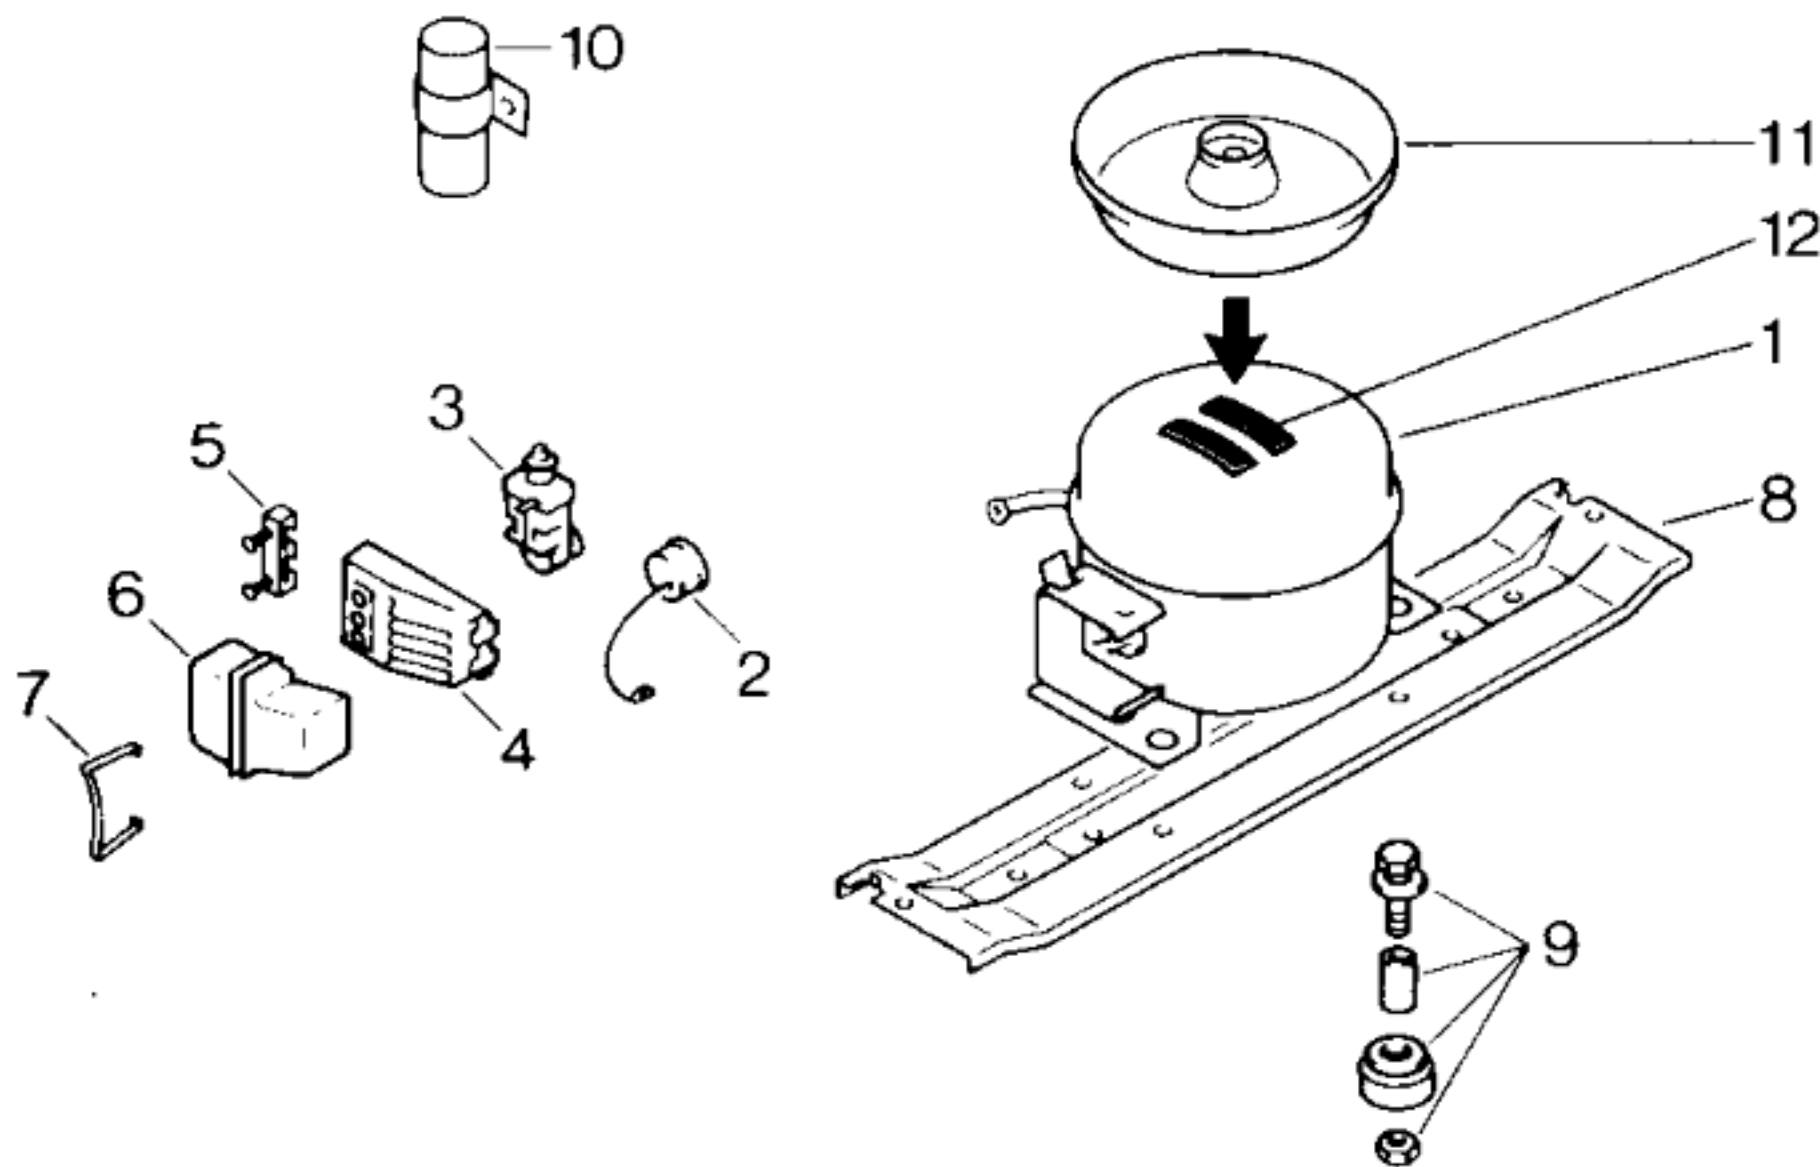

Pos.			
	Matsushita		
	D116LRAA-M26		
1	14 0803		
2			
3	03 2748		
4	05 5516		
5			
6	05 8458		
7	02 6731		
8	11 9114		
9	05 0166		
10	05 8459		
11	08 8535		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		D116LRAA		
Förderleistung/Delivery/Débit		l/h	1184	
Anlaufstrom/Starting current/Cour de démarrage		A	8,75	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	12,0	
		Hi/aux Ω	28,7	
Temp.-Regler/Thermostat		Danfoss		
Typ/Type		2156		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/Valeurs de commutation		„ein“ $^{\circ}\text{C}$	-26,9	-20
		„aus“	-33,5	-25
		(„abtauen“ od.) „alarm“	-22,5	-14
Füllmenge/Fill.quantity/Charge		R12	g	220
Anschlußwert/Conn.load/Puiss. connectée		W	150	
Heizung/Heater/Chauffage		Abtauheizung		
Widerstand/Resistance/Résistance		Ω	173	Rinnenheizung 6050
Leistung/Power/Puissance		W	333	9,5
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω	340	
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		