


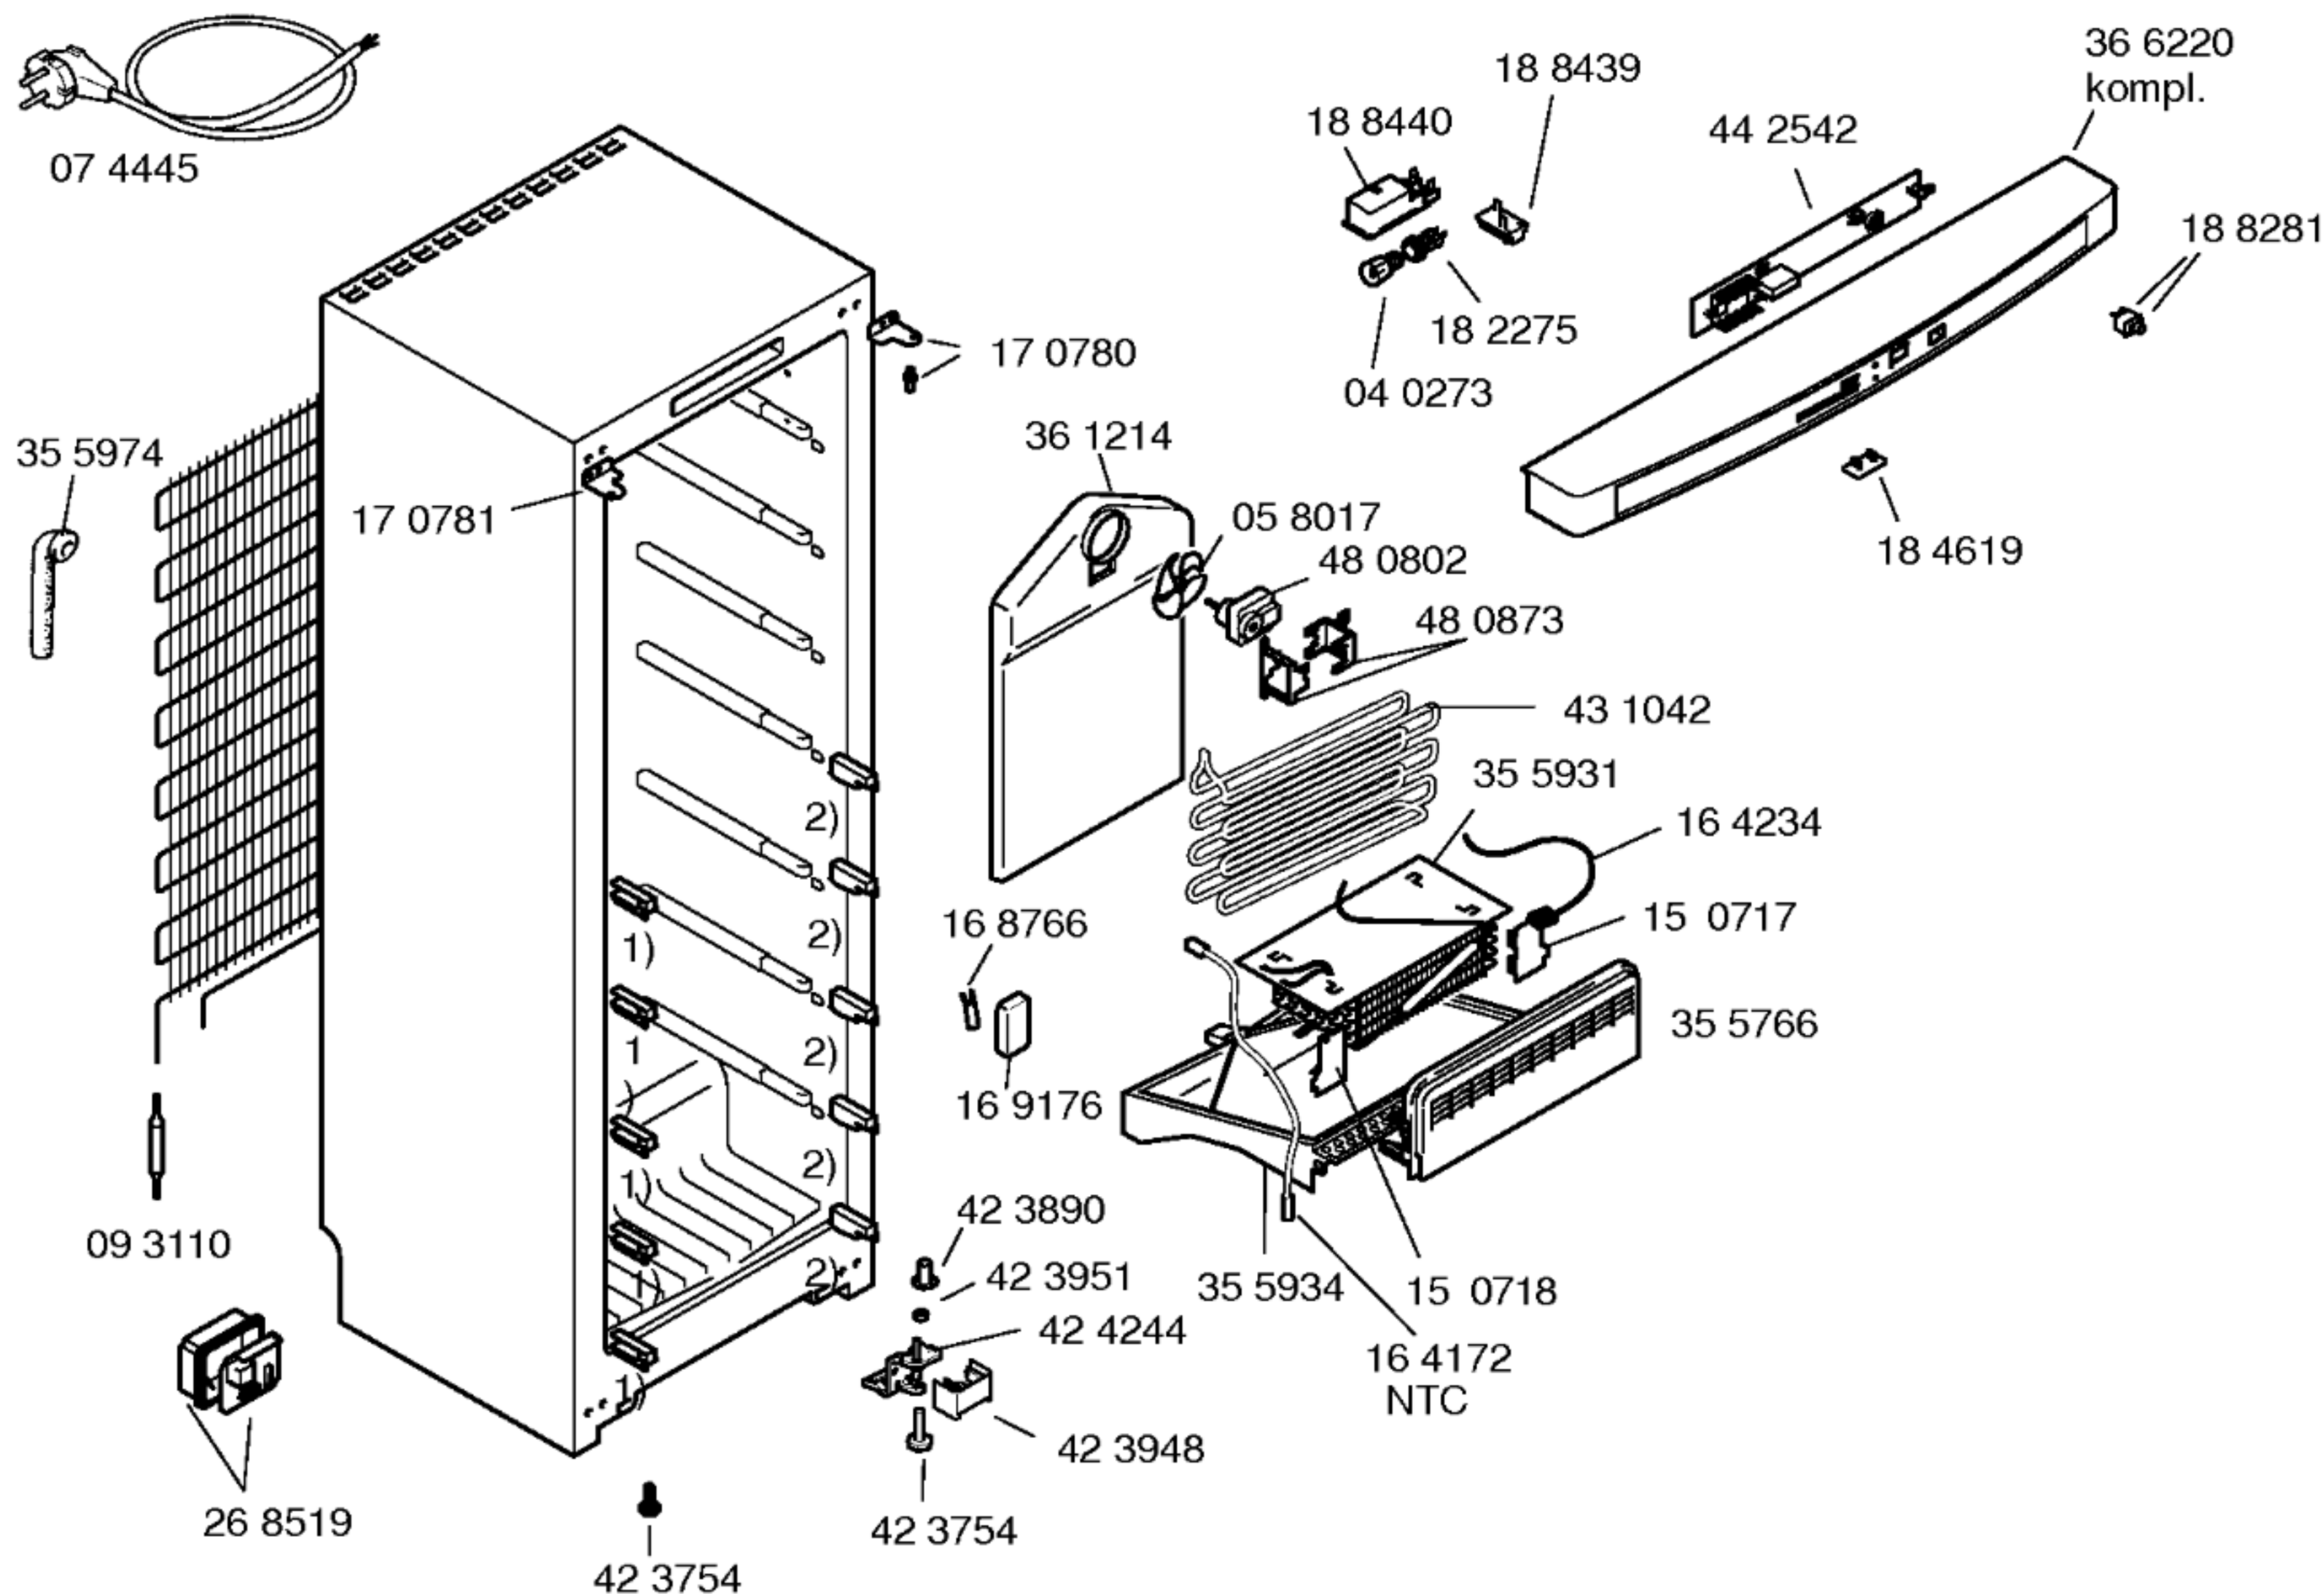

Mat. - Nr. - Konstante
3740




Gebrauchsanweisung
59 6933
(de,en,fr,it,n,es,ptl)
Montageanleitung
58 9231
Beistellsatz
49 3072


Side by Side
Beistellsatz zu KSR/KSK
48 1044

Gefrierraumteiler
35 3678

1) 17 1455
2) 17 1454

Mat. – Nr. – Konstante
3740
Kleinteilesatz
42 2336

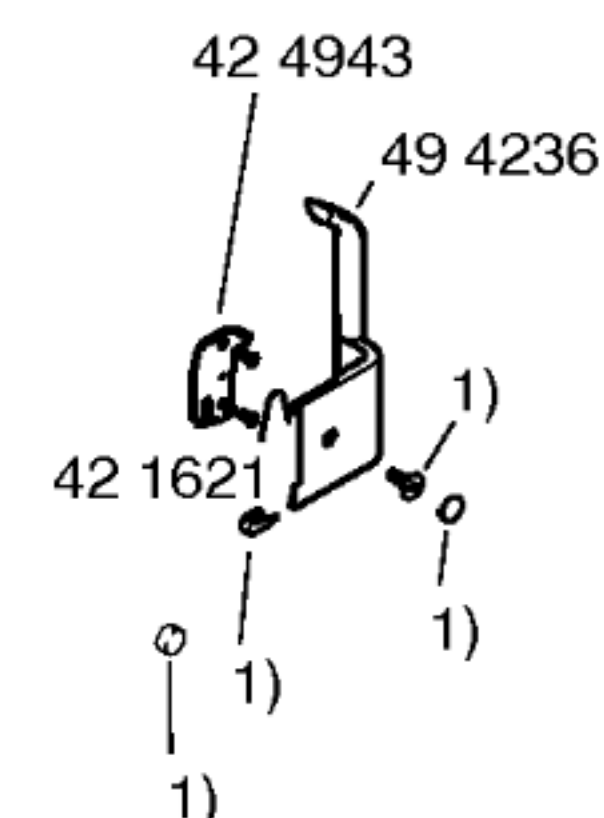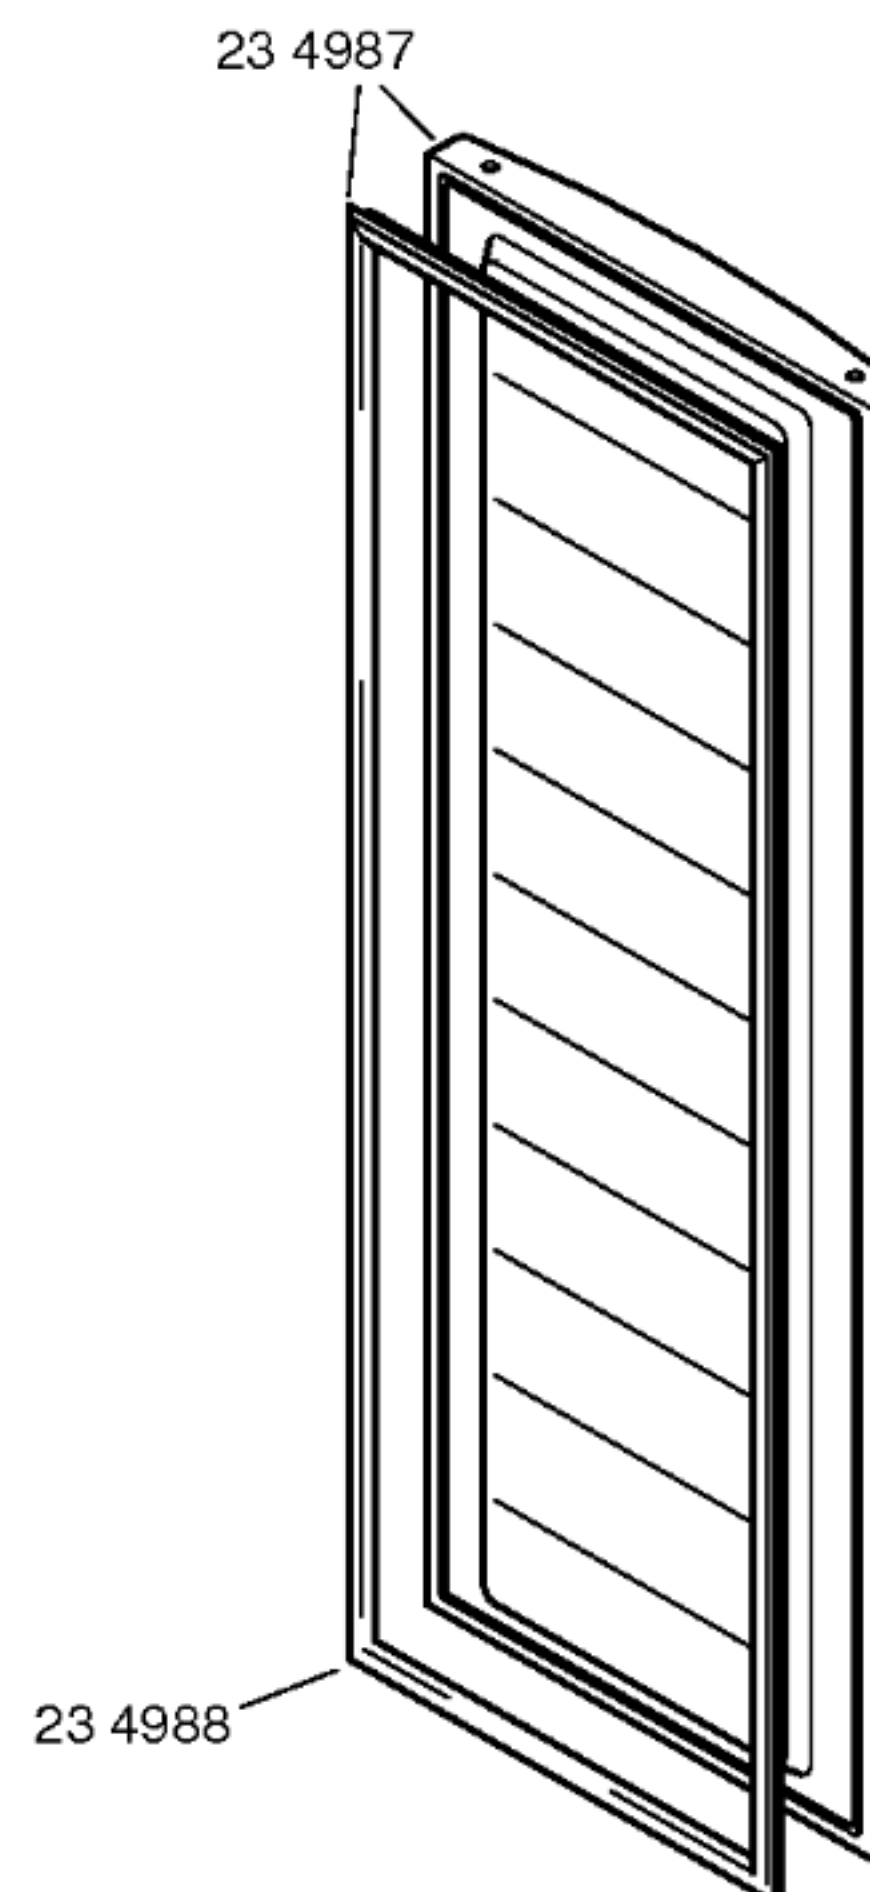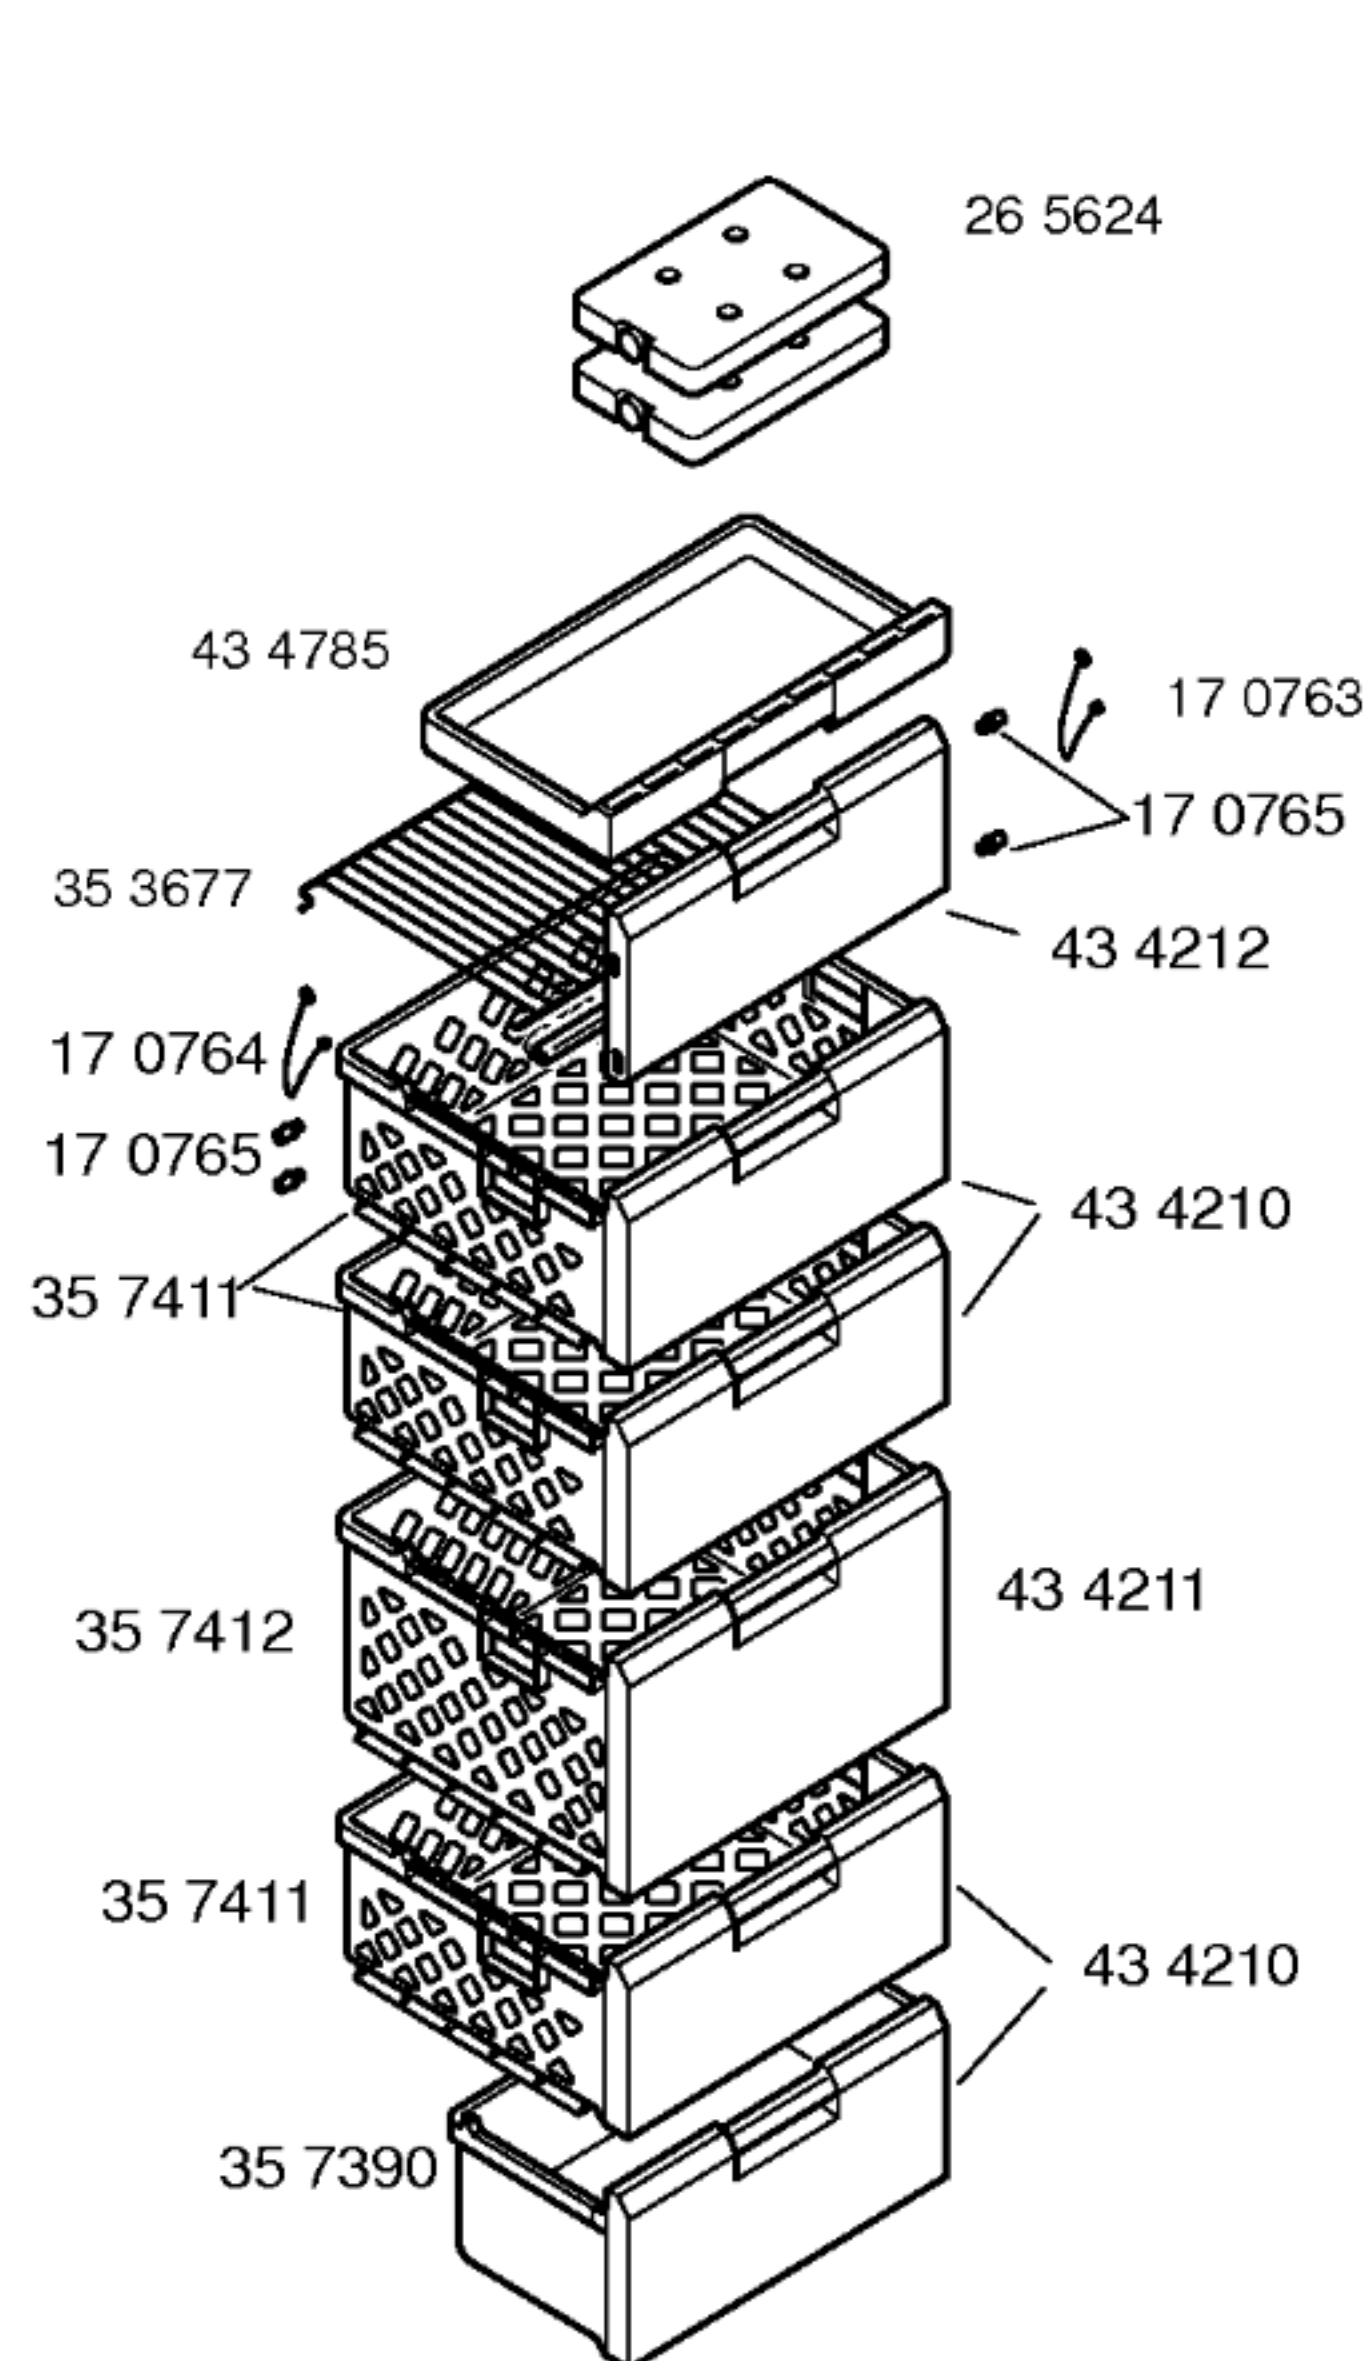

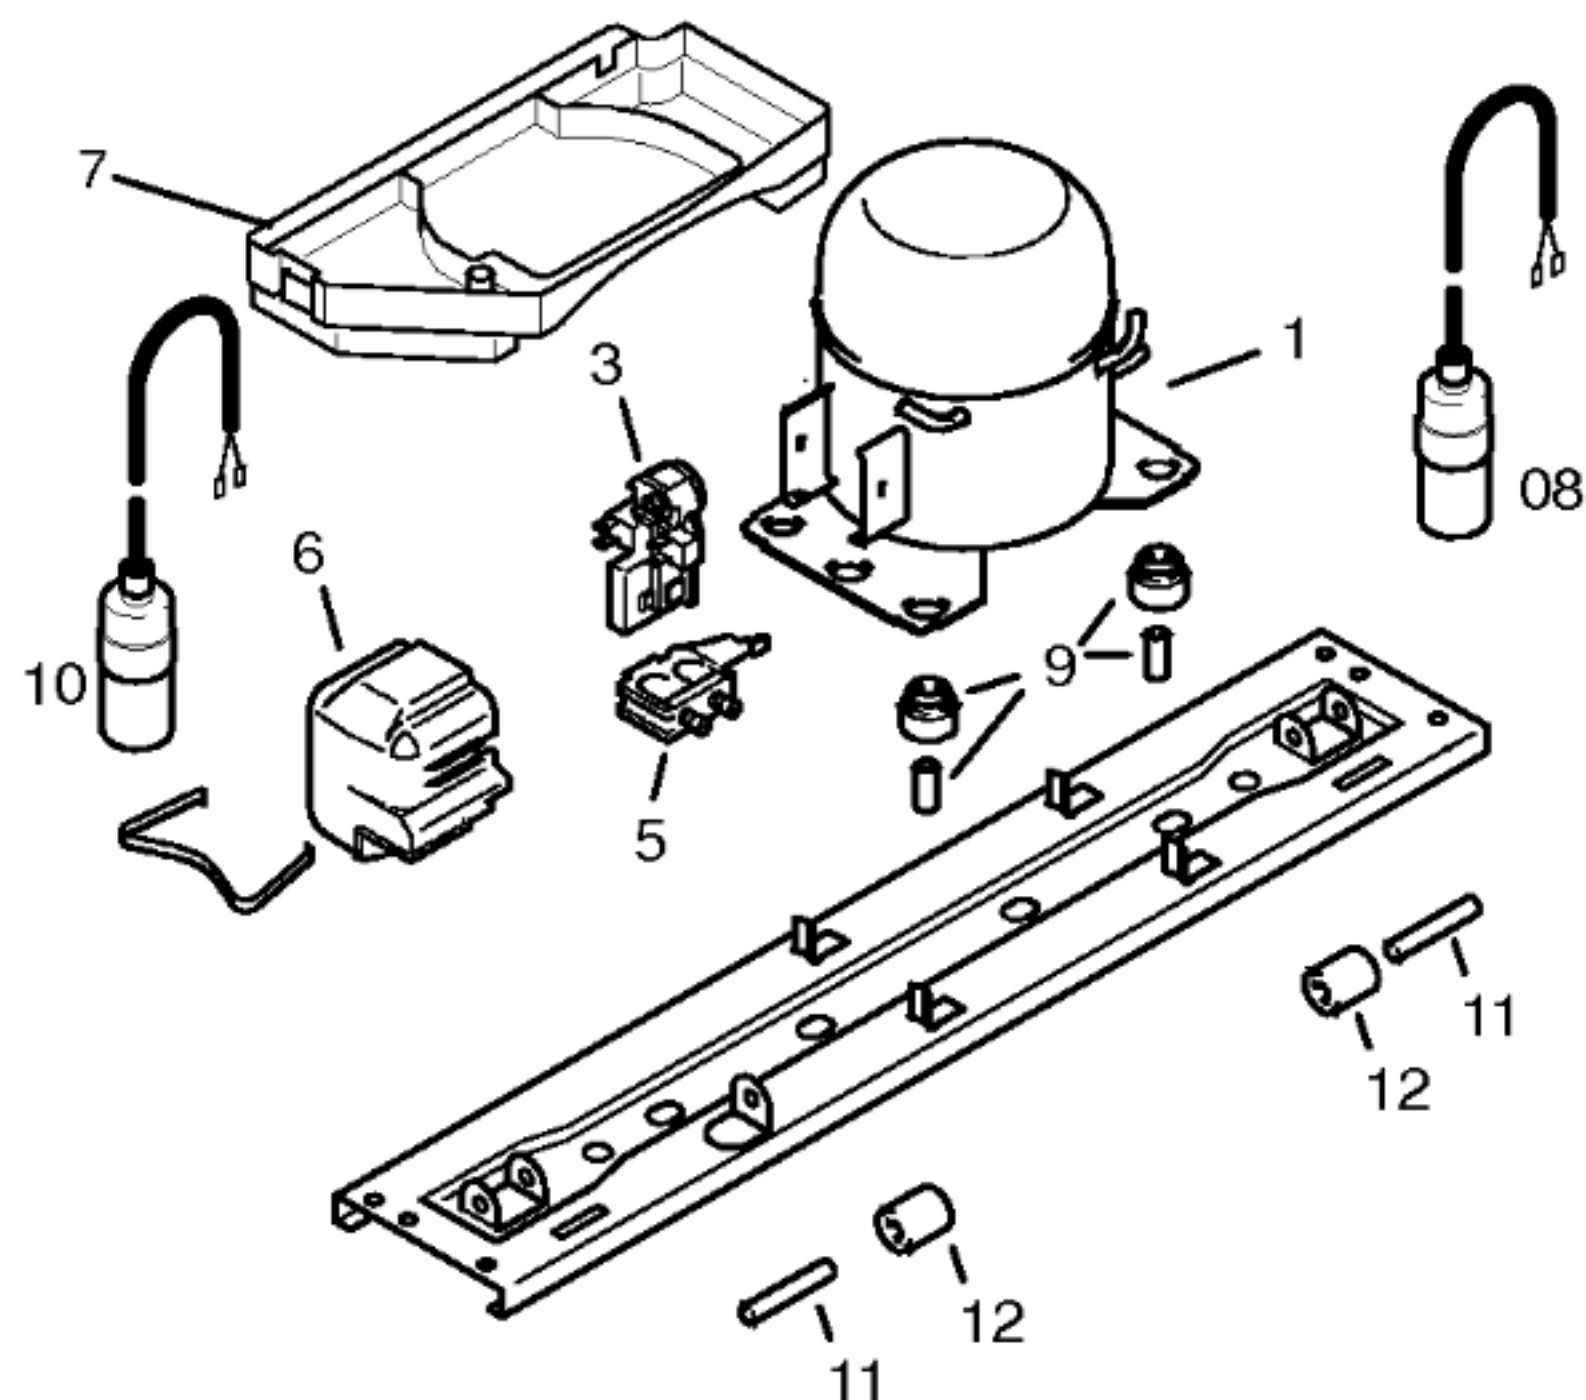

	V01	V02-V04	
	Danfoss	Matsushita	
Pos.	NLE 15KK2	DGX125E	
1	14 3602	14 3533	
2			
3	15 1055	41 8044	
4			
5	15 0760	18 3590	
6	15 1072	41 8045	
7	09 6212	08 4744	
8		42 8629	
9	05 0166	05 0166	
10	15 2222	42 8629	
11	01 9017	01 9017	
12	01 9016	01 9016	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES						
Verdichter/Compressor/Compresseur		Danfoss		Matsushita		
Typ/Type		NLE15KK4		DGX125E		
Förderleistung/Delivery/Débit		l/h	2637	2250		
Anlaufstrom/Starting current/Cour de démarrage		A	10,0	0,6		
Widerstand/Resistance/Résistance		Ha/main/prin	10,0	12,3		
		Hi/aux	12,0	23,4		
Temp.-Regler/Thermostat		Elektronisch				
Typ/Type		EIN AUS				
Regelstellung/Position		-15 -16				
Schaltwerte/Switching values		"warm"	-19	-20		
Valeurs de commutation		"kalt"	-23	-24		
		"alarm"	0	14		
Füllmenge/Fill quantity/Charge		R600a	*	*		
Anschlußwert/Conn.load/Puiss. connectée		W	160	120		
Heizung/Heater/Chauffage		Abtauheizung		Rinnenheizung		
Widerstand/Resistance/Résistance		W	288	240		
Leistung/Power/Puissance		W	200	24		
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance		W	560			
Raumtemperaturfühler 2%		C	K	C	K	
		+10	9,9	-18	43,3	
		+ 5	12,7	-22	54,6	
		+ 0	16,3	-26	69,4	
Widerstand NTC 1%		°C	kW	°C	kW	°C
		-1	17,3	-15	36,5	-20
		-9	26,2	-16	38,8	-23
		-14	34,5	-19	45,9	-24
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		W				
Spannung/Voltage/Tension		V				

* siehe Typenschild