
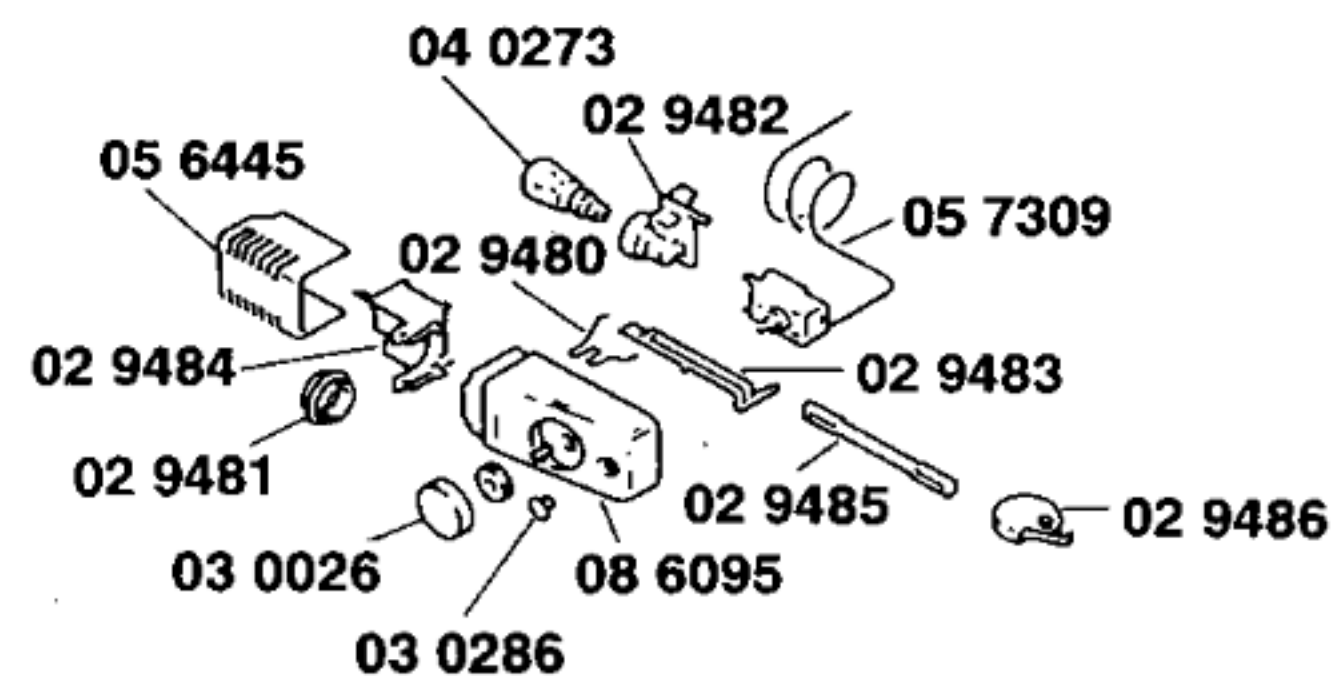


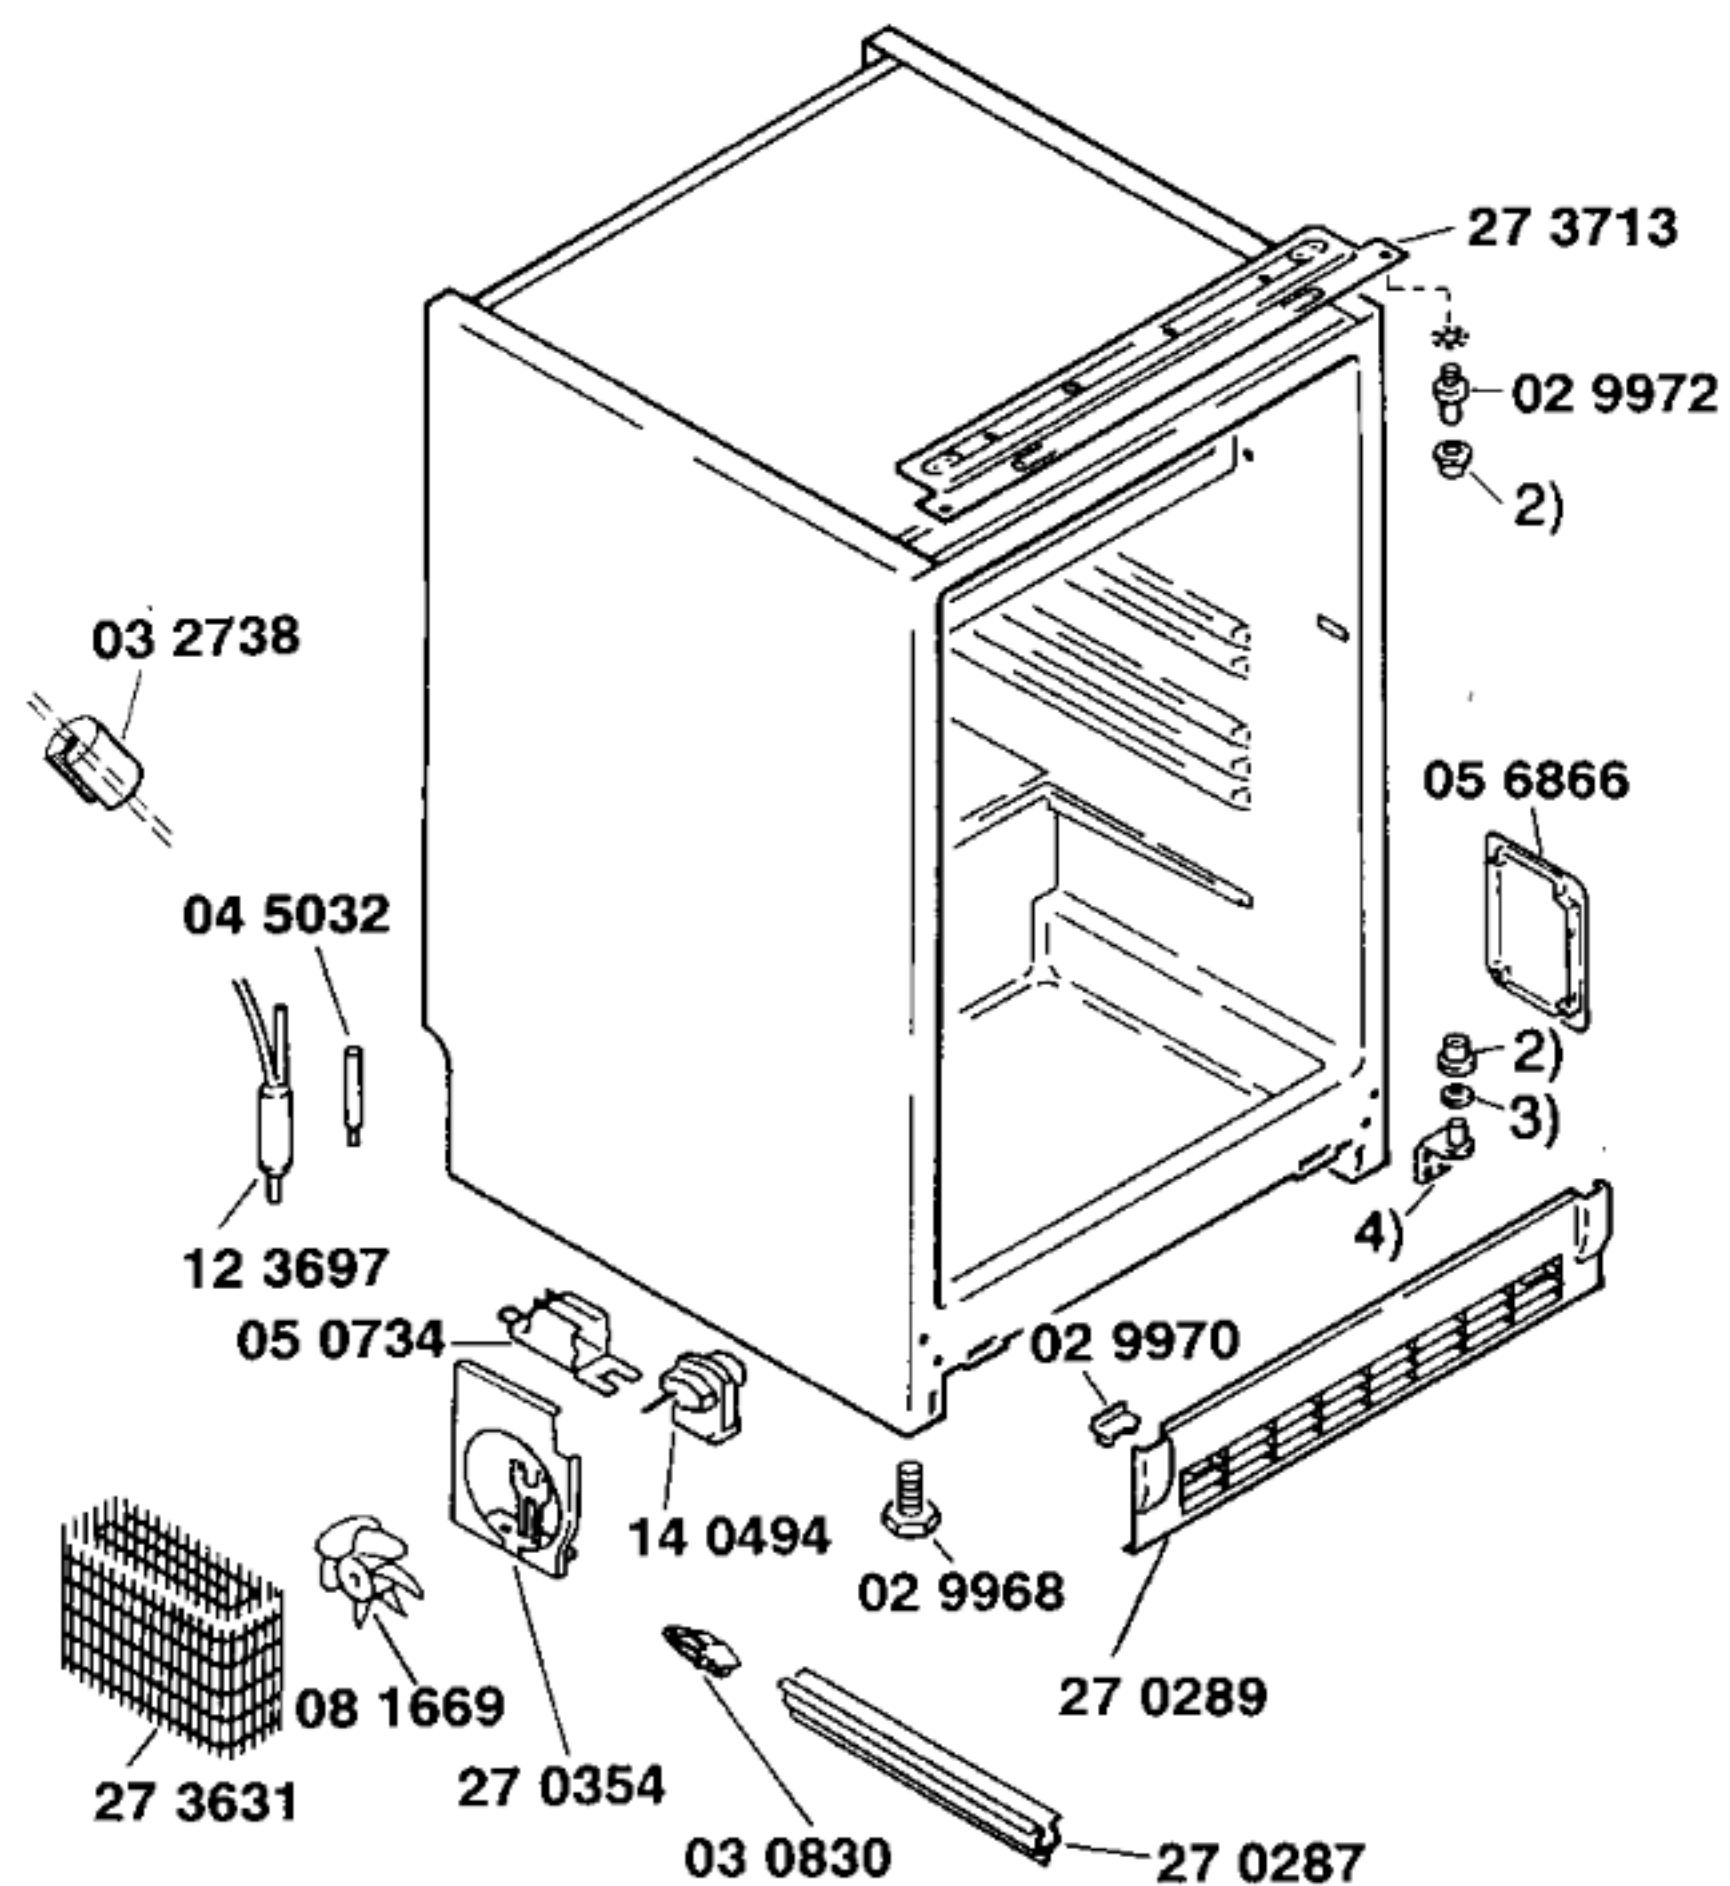


51 4330
Gebrauchsanweisung
(D,GB,F,I,NL,S,SF,
E,P,DK,N)
51 4009
Montageanweisung
(D,GB,F,I,NL,S,SF,
E,P,DK,N)


2) 01 9257
3) 02 0605
4) 02 9971

Zubehör:

Dekorrahmen
Z4110A1,Alu
Z4110W1,weiss

Sockel
Z4510X0



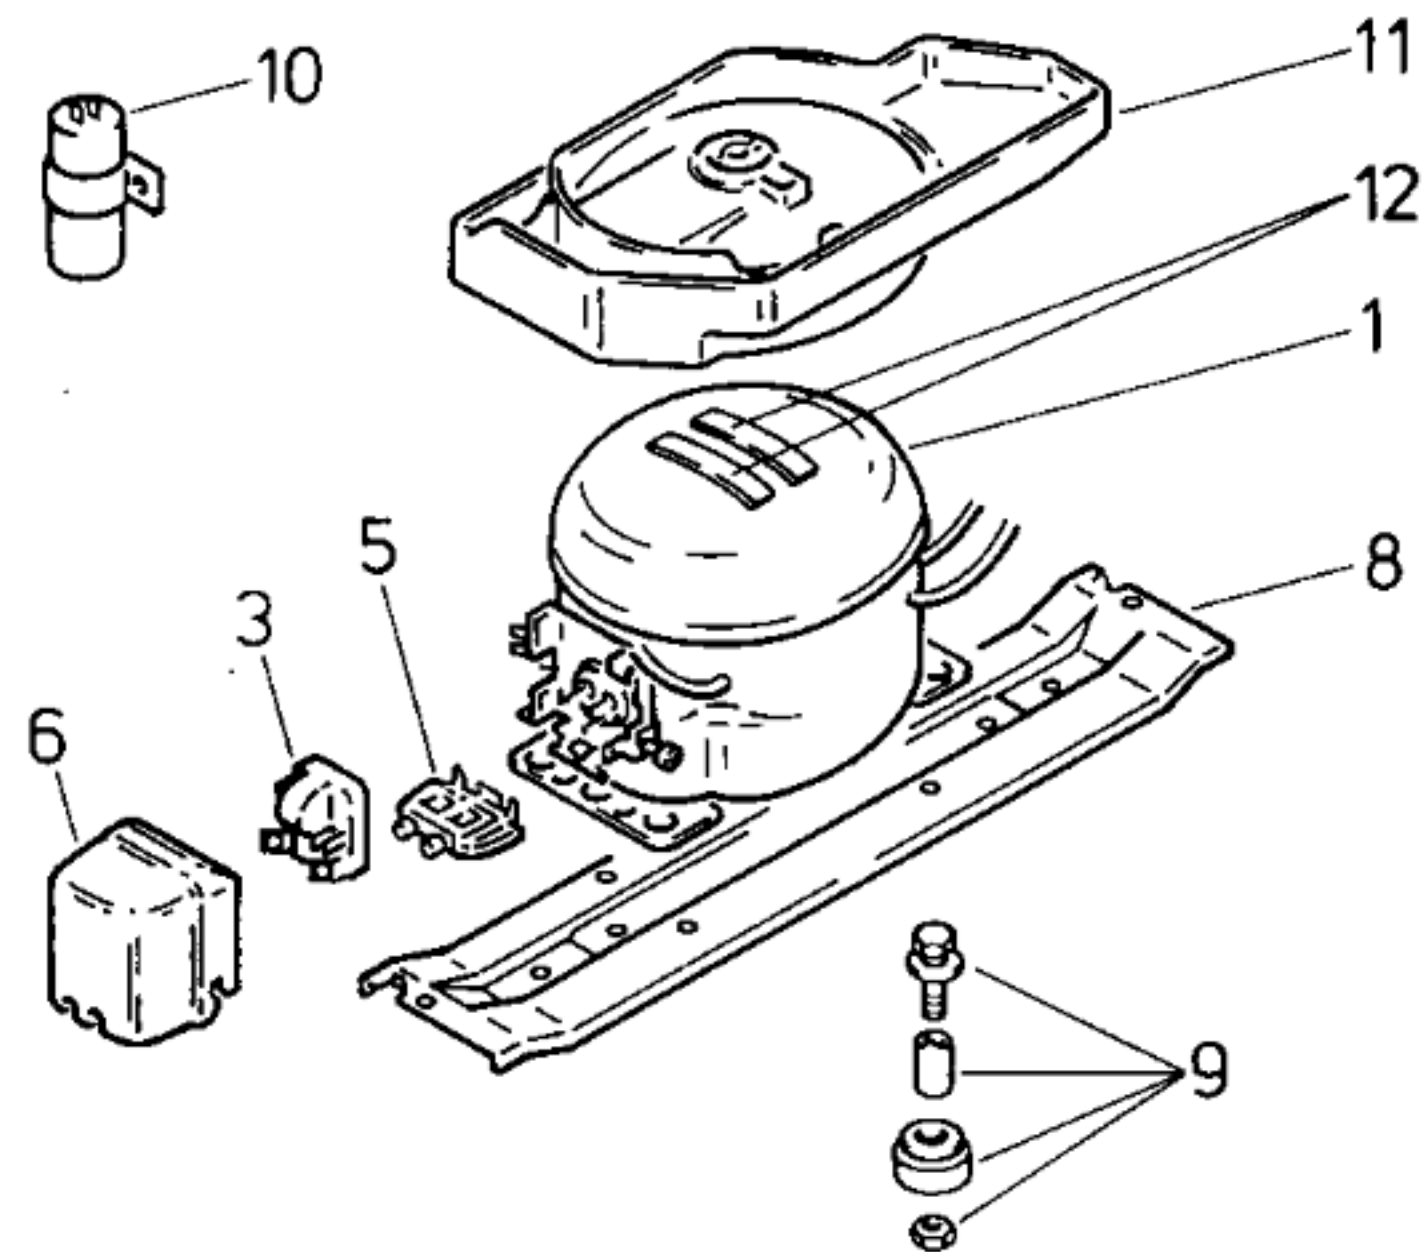

Pos.	EU1	EU2	
	Danfoss TL 4 A	Matsushita S075LKAA	
1	13 1064	14 0599	
2			
3	02 0108	03 2034	
4			
5	02 7310		
6	05 1413	05 8457	
7			
8	27 0291	27 0291	
9	05 0166	05 0166	
10			
11	08 4744	08 8893	
12	05 6008	05 6008	

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Danfoss		Matsushita		
Typ/Type		TL 4 A		S075LKAA		
Förderleistung/Delivery/Débit		l/h	695	641		
Anlaufstrom/Starting current/Cour. de démarrage		A	8,3	5,7		
Widerstand/Resistance/Résistance		Ha/main/prin.	23,4	24,4		
		Hi/aux	15,5	39,8		
Temp.-Regler/Thermostat		WHF				
Typ/Type		TF 57 F1				
Reglerstellung/Position		kalt		warm		
Schaltwerte/Switching values/ Valeurs de commutation		„ein“	+ 5,0	+ 5,0		
		„aus“ („abtauen“ od.)	- 27	- 12		
Füllmenge/Fill.quantity/Charge		R12	g	70		
Anschlußwert/Conn.load/Puiss. connectée		W	110			
Heizung/Heater/Chauffage						
Widerstand/Resistance/Résistance		Ω				
Leistung/Power/Puissance		W				
Ventilator/Blower/Ventilateur						
Widerstand/Resistance/Résistance		Ω				
Magnetventil/Magnetic valve/Electrovanne						
Widerstand/Resistance/Résistance		Ω				
Spannung/Voltage/Tension		V				