


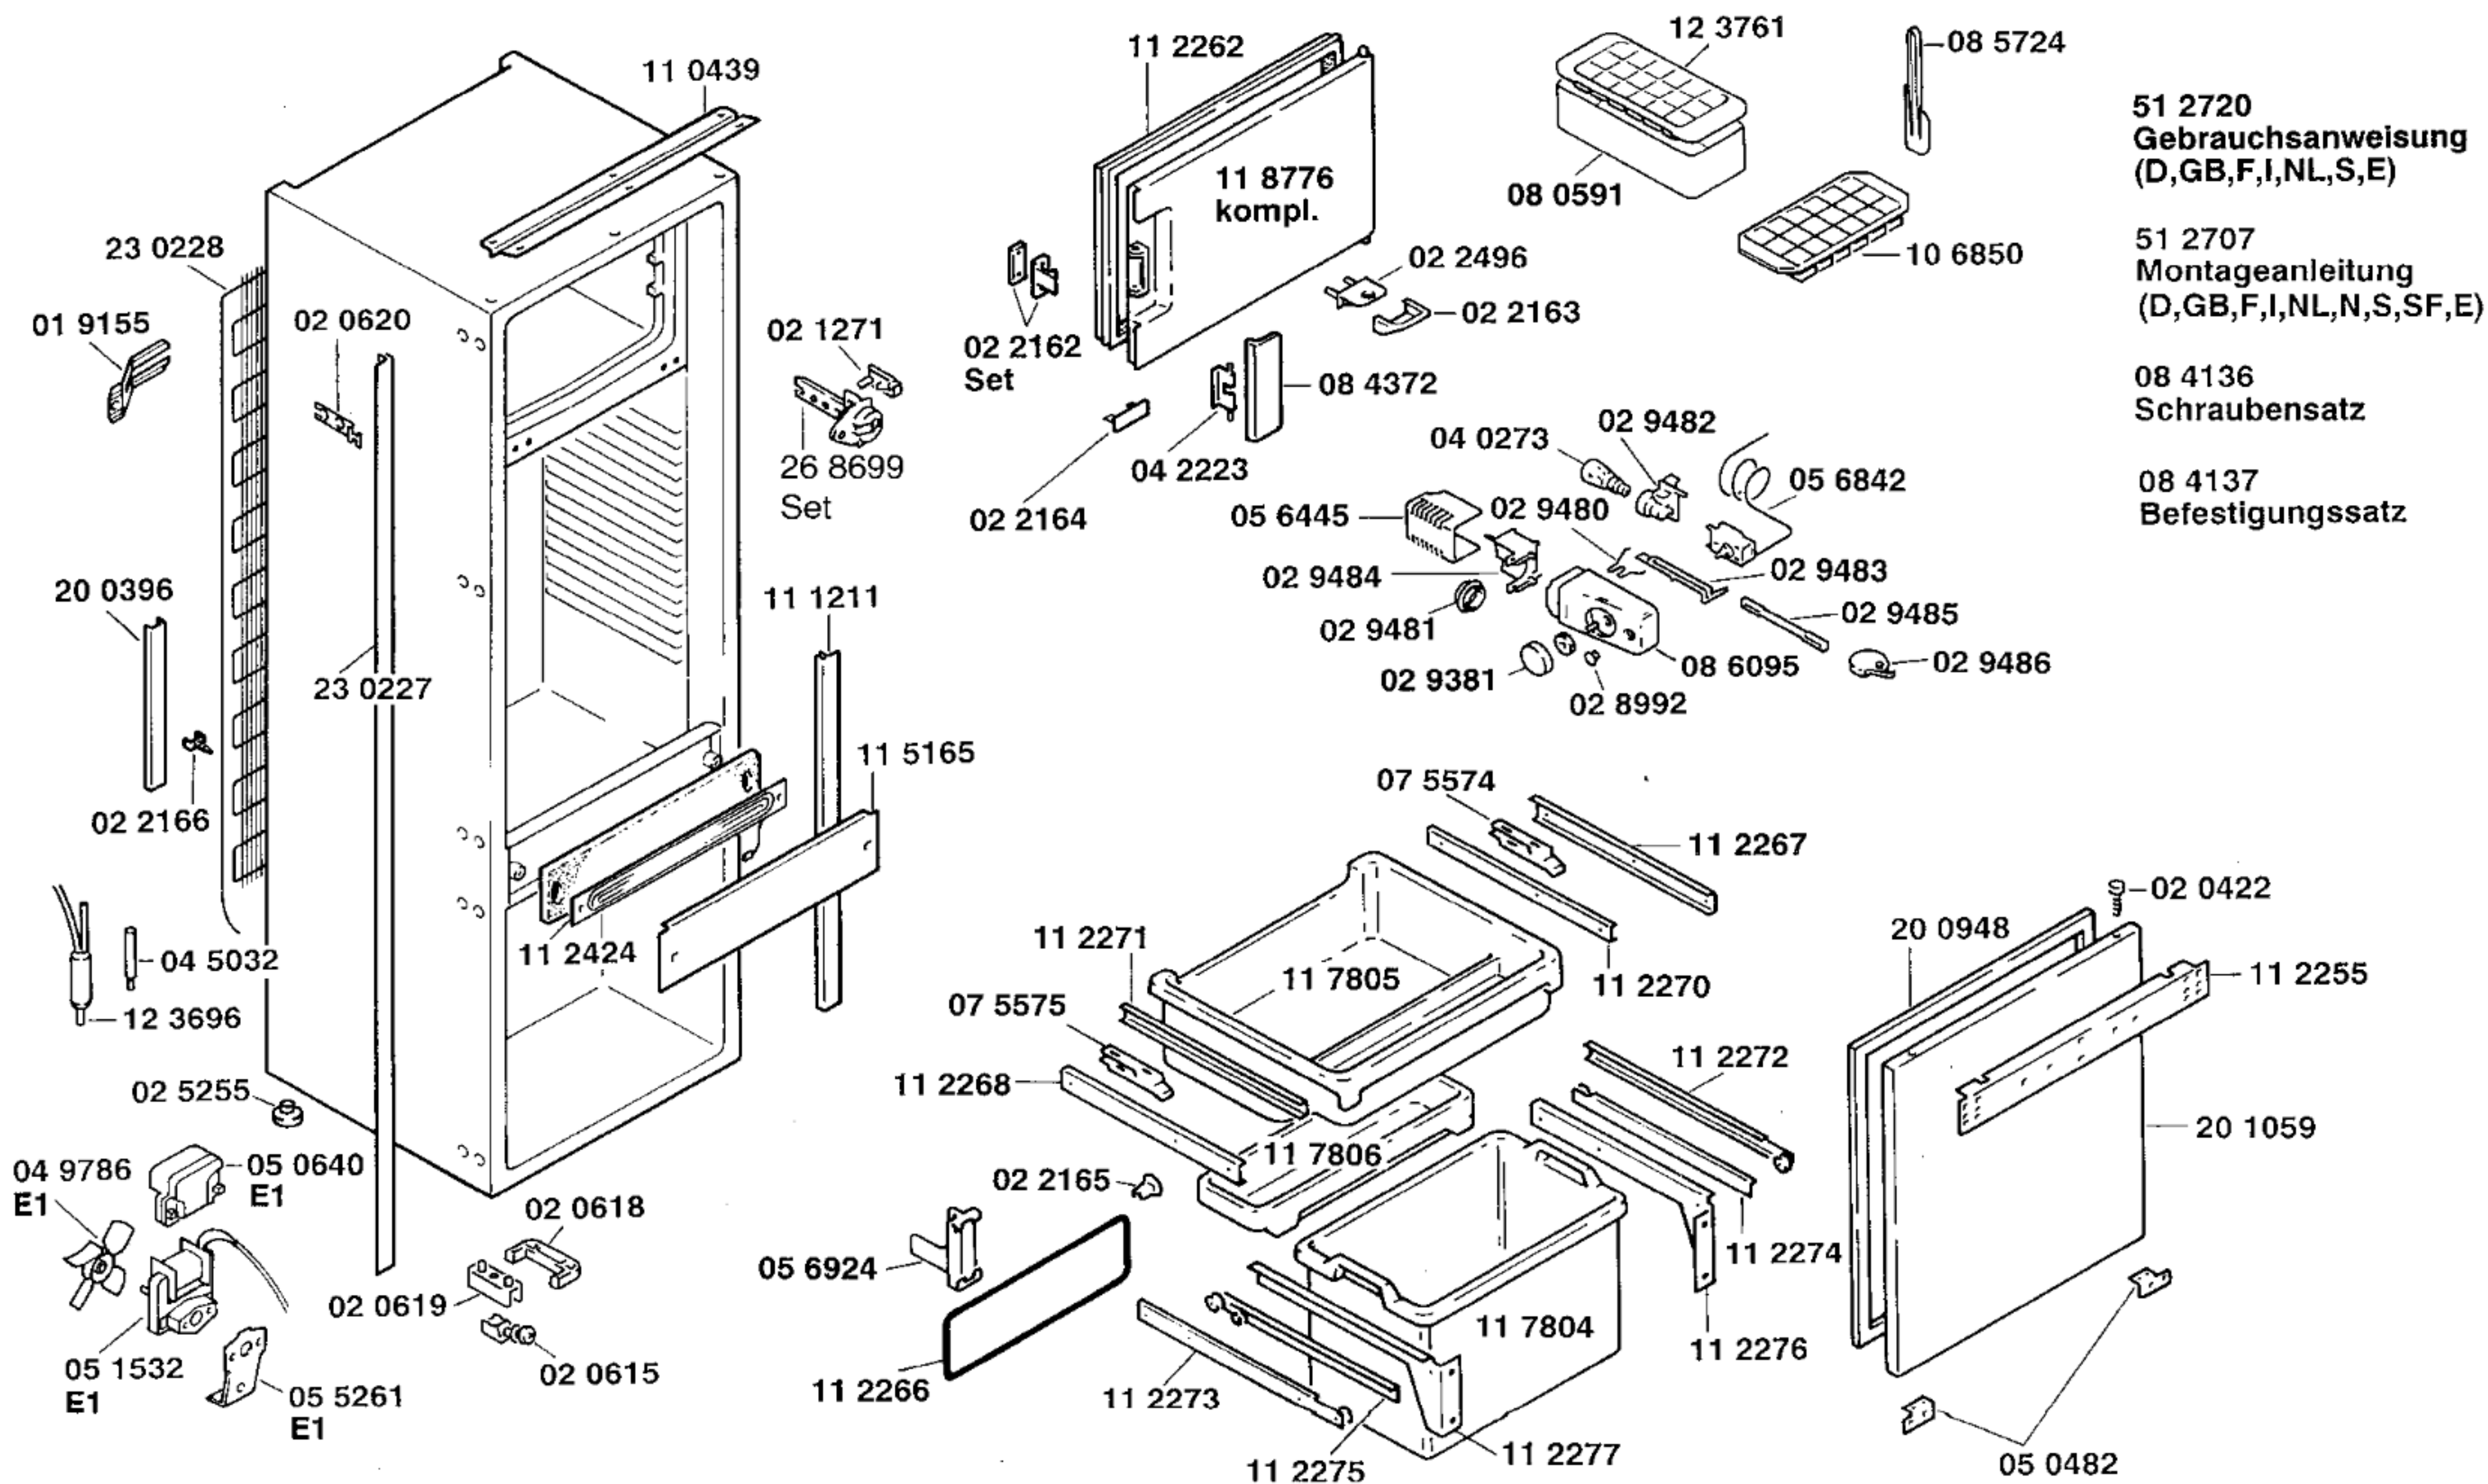


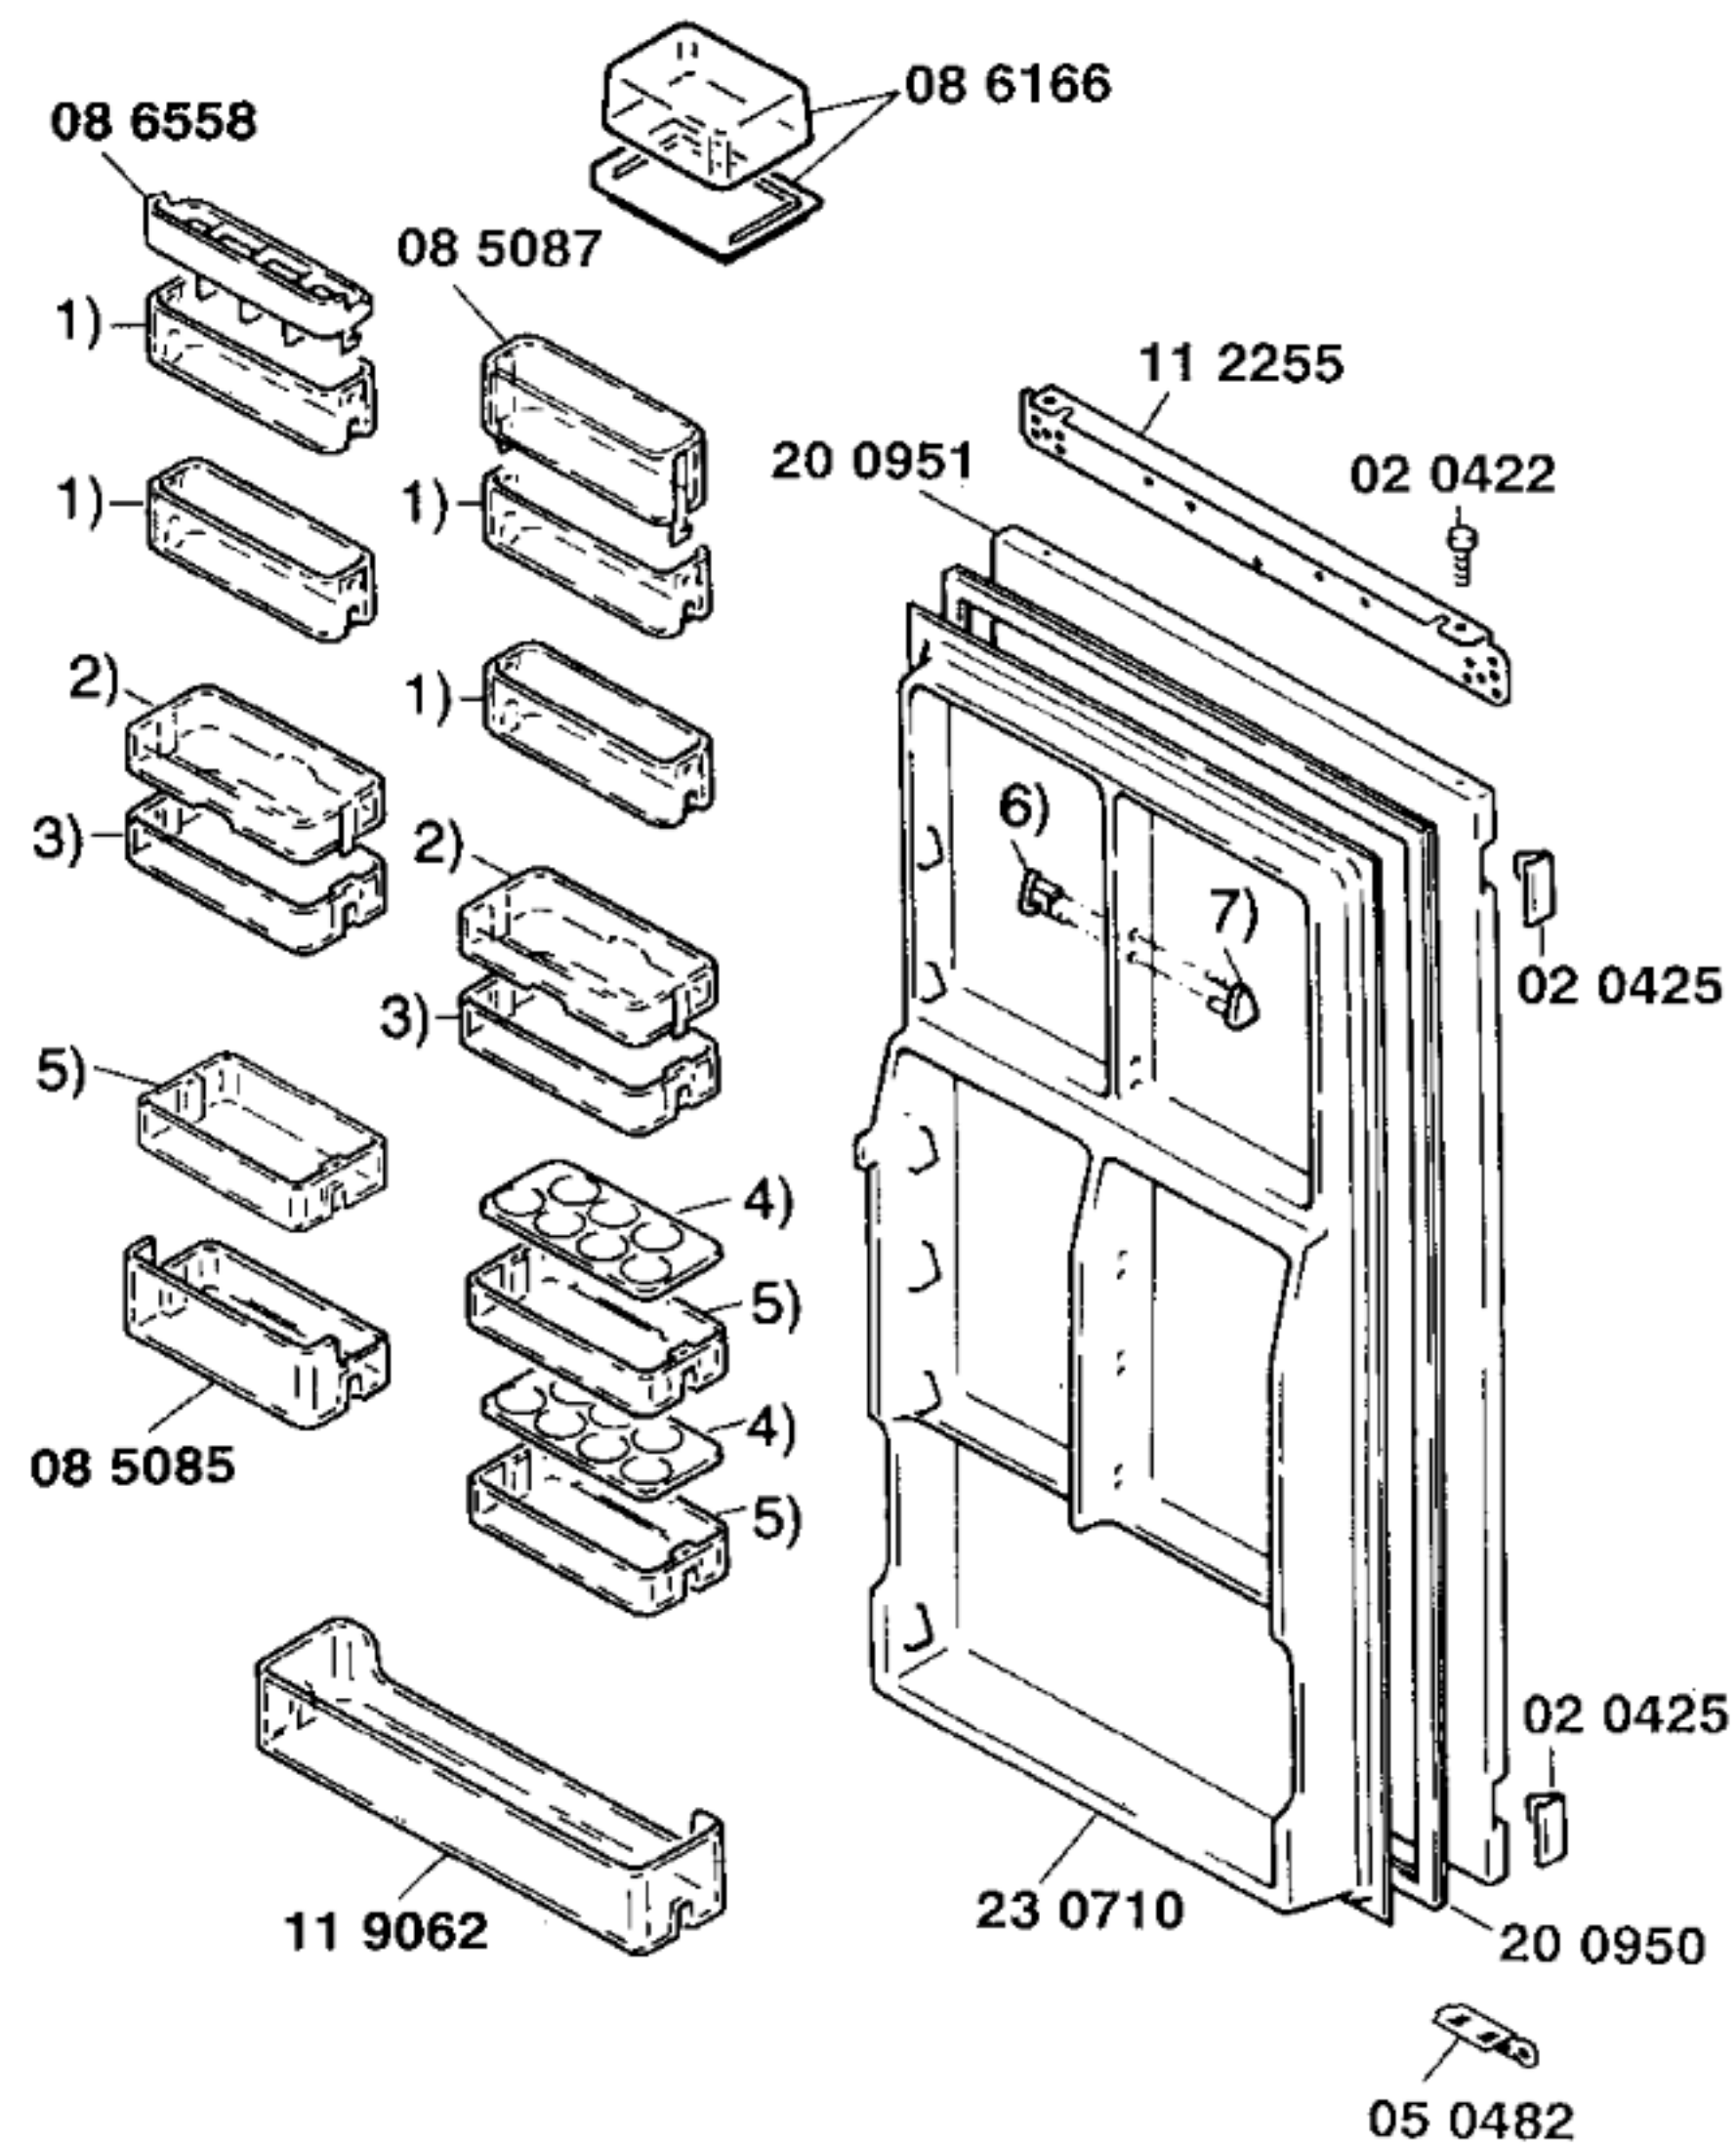

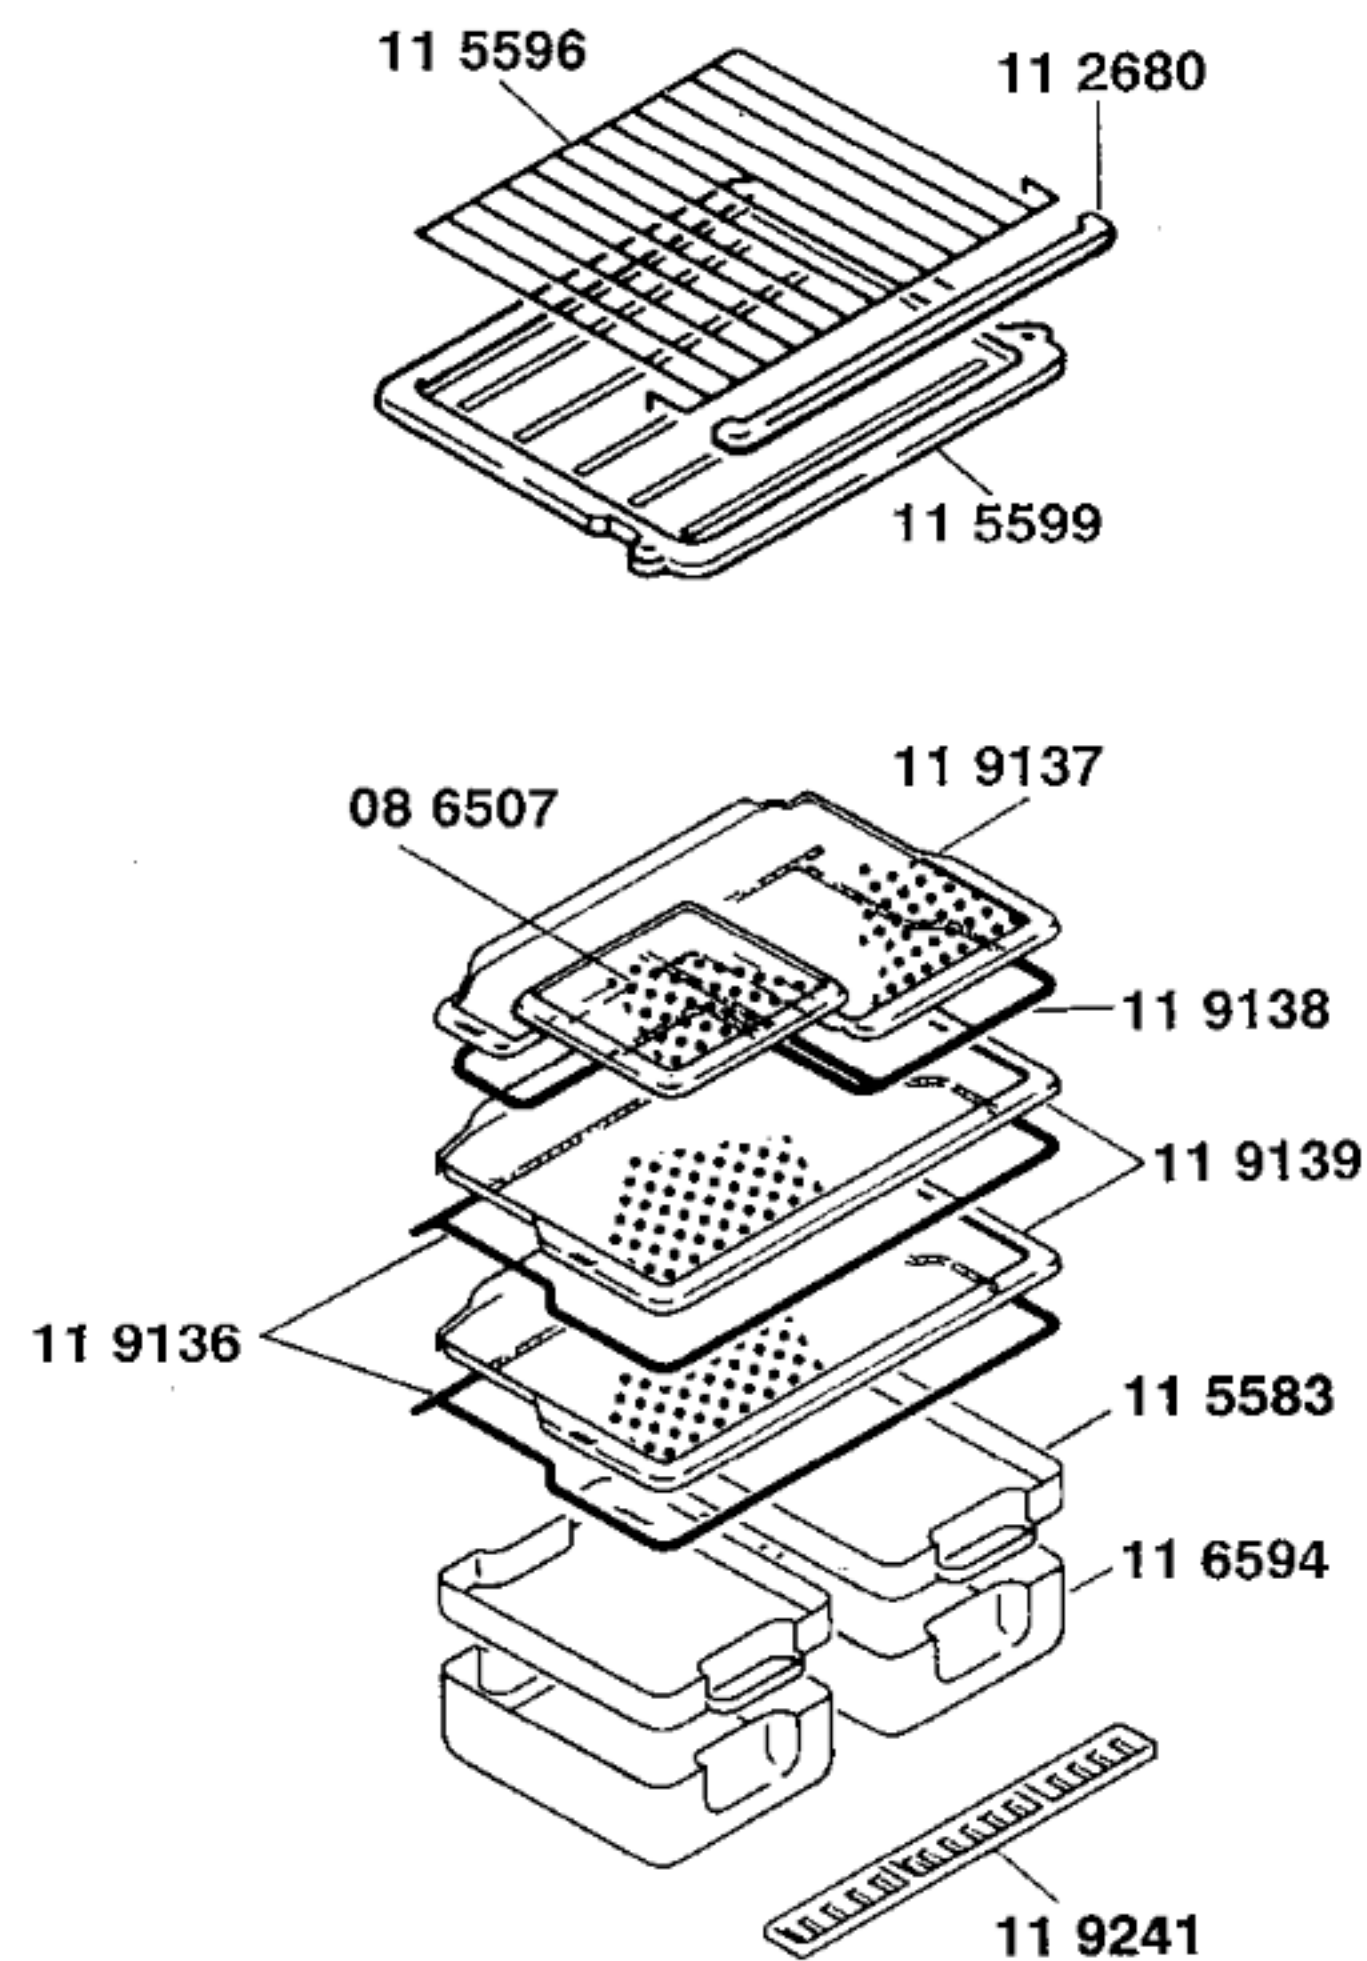

- 1) 08 5089
- 2) 08 5086
- 3) 08 5084
- 4) 08 4592
- 5) 08 5084
- 6) 02 2437
- 7) 02 6566

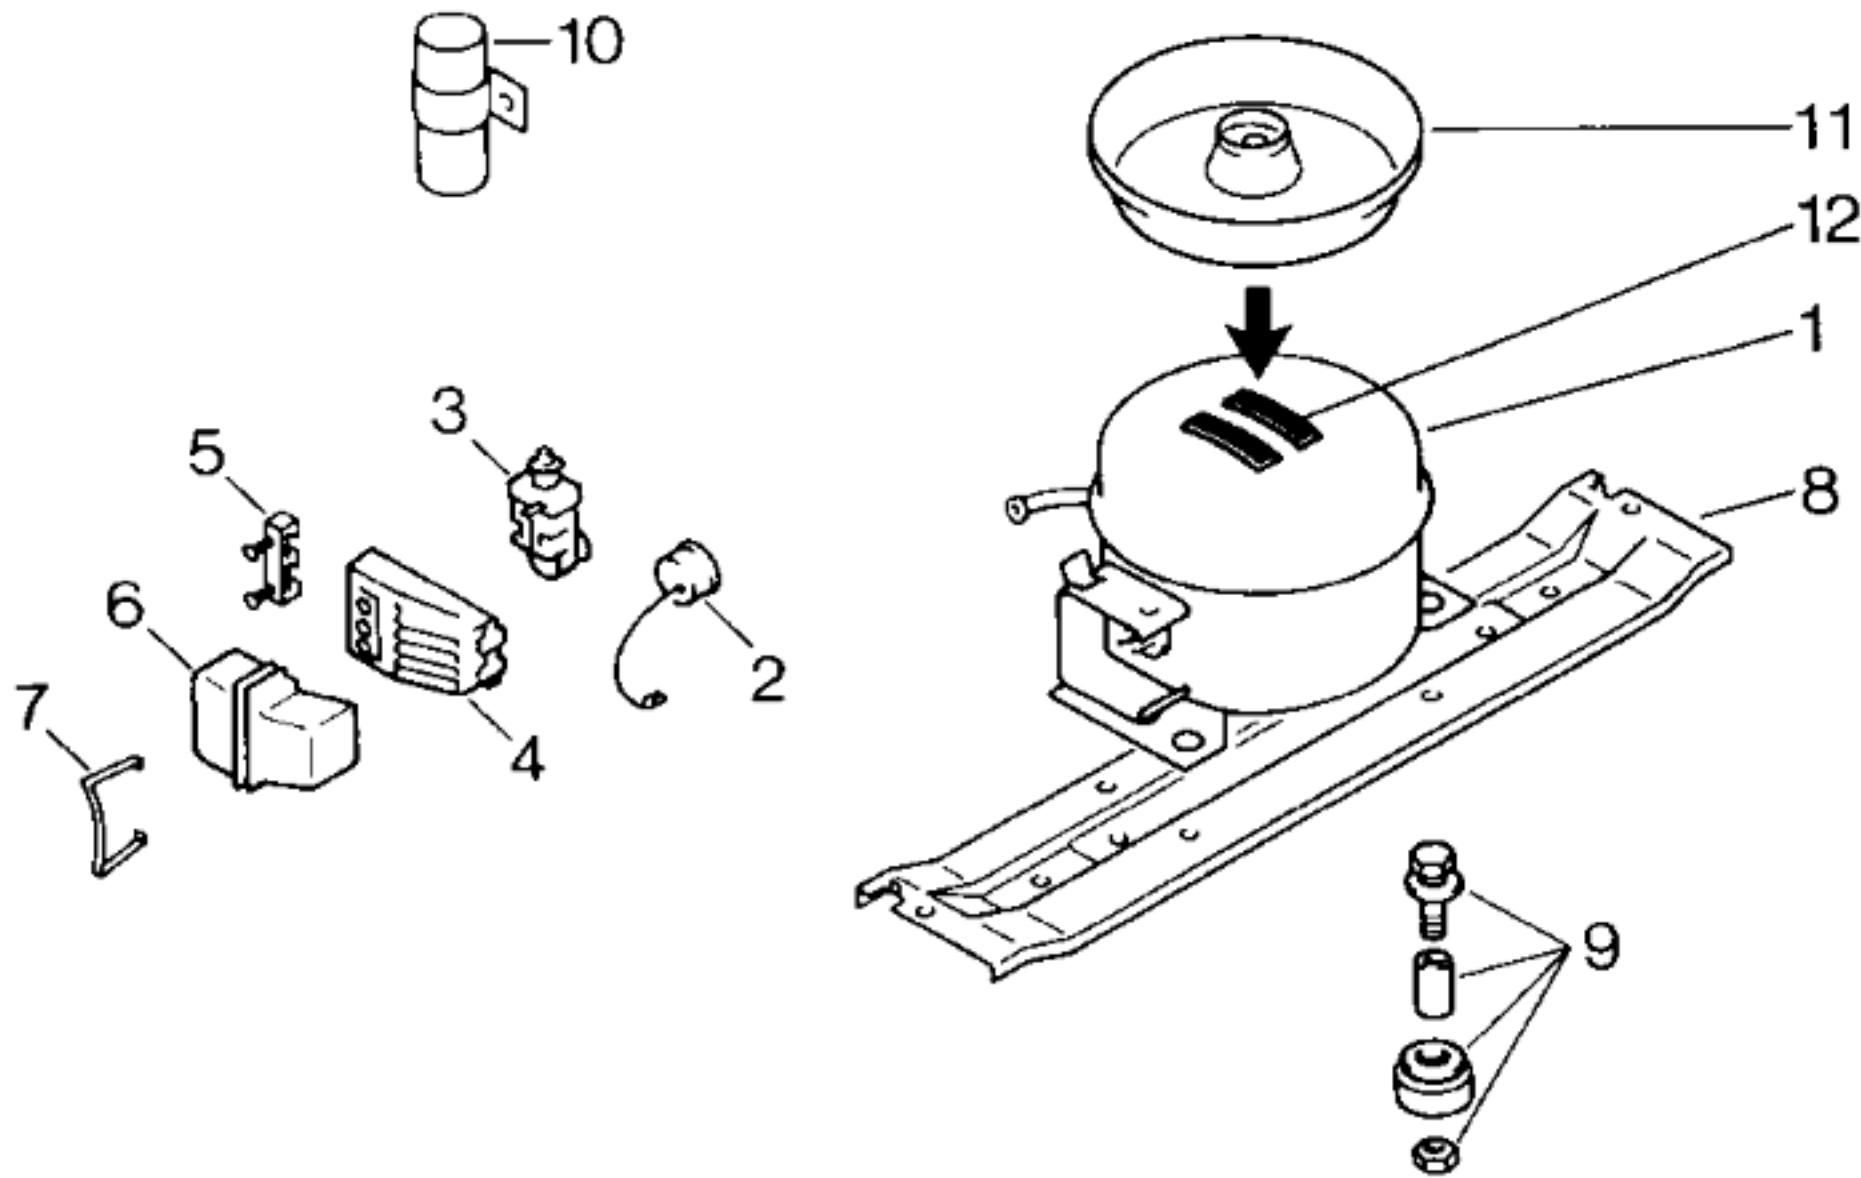

Pos.	EU1,CH1,F1,E1		
	Aspera BY 1116 A		
1	14 0405		
2	02 6559		
3	02 2342		
4	05 1748		
5			
6	05 1746		
7	02 2339		
8	11 1838		
9	05 0166		
10			
11	08 5091		
12	05 6008		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Aspera		
Typ/Type		BY 1116 A		
Förderleistung/Delivery/Débit		l/h	1450	
Anlaufstrom/Starting current/Cour. de démarrage		A	9,9	
Widerstand/Resistance/Résistance		Ha/main/prin.	Ω	11,7
		Hi/aux	Ω	37,7
Temp.-Regler/Thermostat		Ranco		
Typ/Type		K 59		
Reglerstellung/Position		kalt	+ 4,5	warm
Schaltwerte/Switching values/		„ein“	°C	+ 4,5
Valeurs de commutation		„aus“		- 31,0
		(„abtauen“ od.)		- 13,5
Füllmenge/Fill.quantity/Charge		R12	g	180
Anschlußwert/Conn.load/Puiss. connectée			W	150
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance			Ω	8800
Leistung/Power/Puissance			W	5,5
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance			Ω	430 ± 10%
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance			Ω	
Spannung/Voltage/Tension			V	