




07 4445

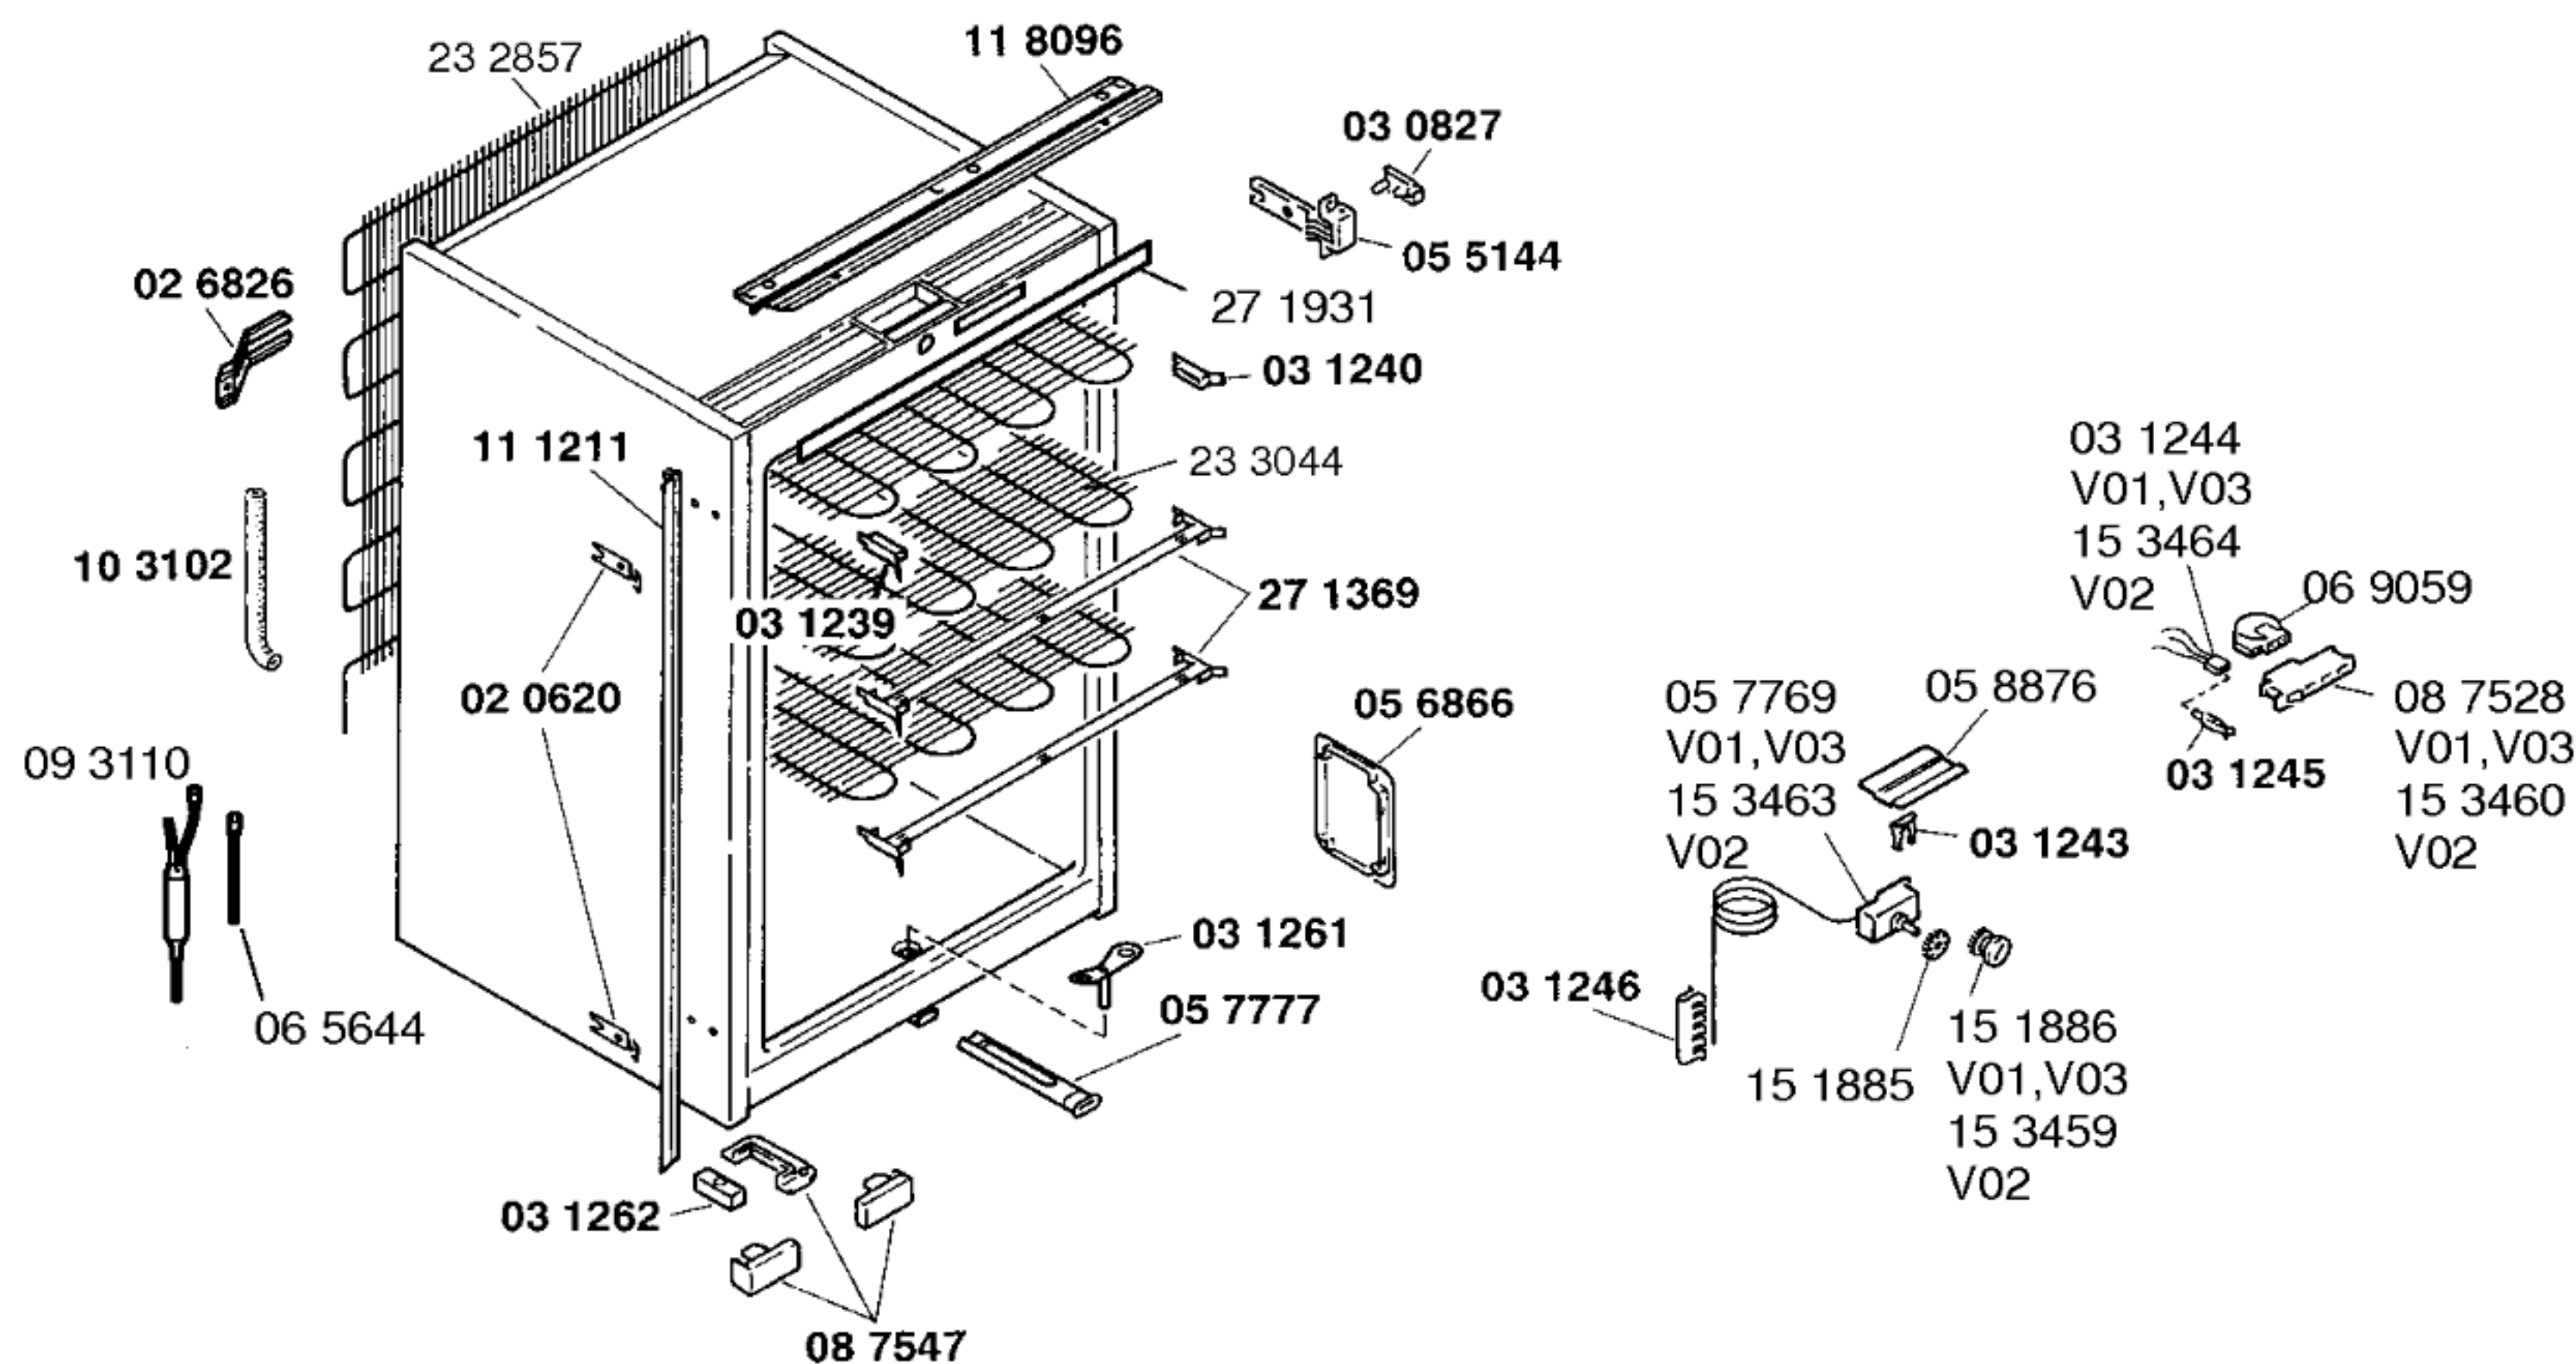

Gebrauchsanweisung

51 4222

(D,GB,F,I,NL,N,S,SF)

Montageanleitung

51 4221

(D,GB,F,I,NL,DK,N,SF,E,S)

Schraubensatz

08 4136

Zubehör:

Dekorrahmen

GZ10040,weiß

GZ10050,braun

Ausgleichsblenden

braun:

KZ12080, 37mm

KZ12090, 41mm



KZ12100, 56mm


Alu:

KZ12110, 37mm

KZ12120, 41mm

KZ12130, 56mm

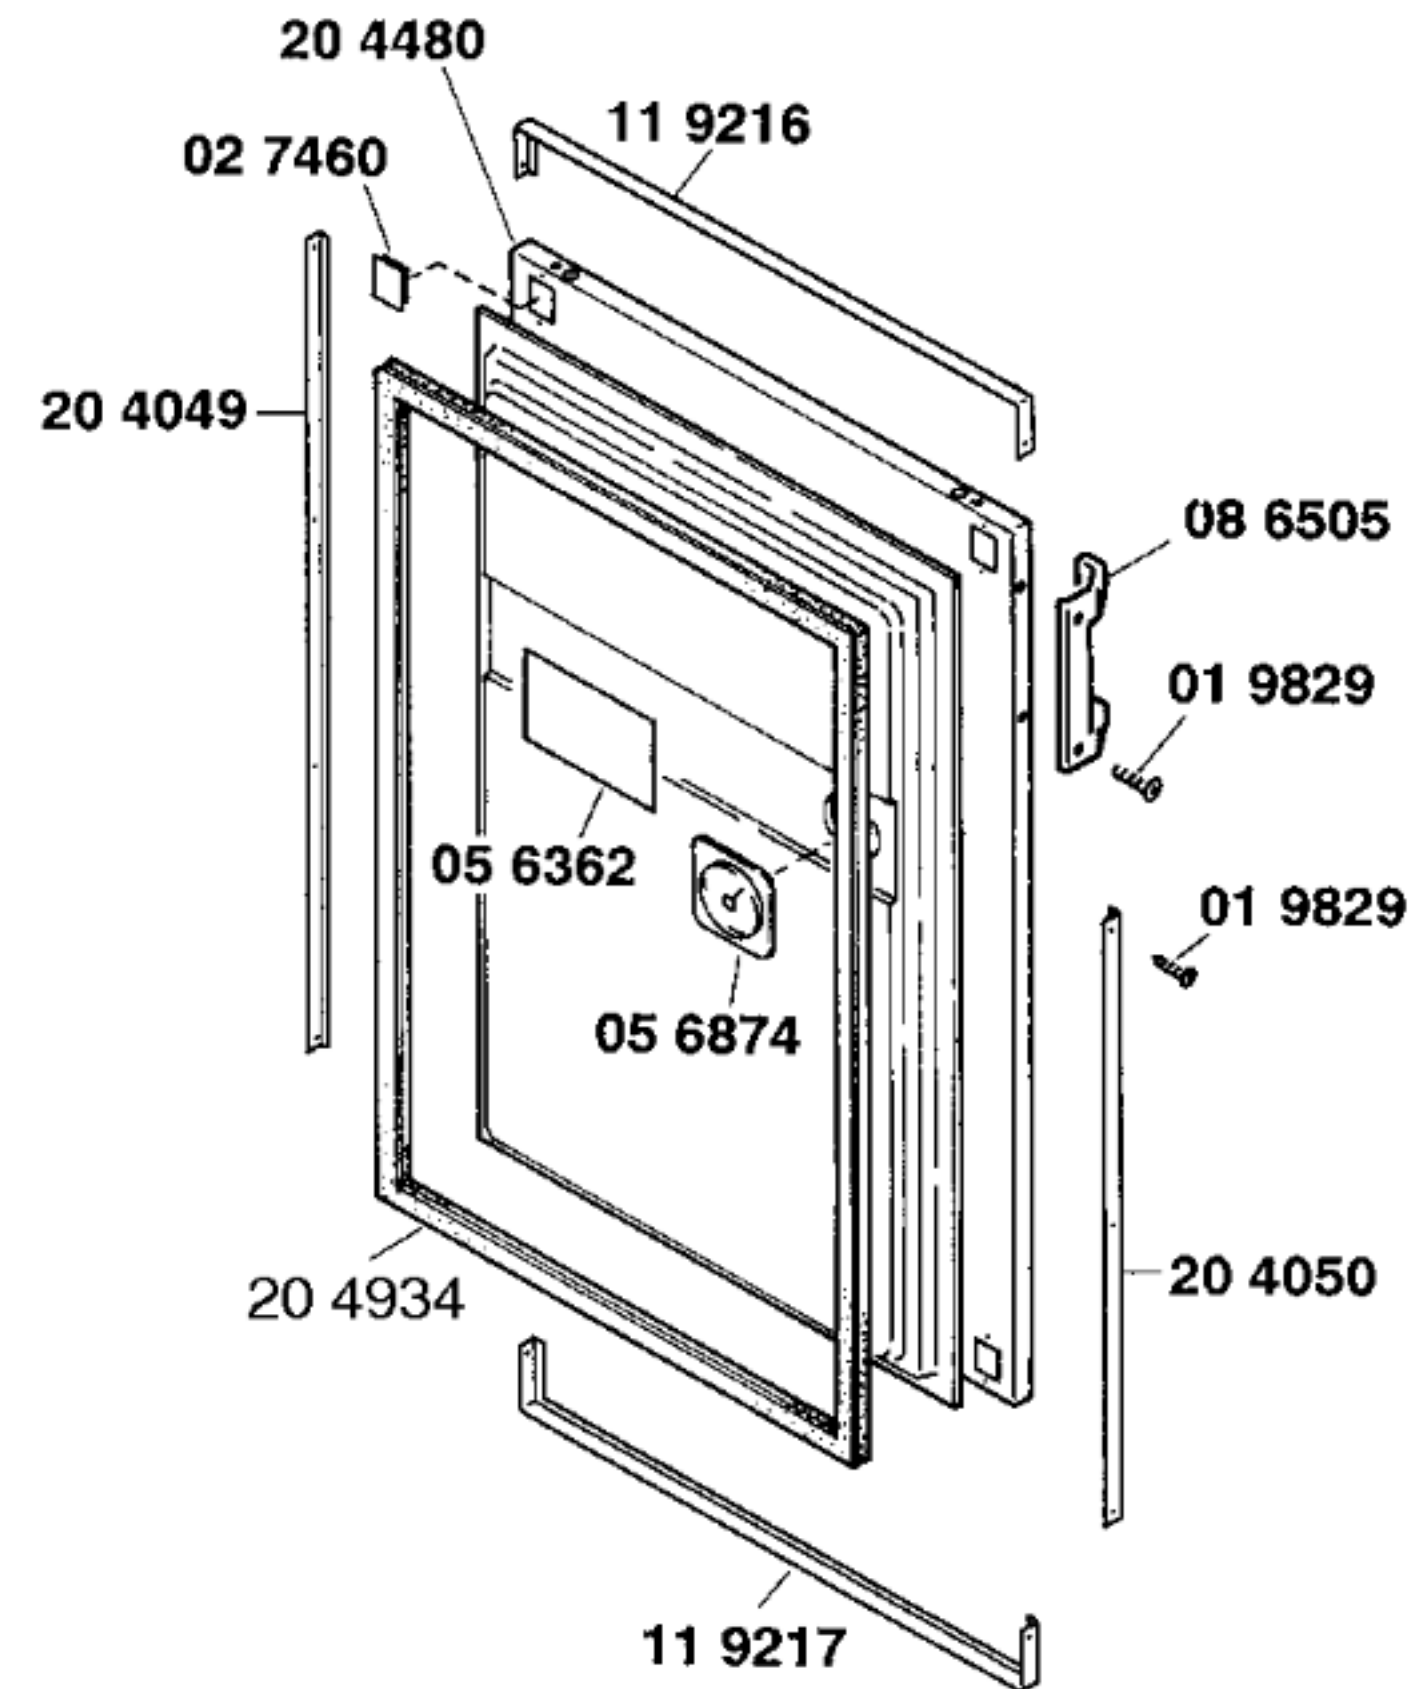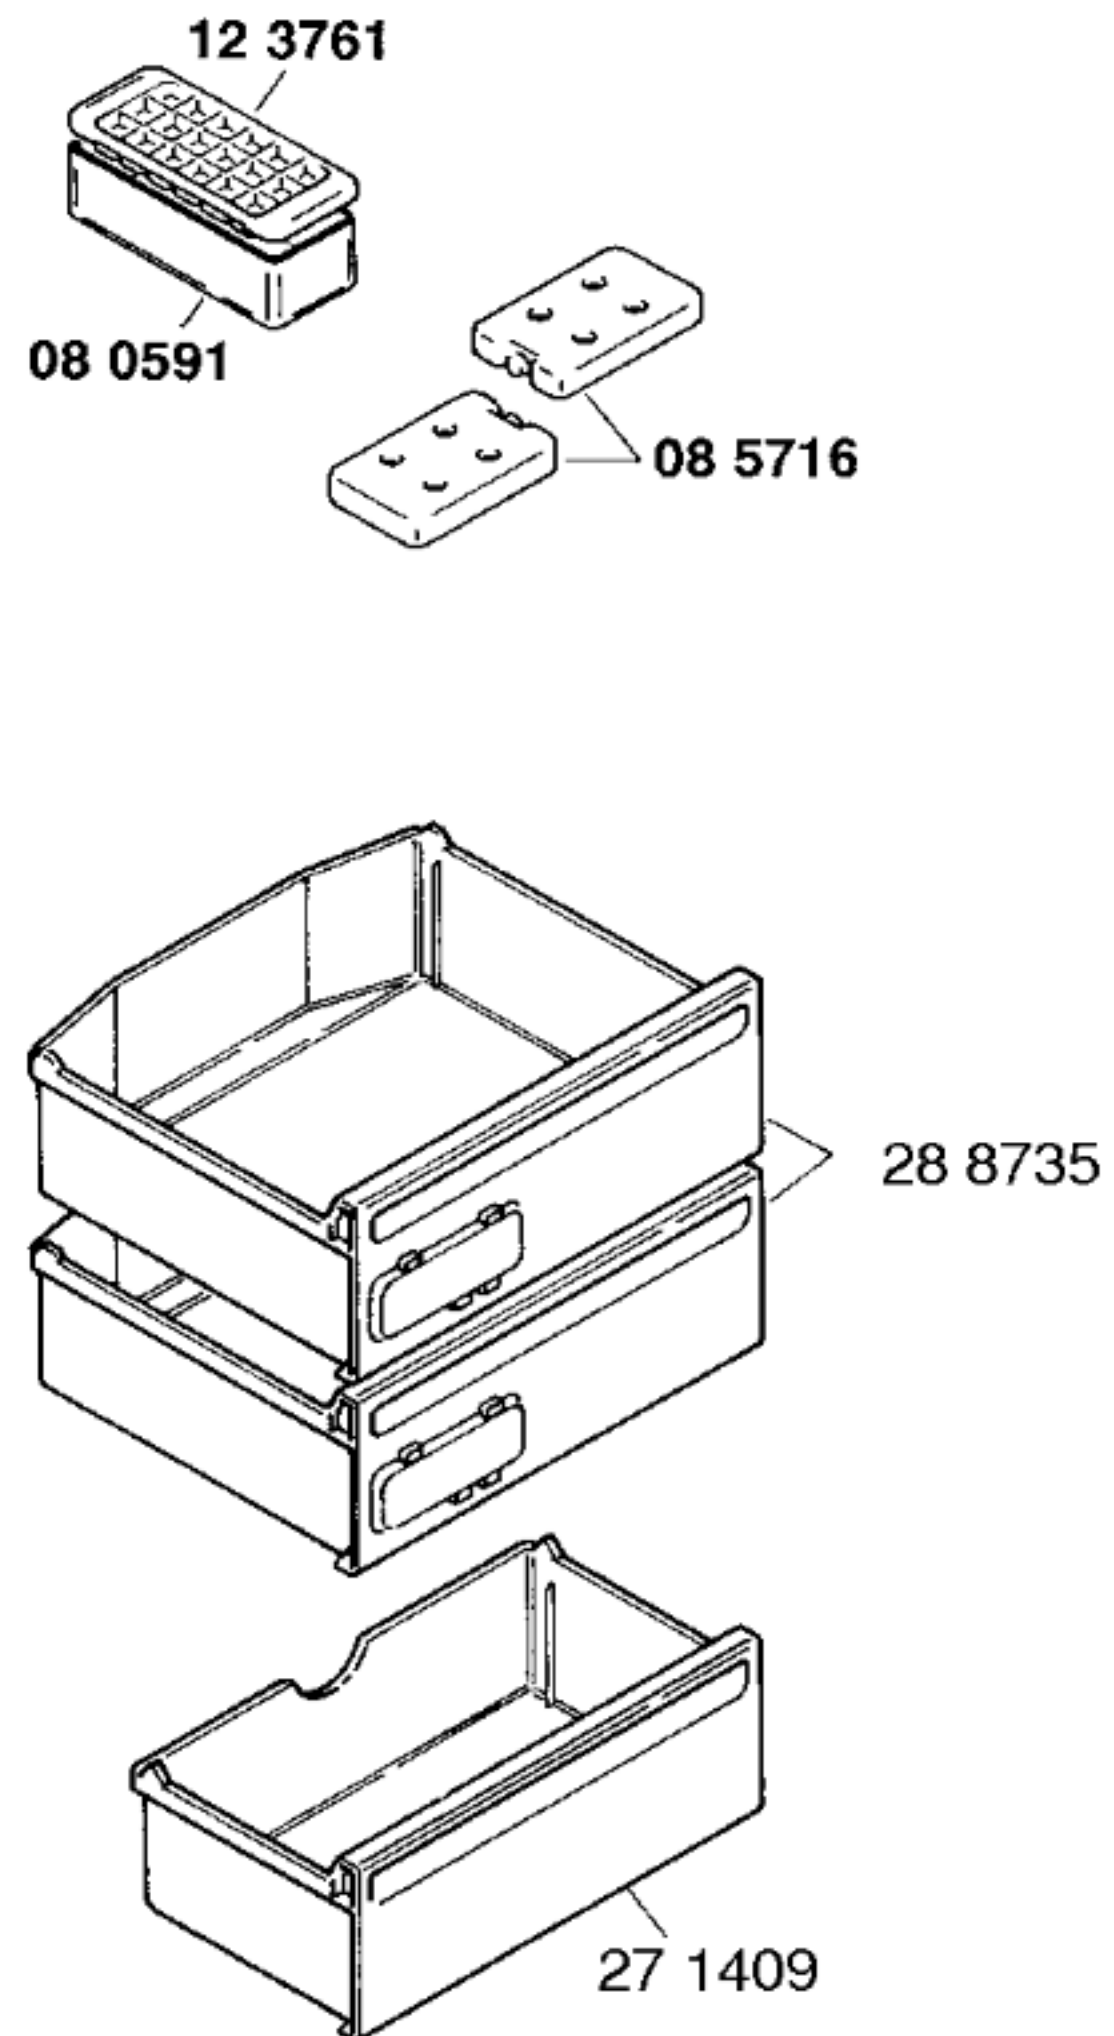

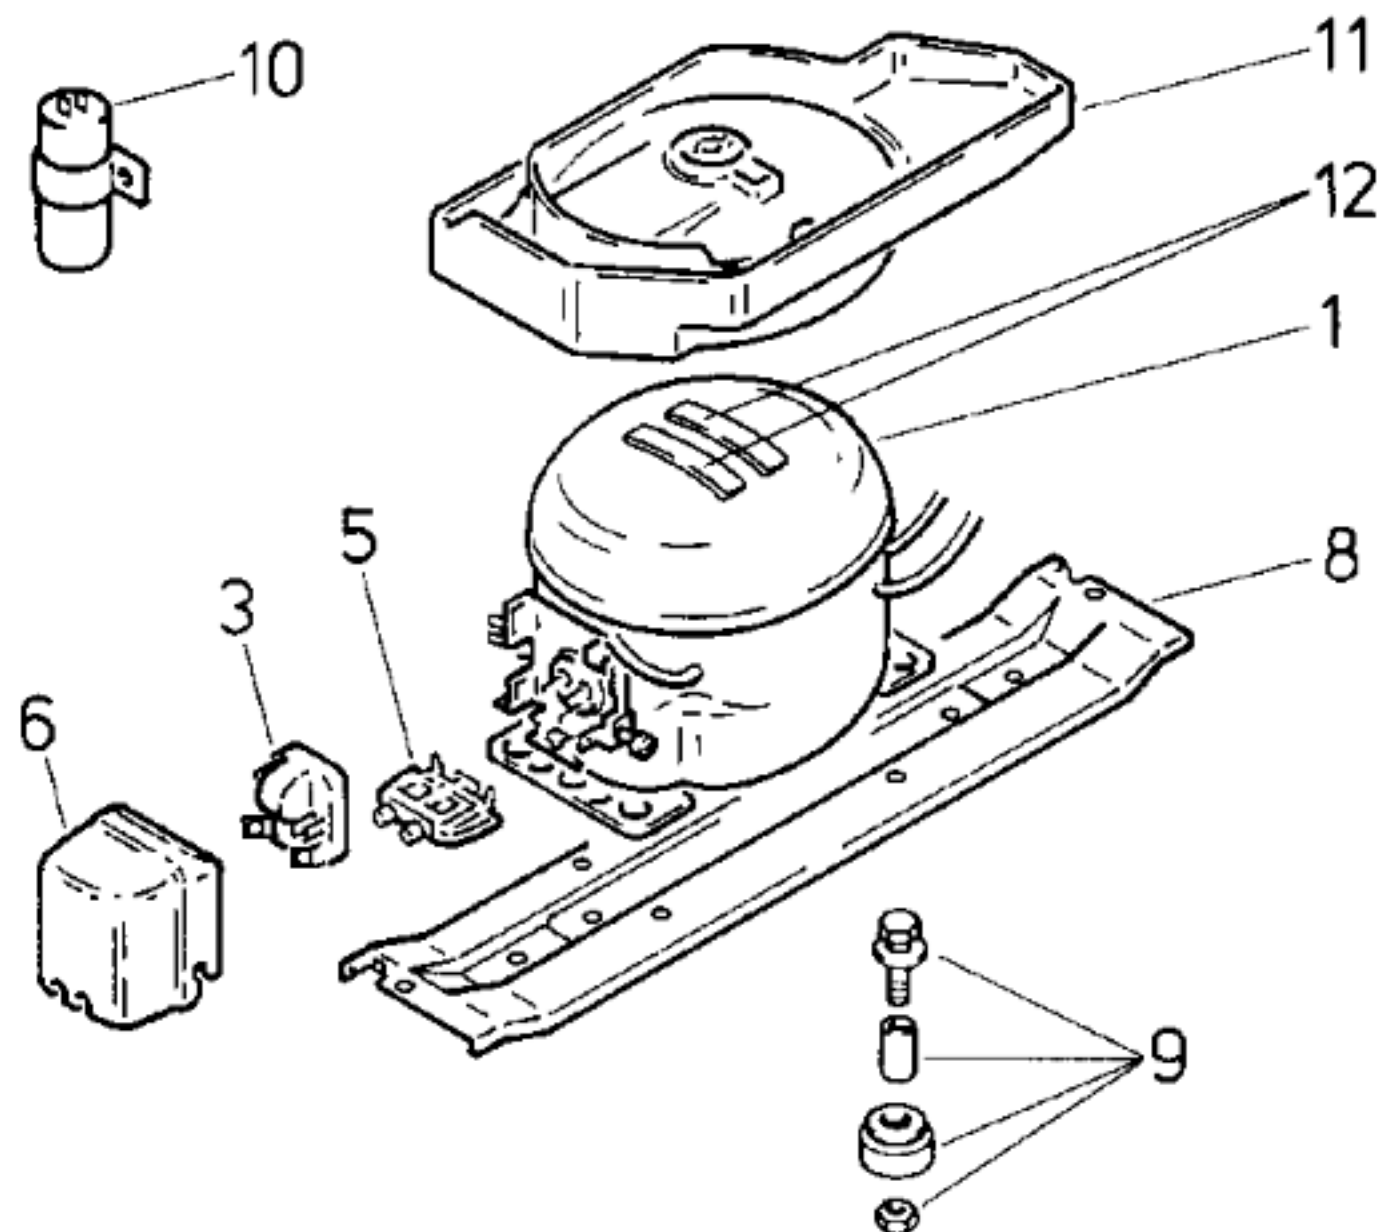

Pos.			
	Danfoss		
	TLES 7 K		
1	14 1239		
2			
3	15 1055		
4			
5	15 0760		
6	15 1072		
7			
8	27 1375		
9	05 0166		
10			
11			
12			

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Danfoss		
Typ/Type		TLES 7 K		
Förderleistung/Delivery/Débit		I/h	1168	
Anlaufstrom/Starting current/Cour de démarrage		A	4,5	
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	16,5	
		Hi/aux Ω	16,9	
Temp.-Regler/Thermostat		WHF		
Typ/Type		TF 57 SF2		
Reglerstellung/Position		kalt	warm	
Schaltwerte/Switching values/		„ein“	„aus“	
Valeurs de commutation		„abtauen“ od.)	„alarm“	
		$^{\circ}\text{C}$		
		-25	-17	
		-33	-23	
		-19,5	-13	
Füllmenge/Fill.quantity/Charge		R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée		W	79	
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance		Ω		
Schaltuhr/Timer/Minuterie de contact				
Widerstand/Resistance/Résistance		Ω		
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		

* siehe Typenschild