



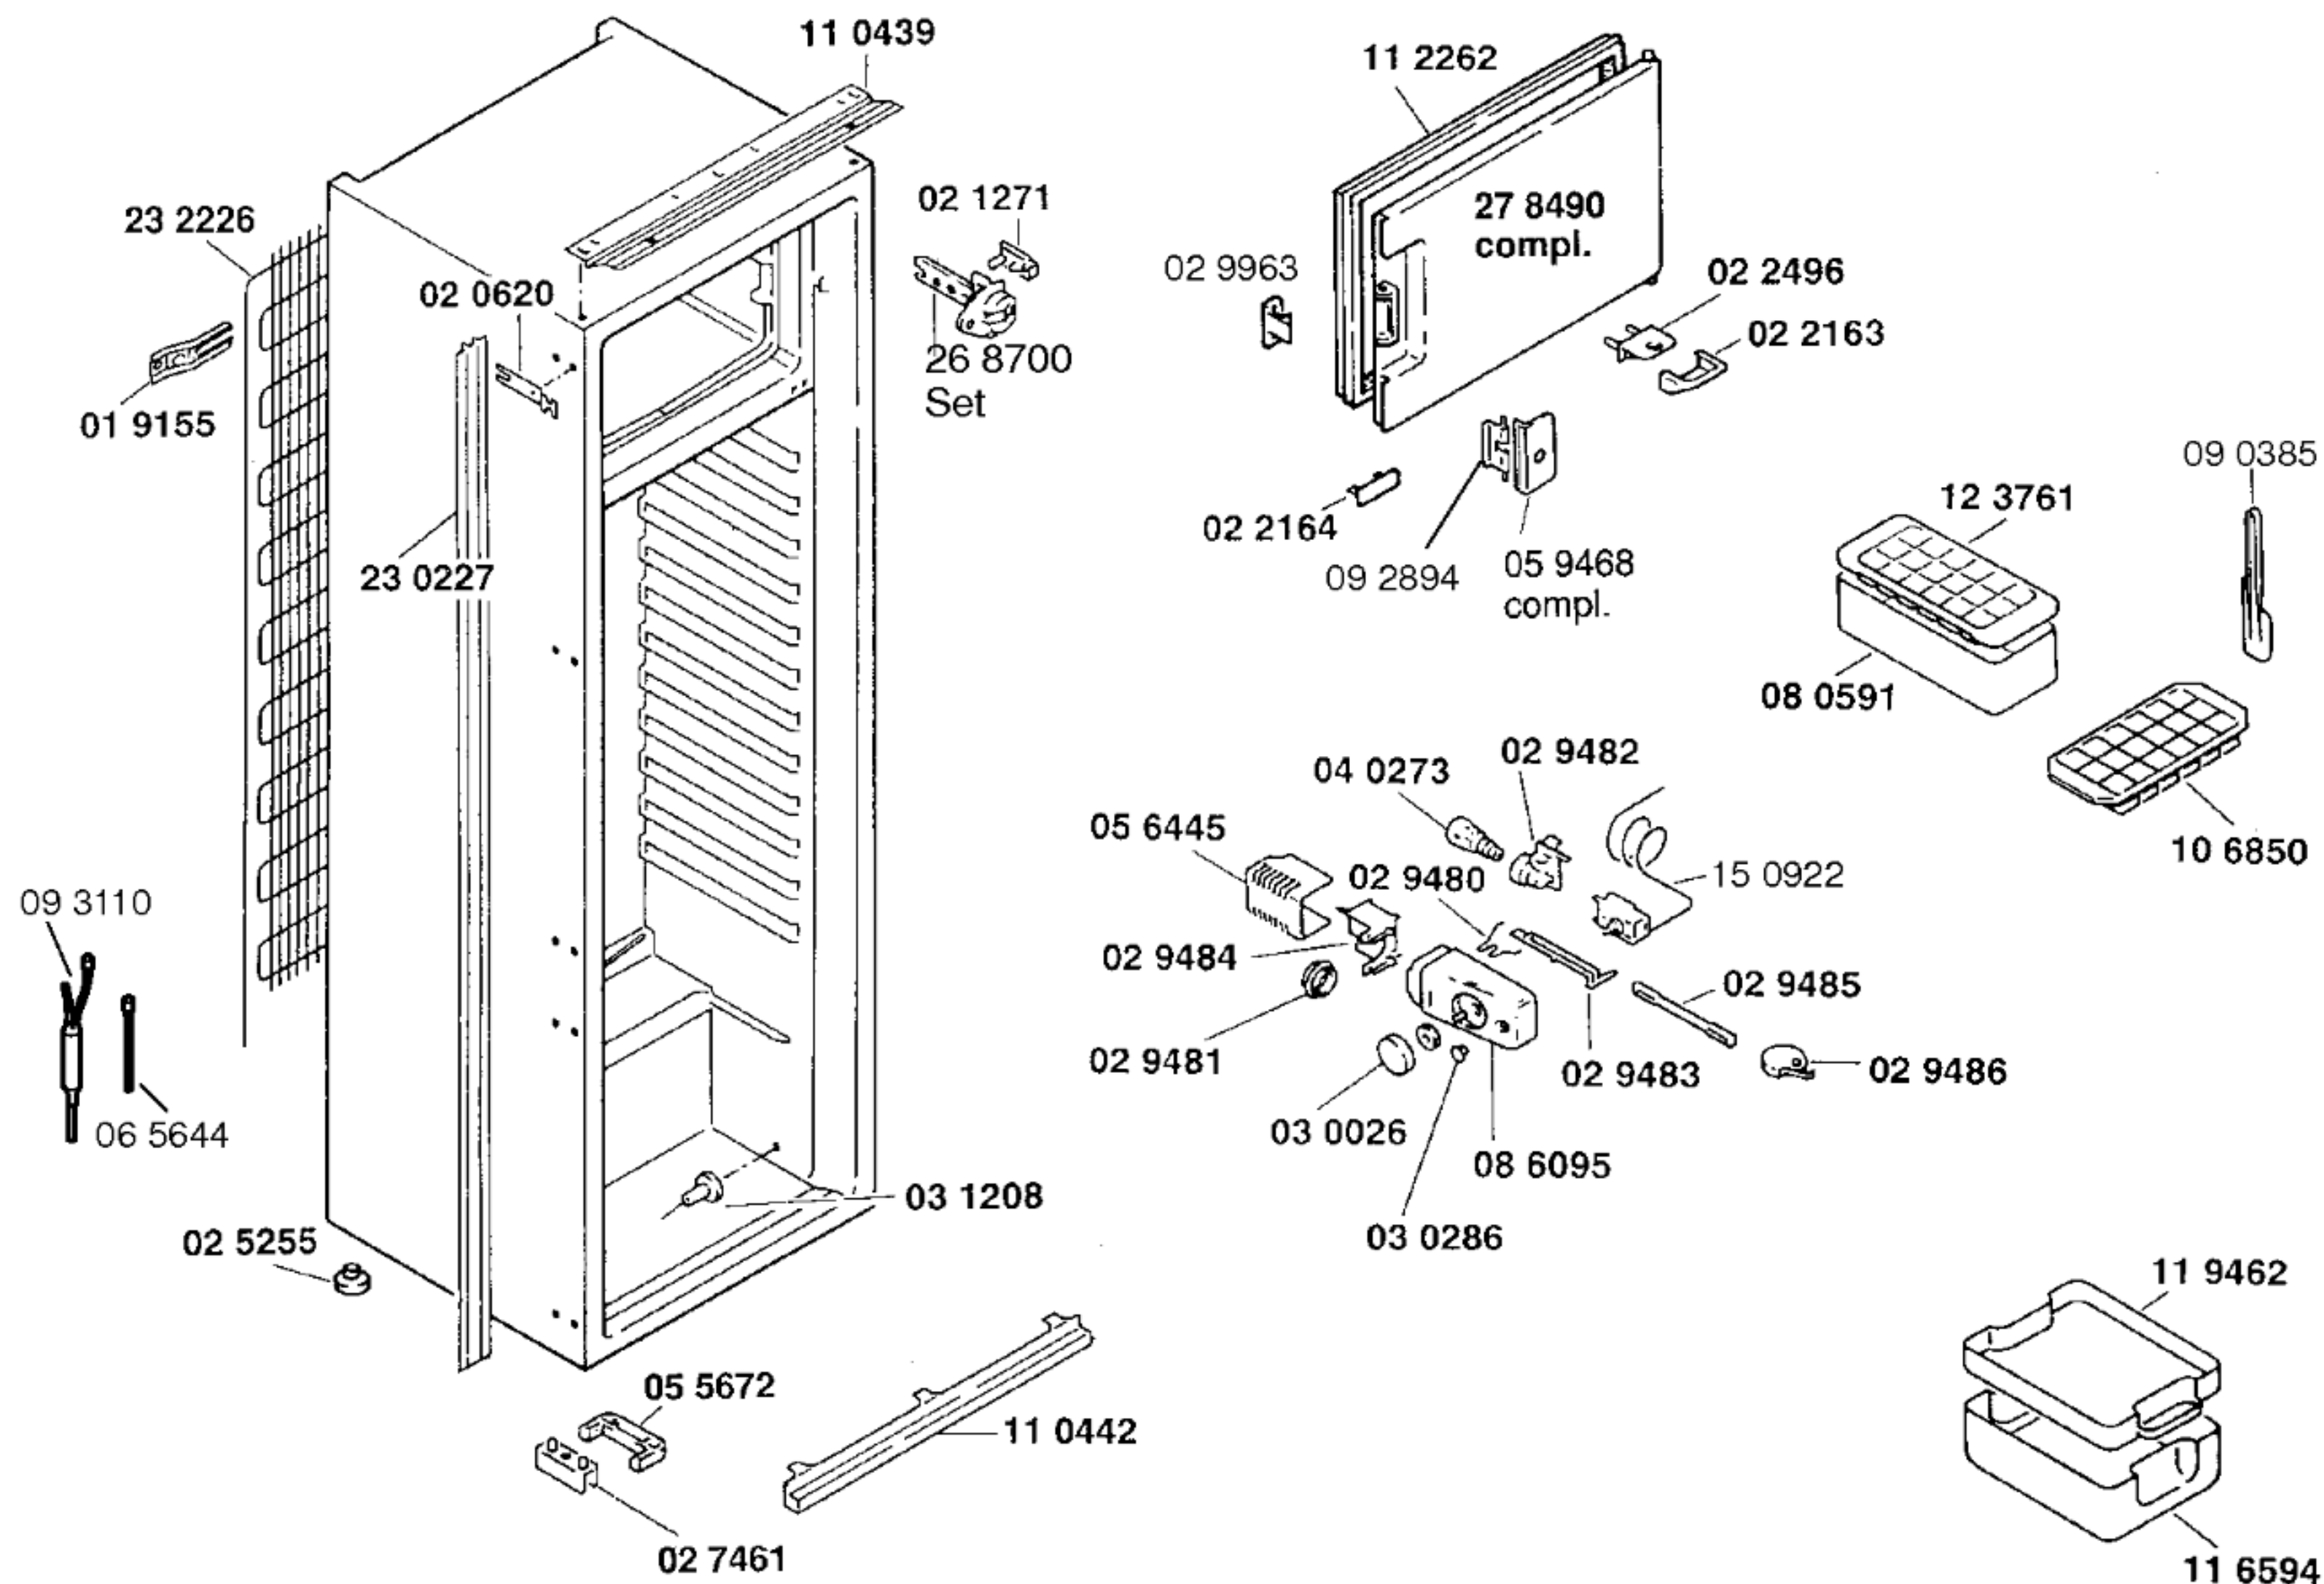


Gebrauchsanweisung
51 4430
(D,GB,F,I,NL,E)
Montageanweisung
51 5436
(D,GB,F,I,NL,N,S,E)

Schraubensatz
08 4136

Befestigungssatz
08 8957

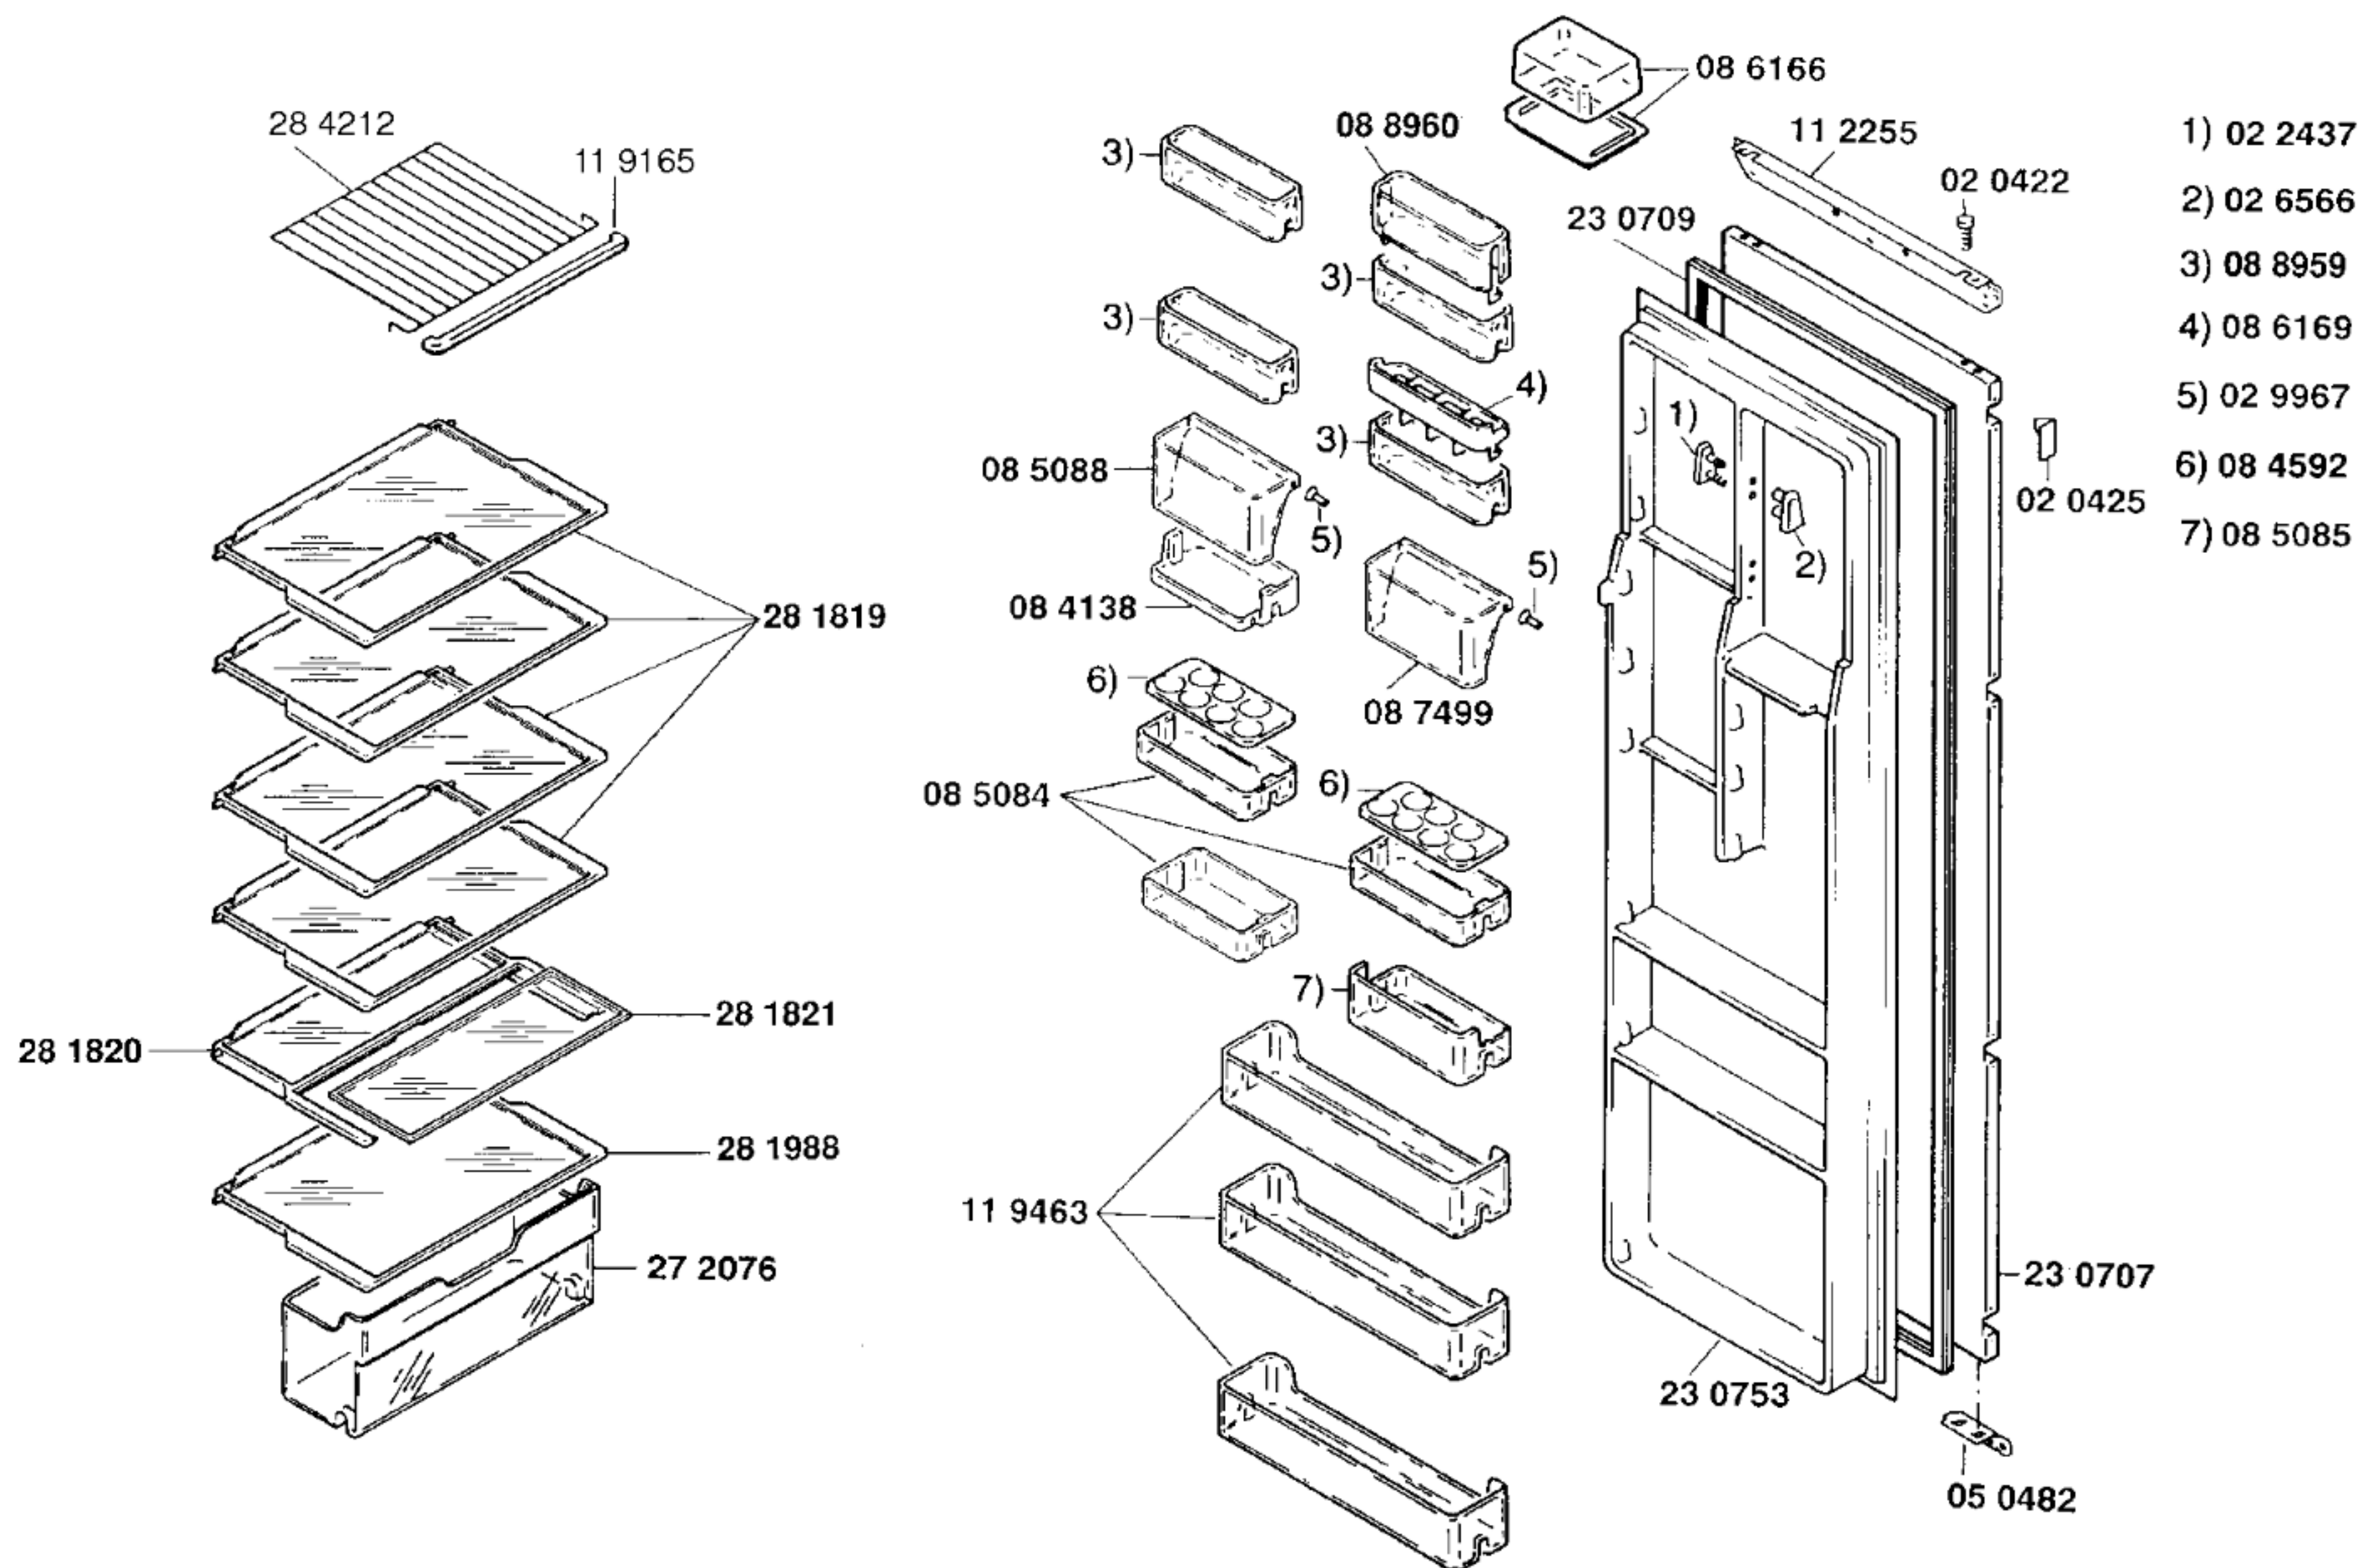

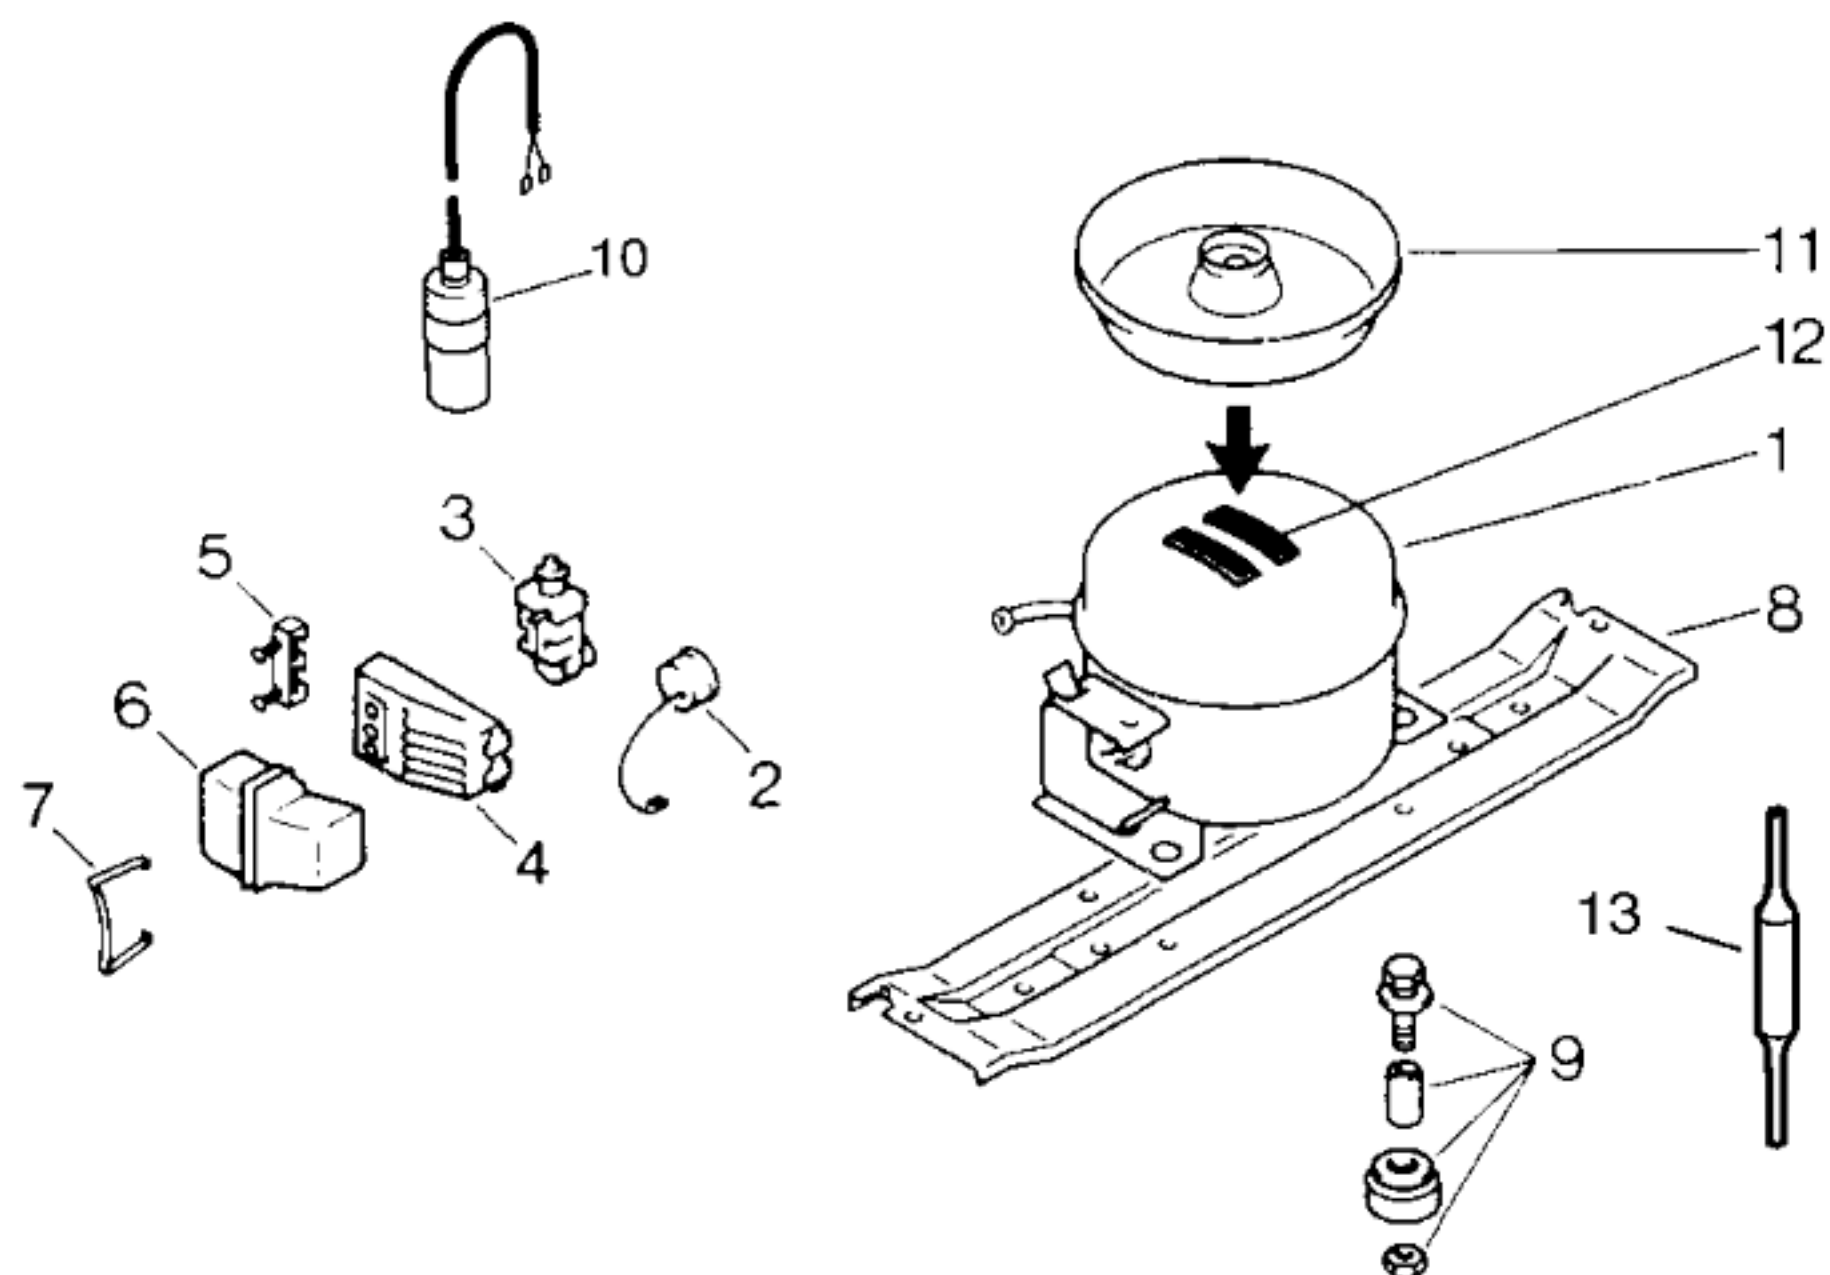

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Matsushita	
Typ/Type		D77C15RAW	
Förderleistung/Delivery/Débit	l/h	1184	
Anlaufstrom/Starting current/Cour de démarrage	A	9,2	
Widerstand/Resistance/Résistance	Ha/main/prin.	Ω	11,0
	Hi/aux	Ω	26,7
Temp.-Regler/Thermostat		Ranko	
Typ/Type		K59	
Reglerstellung/Position		kalt	warm
Schaltwerte/Switching values/	„ein“	+4,5	+4,5
Valeurs de commutation	„aus“	-31,0	-13,5
	(„abtauen“ od.)	„alarm“	
Füllmenge/Fill.quantity/Charge	R134a	g	120
Anschlußwert/Conn.load/Puiss. connectée	W	150	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance	Ω		
Leistung/Power/Puissance	W		
Ventilator/Blower/Ventilateur			
Widerstand/Resistance/Résistance	Ω		
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance	Ω		
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance	Ω		
Spannung/Voltage/Tension	V		

Pos.	Matsushita		
	D77C15RAW5		
1	14 1236		
2			
3	03 2035		
4			
5			
6	05 8458		
7	02 6731		
8	28 1825		
9	05 0166		
10	05 9467		
11	08 5182		
12	05 6008		
13	35 0026		