


**BOSCH**

GSA 2686-0 705 254 532-D1
 - 0 705 254 533-CH1
 - 0 705 254 534-SF1

GSA 2686-0 705 254 542-D2
 - 0 705 254 543-CH2

GEFRIERGERÄTE
 Gefrierschränke, Stand

Ident - Nummern - Konstante
 3740

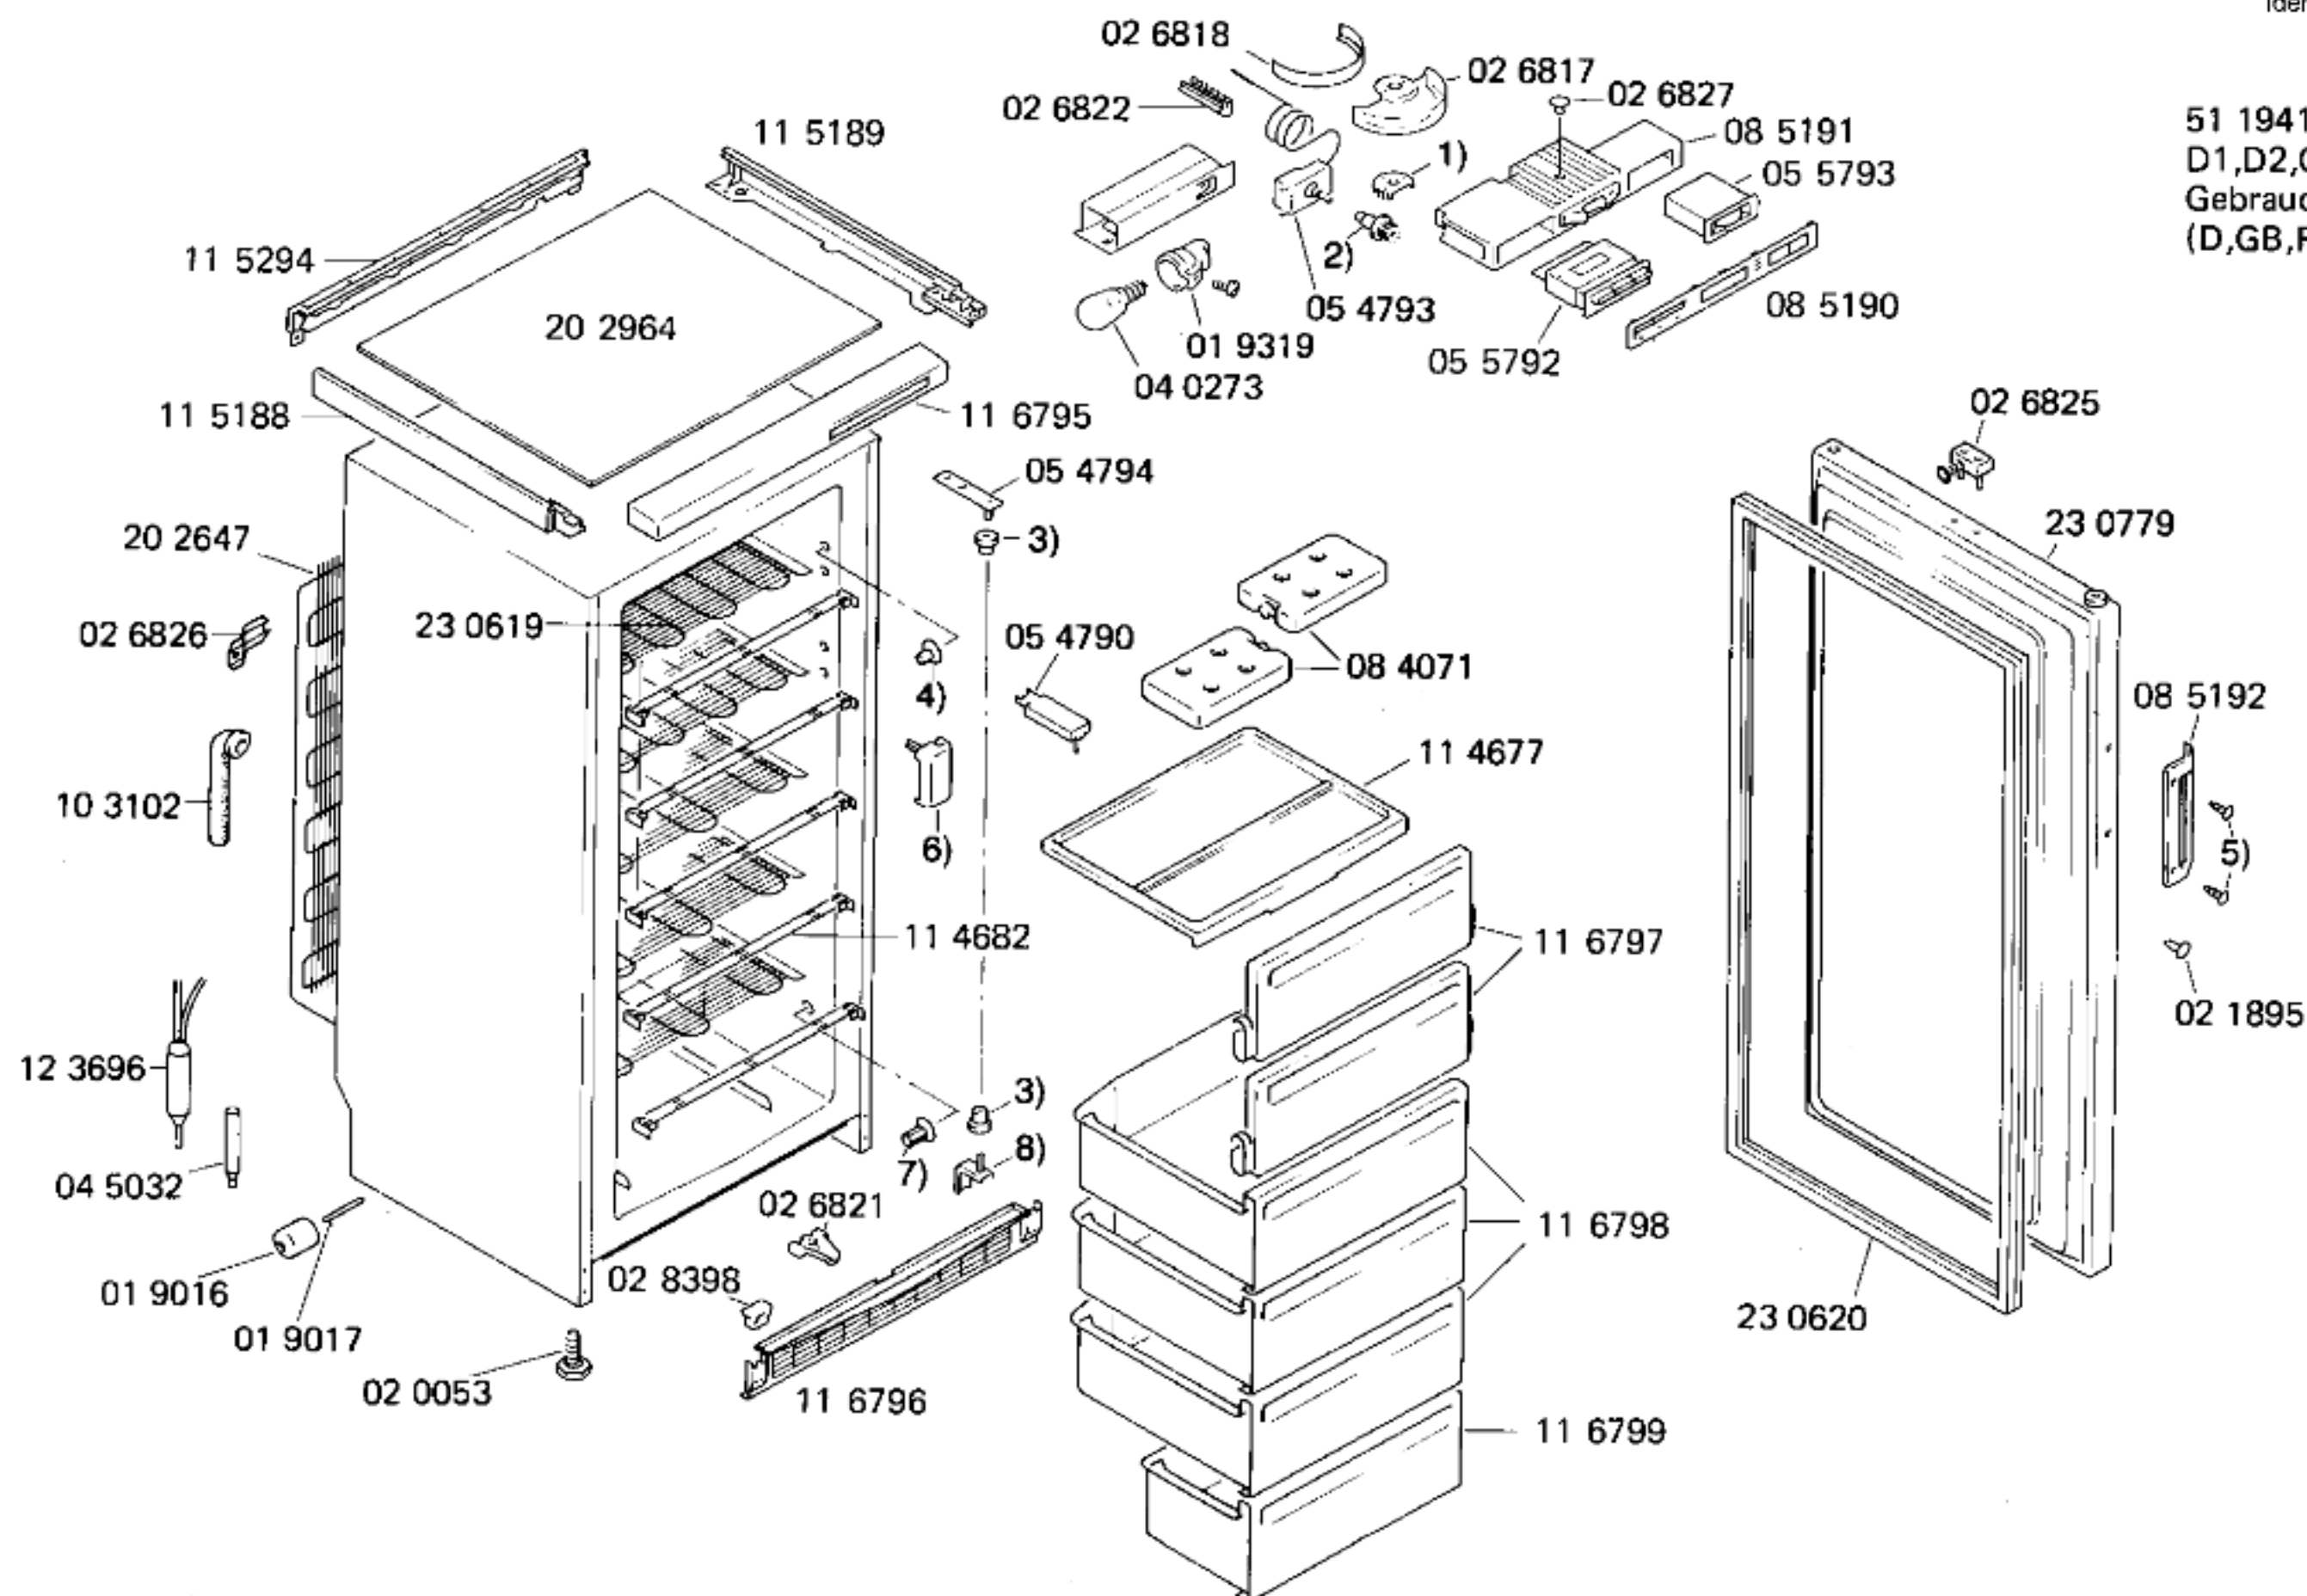

51 1941
 D1,D2,CH1,CH2,SF1
 Gebrauchsanweisung
 (D,GB,F,I,NL,P,SF,DK,E,S)

- 1) 02 6816
- 2) 02 6819
- 3) 01 2418
- 4) 02 6824
- 5) 01 9081
- 6) 02 6823
- 7) 01 8901
- 8) 05 4795


**BOSCH**

GSA 2686- 0 705 254 532-D1
 - 0 705 254 533-CH1
 - 0 705 254 534-SF1

GSA 2686- 0 705 254 542-D2
 - 0 705 254 543-CH2

GEFRIERGERÄTE
 Gefrierschränke, Stand

Ident - Nummern - Konstante
 3740

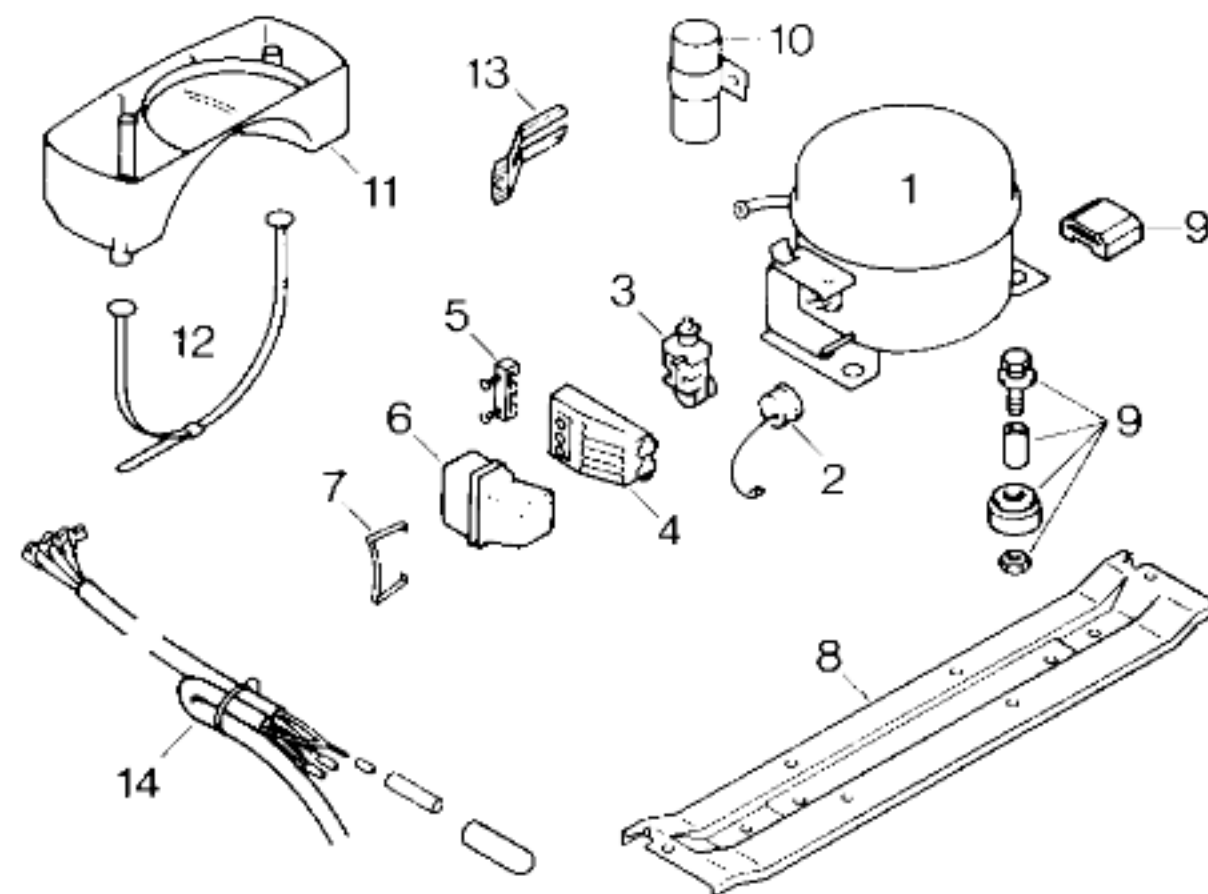

Pos.	D1,CH1,SF1	D2,CH2
	Aspera	Danfoss
1	14 0312	14 0157
2	02 6559	
3	02 2342	02 0108
4	05 1748	
5		02 1361
6	05 1746	05 1413
7	02 2339	
8		
9	05 0166	
10		
11		
12		
13		
14		

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Aspera	Danfoss		
Typ/Type		BY 1116 A	FR 8,5 A		
Förderleistung/Delivery/Débit	l/h	1450	1430		
Anlaufstrom/Starting current/Cour. de démarrage	A	9,9	10,3		
Widerstand/Resistance/Résistance	Ha/main/prin.	11,7	12,2		
	Hi/aux	37,7	13,7		
Temp.-Regler/Thermostat		Danfoss			
Typ/Type		077 B 2054			
Reglerstellung/Position		kalt	warm		
Schaltwerte/Switching values/	„ein“ °C	- 24	- 16		
Valeurs de commutation	„aus“	- 34	- 24		
	[„abtauen“ od.] „alarm“	- 19	- 12		
Füllmenge/Fill.quantity/Charge	R12	g	185		
Anschlußwert/Conn.load/Puiss. connectée		W	150		
Heizung/Heater/Chauffage					
Widerstand/Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand/Resistance/Résistance		Ω			
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			