



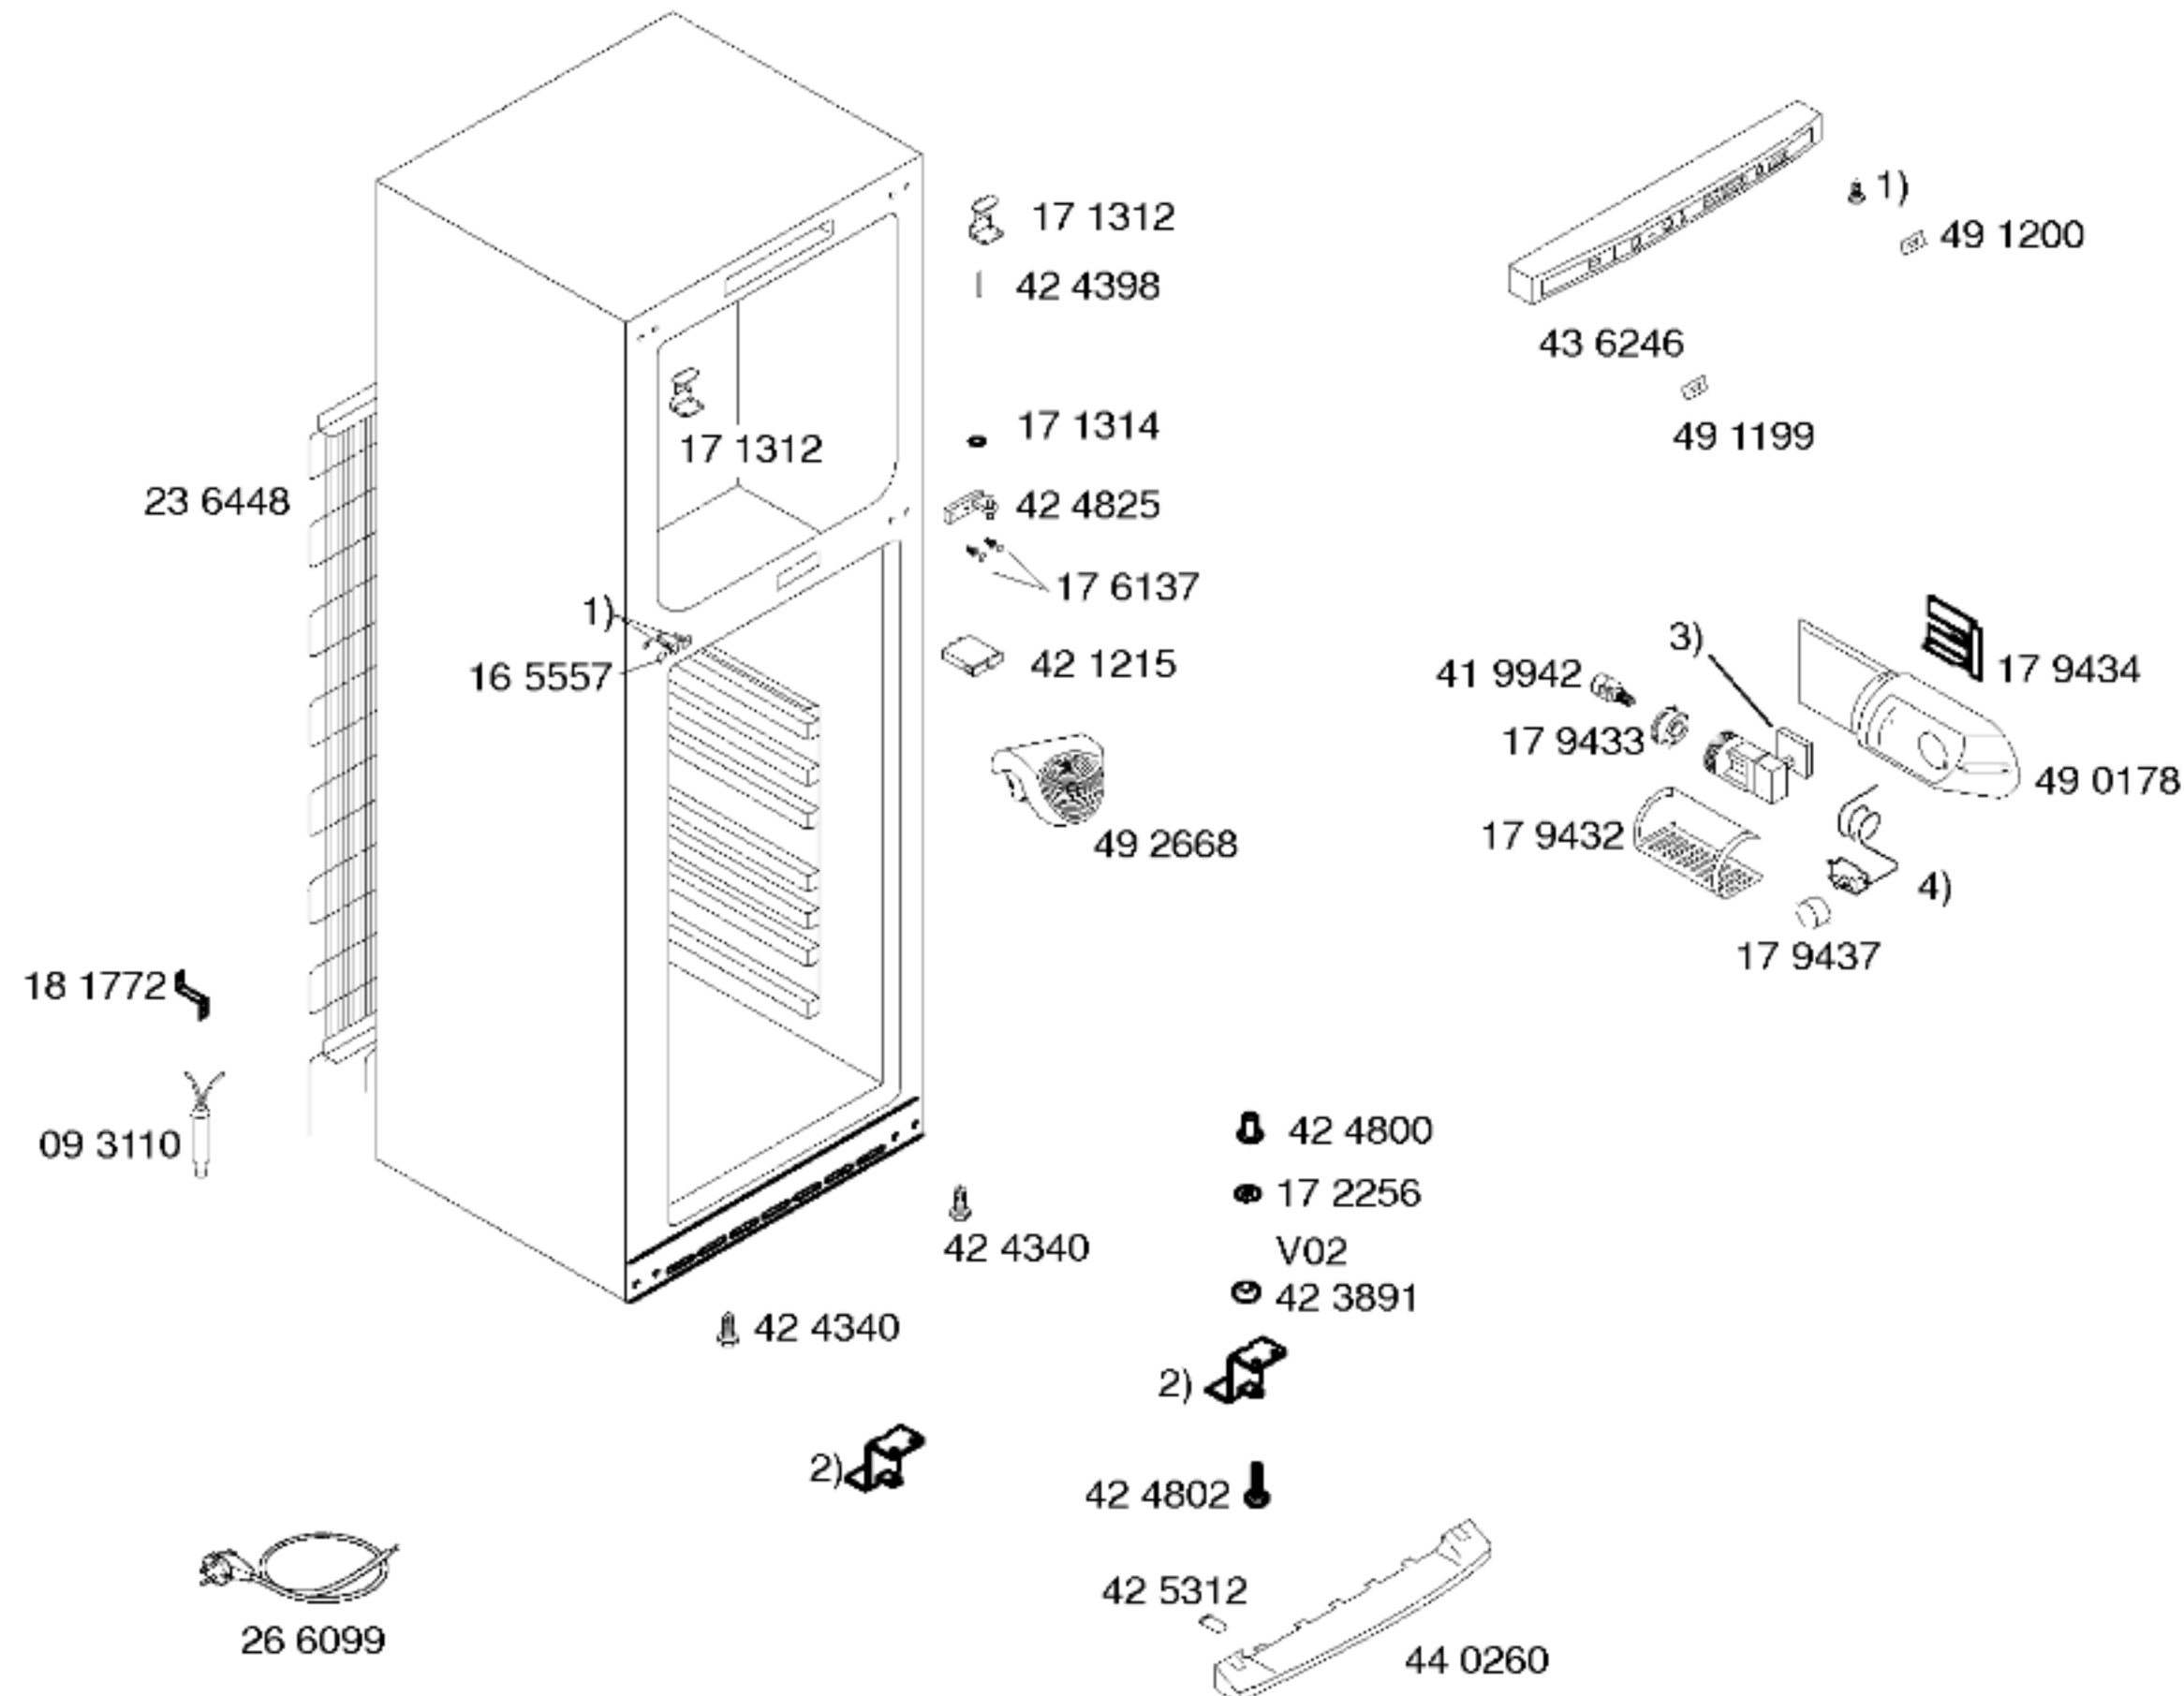

Kullanma kilavuzu
59 1293
(TR)

- 1) 16 5552
2) 42 4801
V01
42 8184
V02
3) 17 9431
V01
42 9410
V02
4) 18 7574
V01
42 9407
V02

35 4598




48 0527

48 0527



47 3886


47 1189

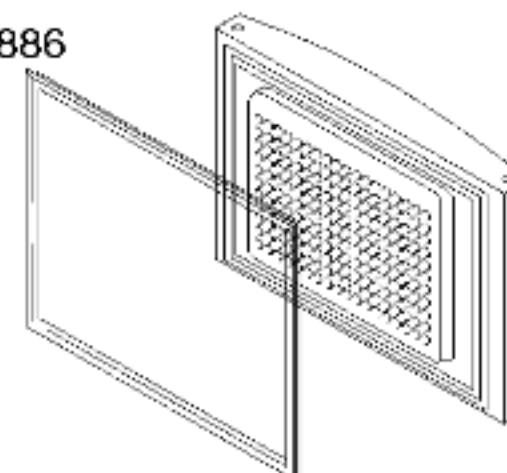

49 0705



2) 1)
2) 1)
2) 1)
2) 1)

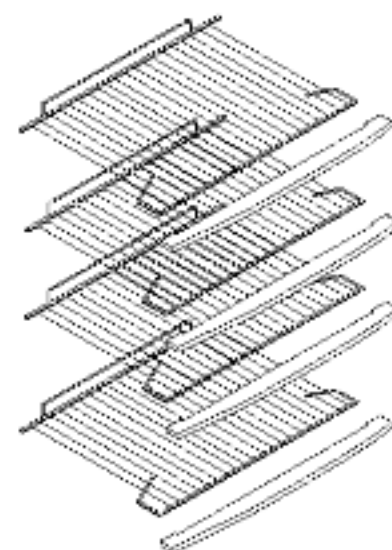


42 1330

42 1329

42 1330

44 0983

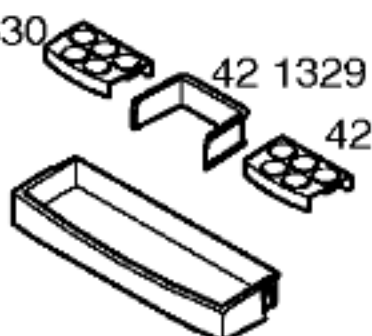


44 0983



43 5406




44 0985



16 6484

17 1319

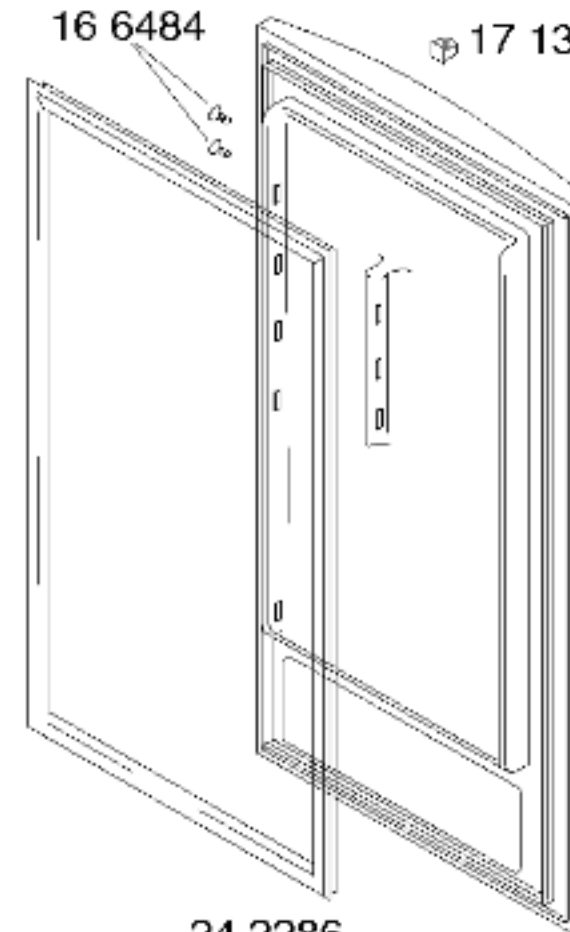


49 0705




24 2286

24 1828

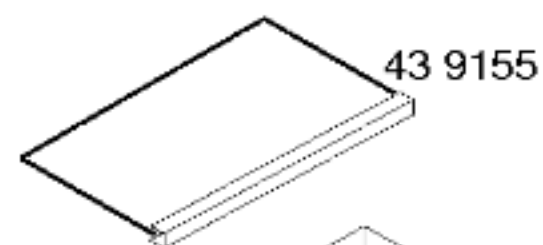


43 9155

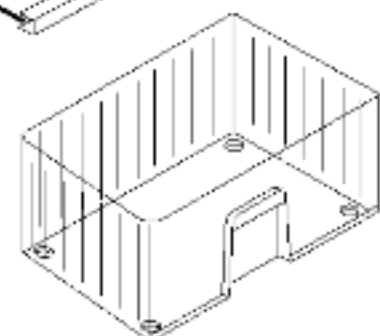

43 5048

1) 44 1144
2) 35 4166

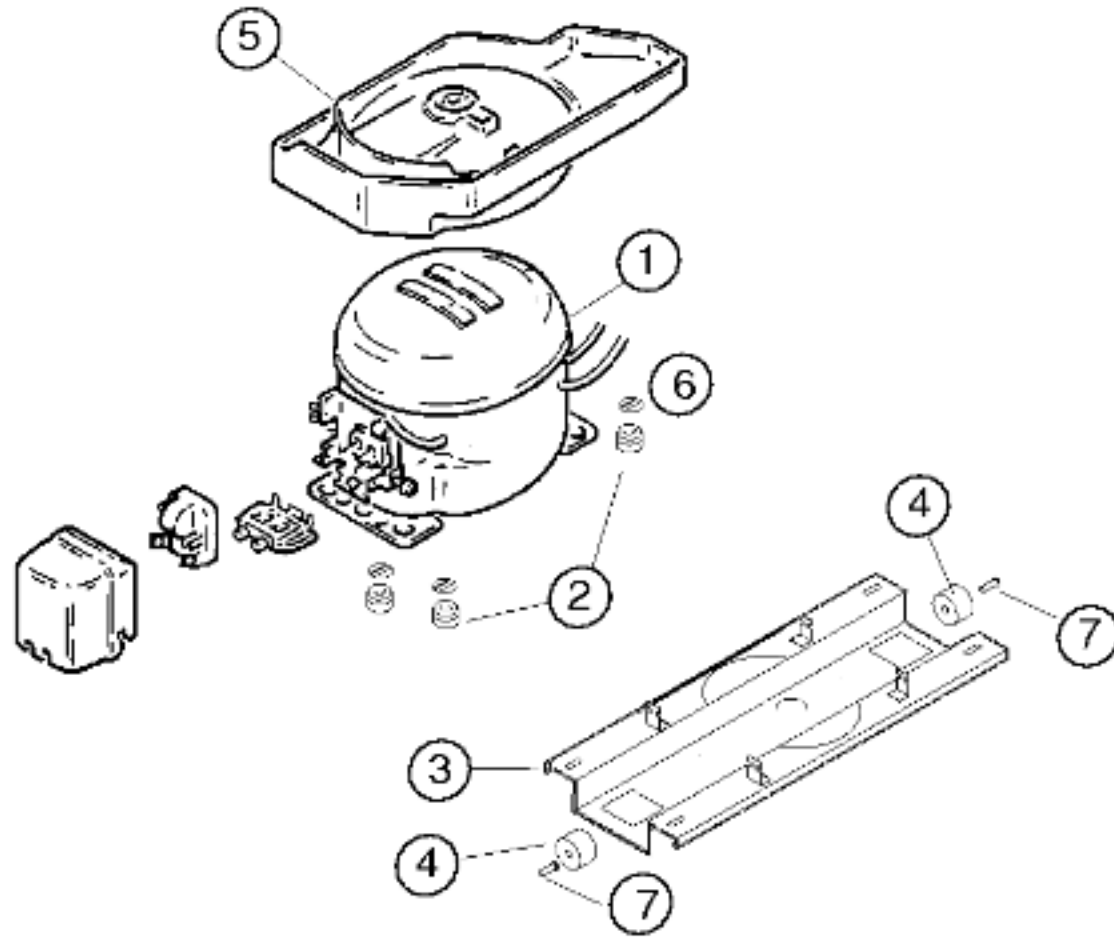

Pos.	Matsushita		
	DC125E		
1	14 2338		
2	16 3427		
3	35 4583		
4	17 1318		
5	49 4670		
6	17 1519		
7	18 1014		
8			
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör Typ/Type/Tip Förderleistung/Delivery/Verim/h Anlaufstrom/Starting current/Giris akimi Widerstand/Resistance/Rezistans Ha/ Hi/aux.	Matsushita DC125E15 A Ohm		
Temp.Reyler/Thermostat/Termostat Typ/Type/Tip Reglerstellung/Position/Termostat pozisyonu Schaltwerte/Actua kapama degerleri Valeurs de commutation/Termostat degeri (...abtaven' od)	Danfoss ..ein/acma °C ..aus"/kapama ..alarm'	+4.5 +4.5 -31 -18	
Füllmenge/Fill. quantity/ Dolum miktarı	R600a	g	*
Anschlusswert/Comm. load/Giris gucu	W	*	
Heizung/Heater/Rezistans Widerstand/Resistance/Direnc Leistung/Power/Guc	Ohm W		
Ventilador/Blower/Vantilatör Widerstand/Resistance/Rezistans	Ohm		
Magnetventil/Magnetic valve/Manyetik valf Widerstand/Resistance/Rezistans Spannung/Voltage/Gerilim	Ohm V		
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakınız