



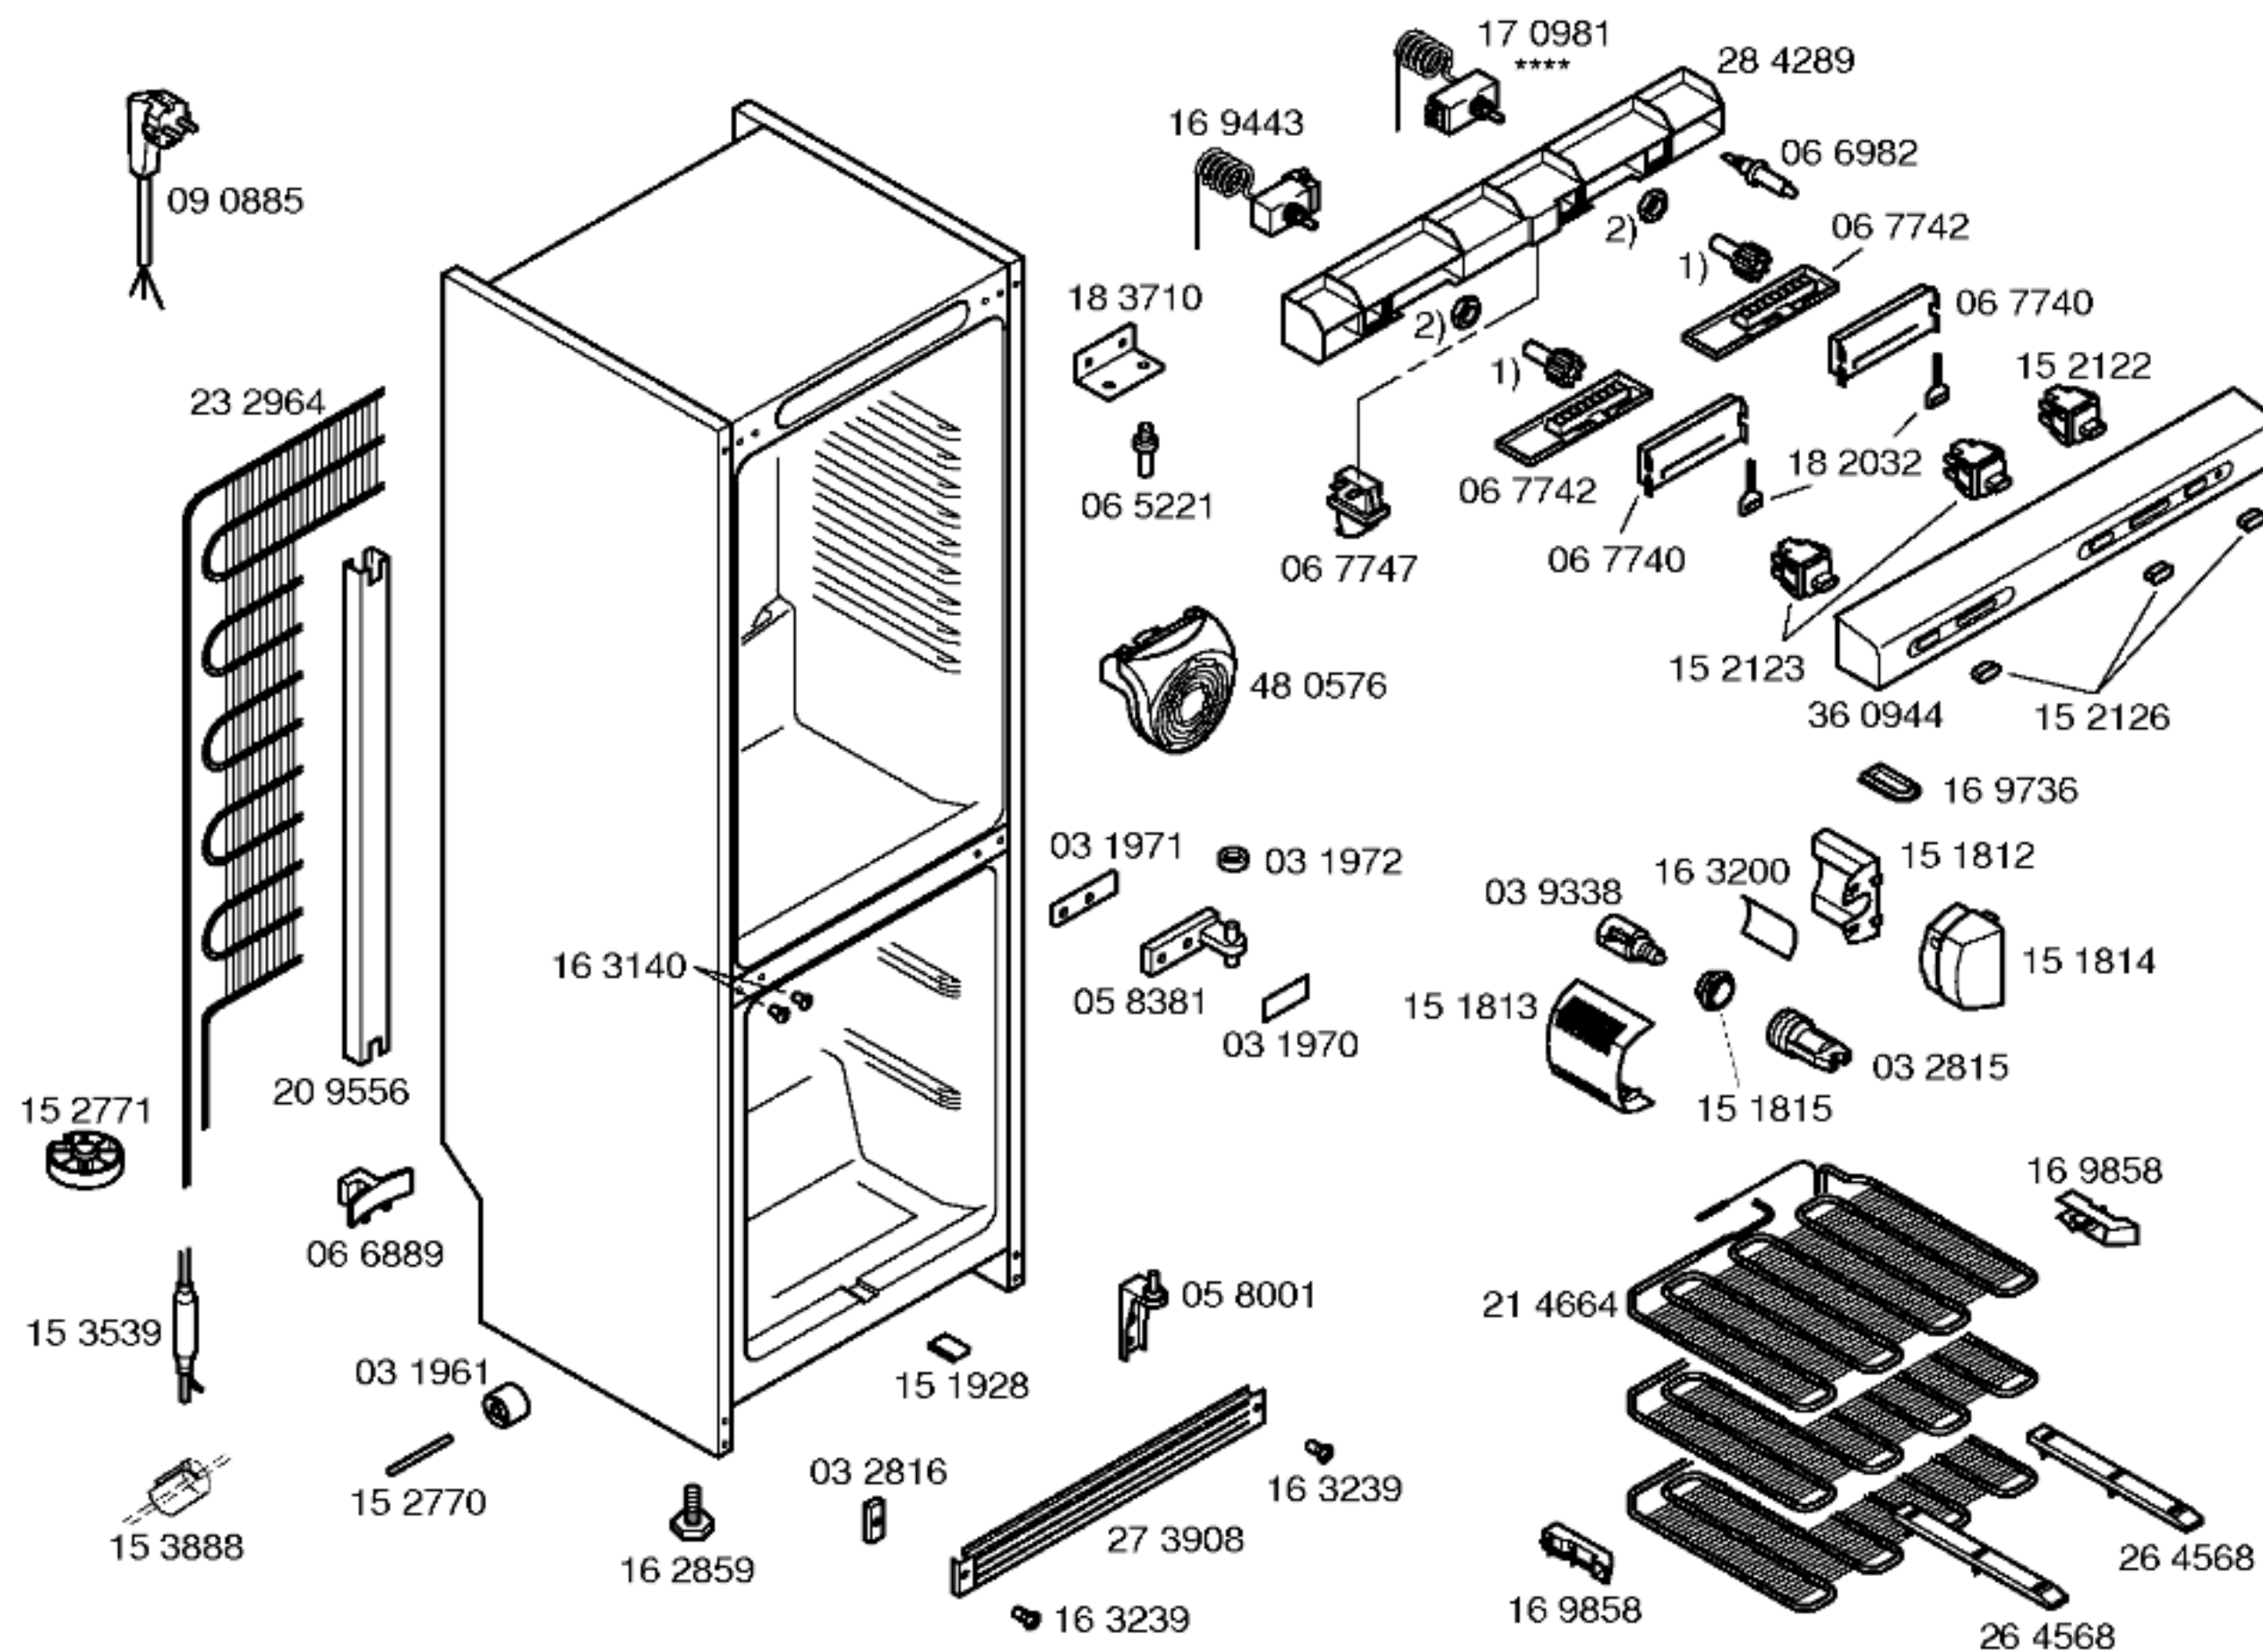


Libro de instrucciones
52 7873
(E,GB,F,D,P)

Instrucc. dispensador
51 6722
(E,GB,F,P,NL,GR)

1) 06 7746
2) 03 3058

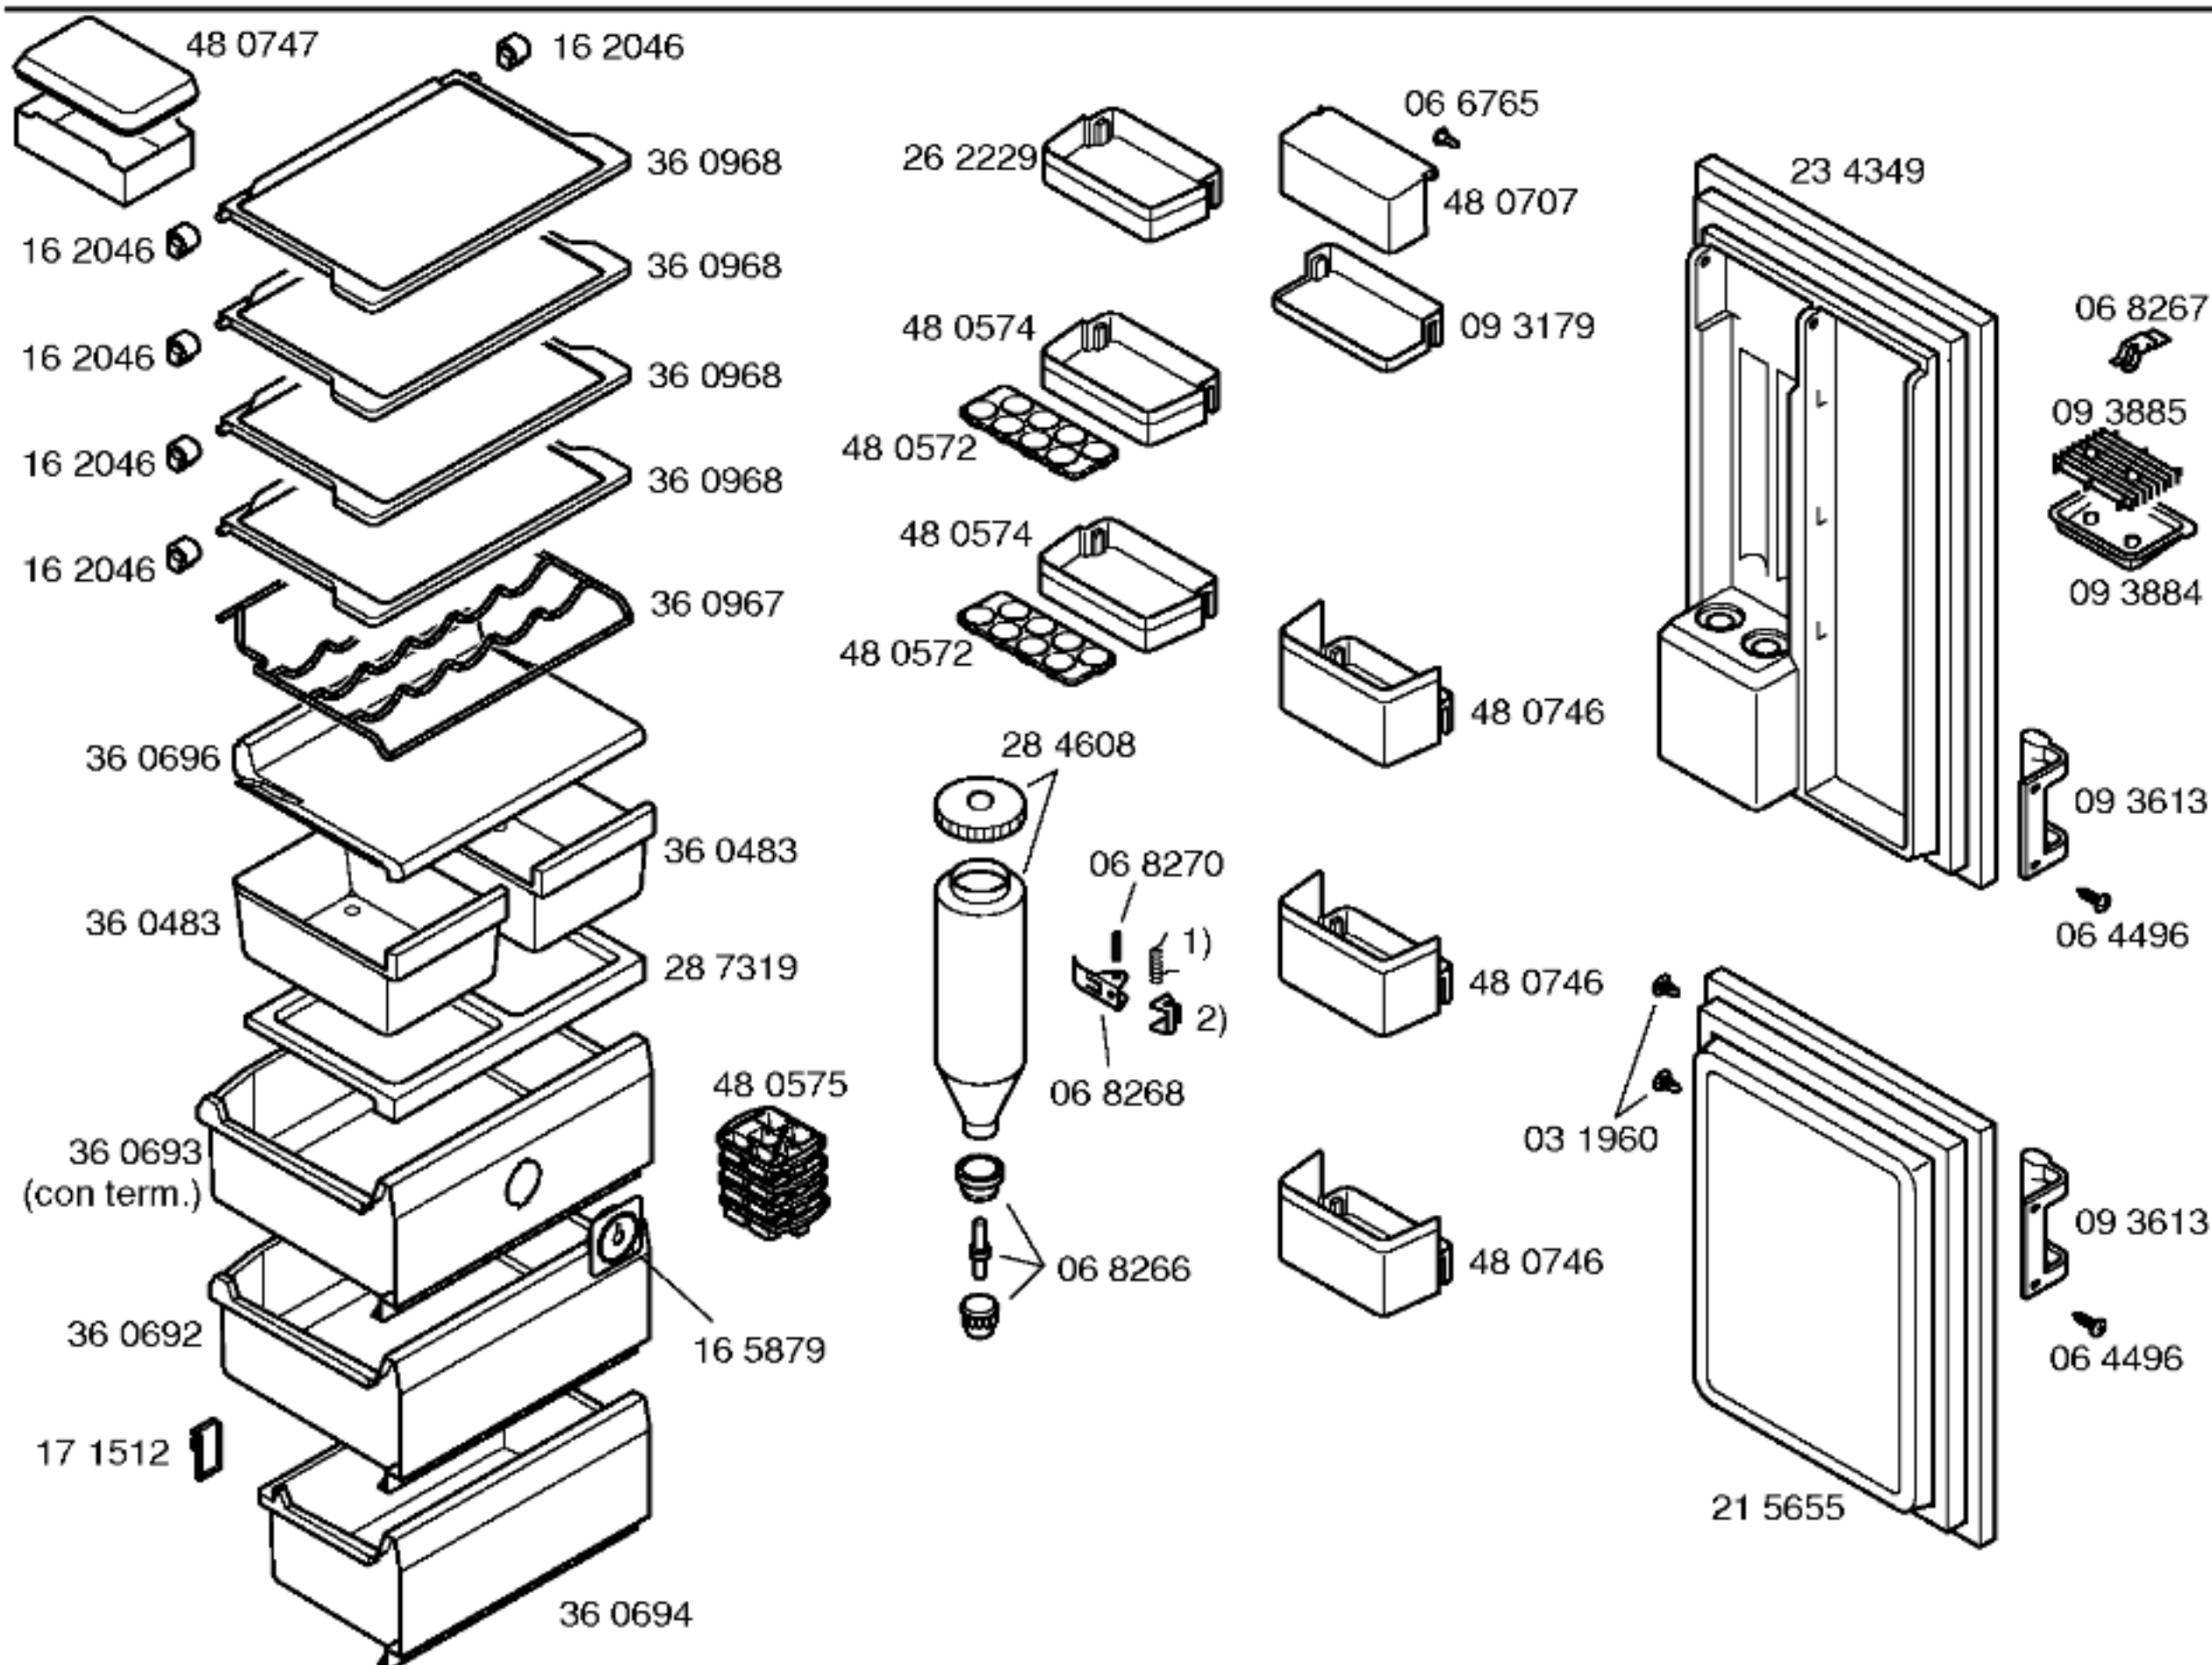

1) 06 8271
2) 06 8269

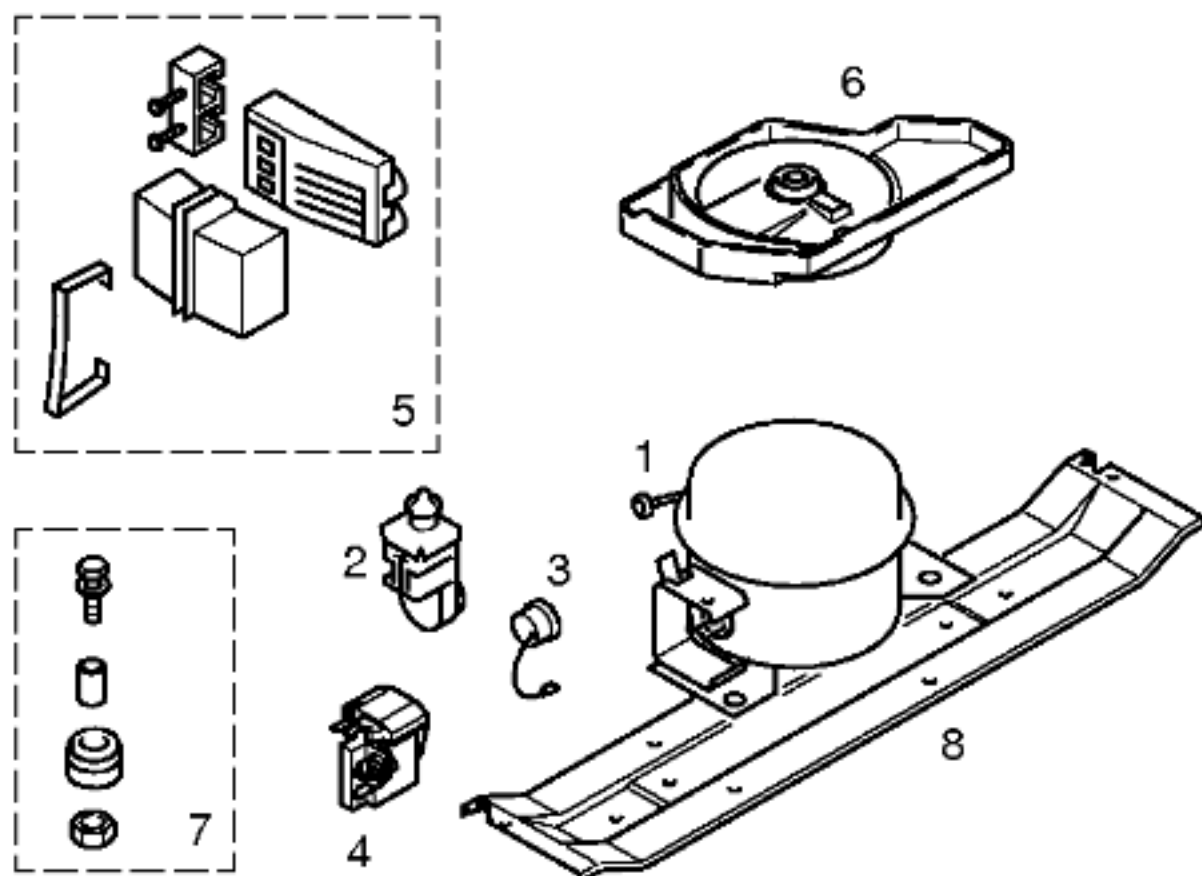

Pos.		****	****	
		V01	V02	
	Aspera	Gold Star	Aspera	
	BPK1072Y	ND69NAEG	BPK1084Y	
1	14 2000	14 2001	14 2001	
2	15 4315		15 4315	
3	17 3748		16 7769	
4		17 1011		
5				
6	26 4123			
7	05 0166	05 0166	05 0166	
8	28 8253	28 8253	28 8253	
9				
10				
11				

TECHNISCHE DATEN/TECHNICAL DATA/DONNEES TECHNIQUES/DATOS TECNICOS				
		****	****	
Verdichter/Compressor/Compresseur/Compresor Typ/Type/Tipo	Aspera BPK1072Y	Gold Star ND69NAEG	Aspera BPK1084Y	
Förderleistung/Delivery/Debit/Aspiración l/h				
Anlaufstrom/Starting current/Cour.démarrage/Int.arranq. A	0,47		0,52	
Widerstand/Resistance/Resistencia. Ha/main/prin. Ohm	33,10		29,35	
Hi/aux.	38,20		41,25	
Temp.Reyler/Thermostat/Termostato Typ/Type/Tipo	Ranco K59-L6050	Ranco K54-L2007		
Reglerstellung/Position/Conexión	MIN. MAX.	MIN. MAX.		
Schaltwerte/Switching values/ ..ein/conex.°C	+6°	-14° -22°		
Valeurs de commutation/Desconex. ..aus"/descon.	-11° -28°	-20° -28°		
(..abtaven' od) ..alarm'		-10° -18°		
Füllmenge/Fill. quantily/Charge/Carga R600a	g	*	*	*
Anschlusswert/Comm. load/Puiss. Connect./Potenc. W	79	83	87	
Heizung/Heater/Chaufrage/Resistenc.descong. Widerstand/Resistance/Resistencia Ohm				
Leistung/Power/Puissance/Potencia W				
Ventilador/Blower/Ventilateur/Ventilador Widerstand/Resistance/Resistencia Ohm				
Magnetventil/Magnetic valve/Electrovanne/Electrovalvula Widerstand/Resistance/Resistencia Ohm				
Spannung/Voltage/Tension/Tensión V				
Temp.Reyler/Thermostat/Termostato ambiente para ventilador refrigerador				

* Siehe Typenschild / See identification plate / Voir plaque de caractéristiques / Ver plaqueta de características