



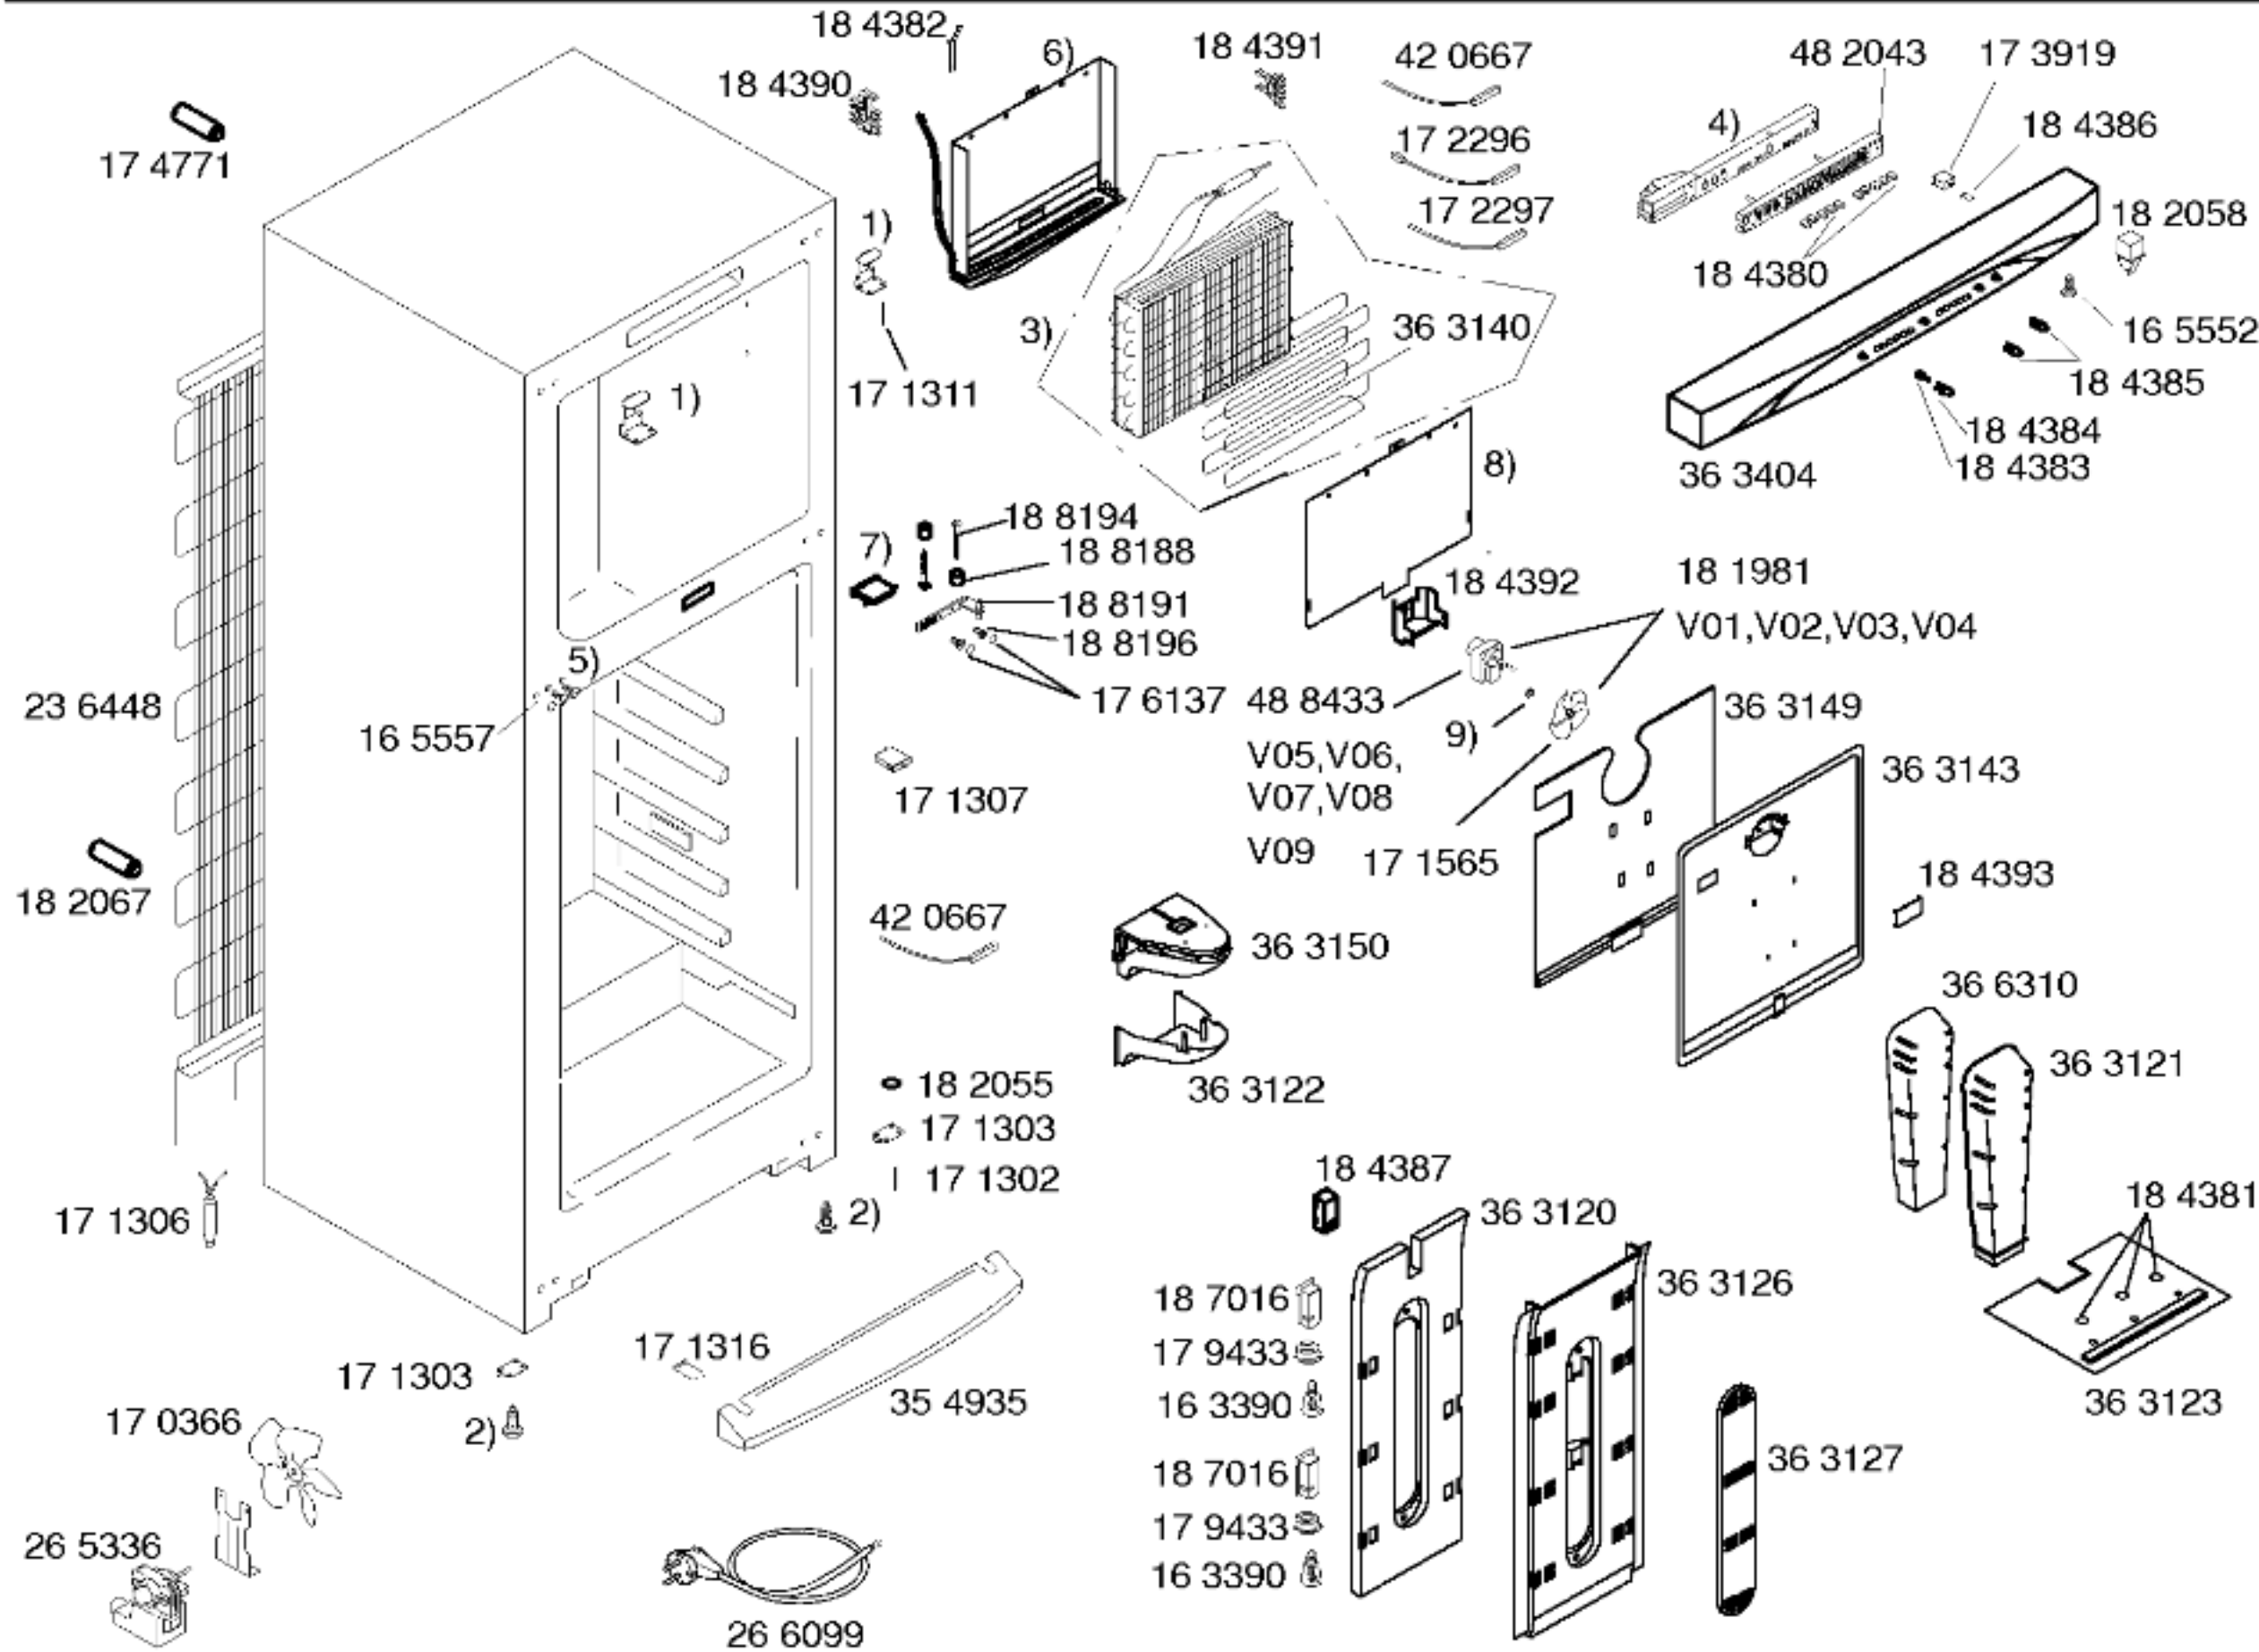

Kullanma kilavuzu
52 9449

- 1) 17 1312
- 2) 17 1304
- 3) 36 3138
- 4) 48 2032
- V01,V02
- 48 4350
- V03,V04,V05,V06
- V07,V08
- 48 9131
- V09
- 5) 16 5552
- 6) 36 3134
- V01,V02,V03
- 36 9509
- V04,V05,V06,V07
- V08,V09
- 7) 18 8197
- V01,V02,V03,V04
- V05,V06,V07,V08
- 41 8128
- V09
- 8) 36 3153
- V01
- 36 6903
- V02,V03,V04,V05
- V06,V07,V08,V09
- 9) 17 1508

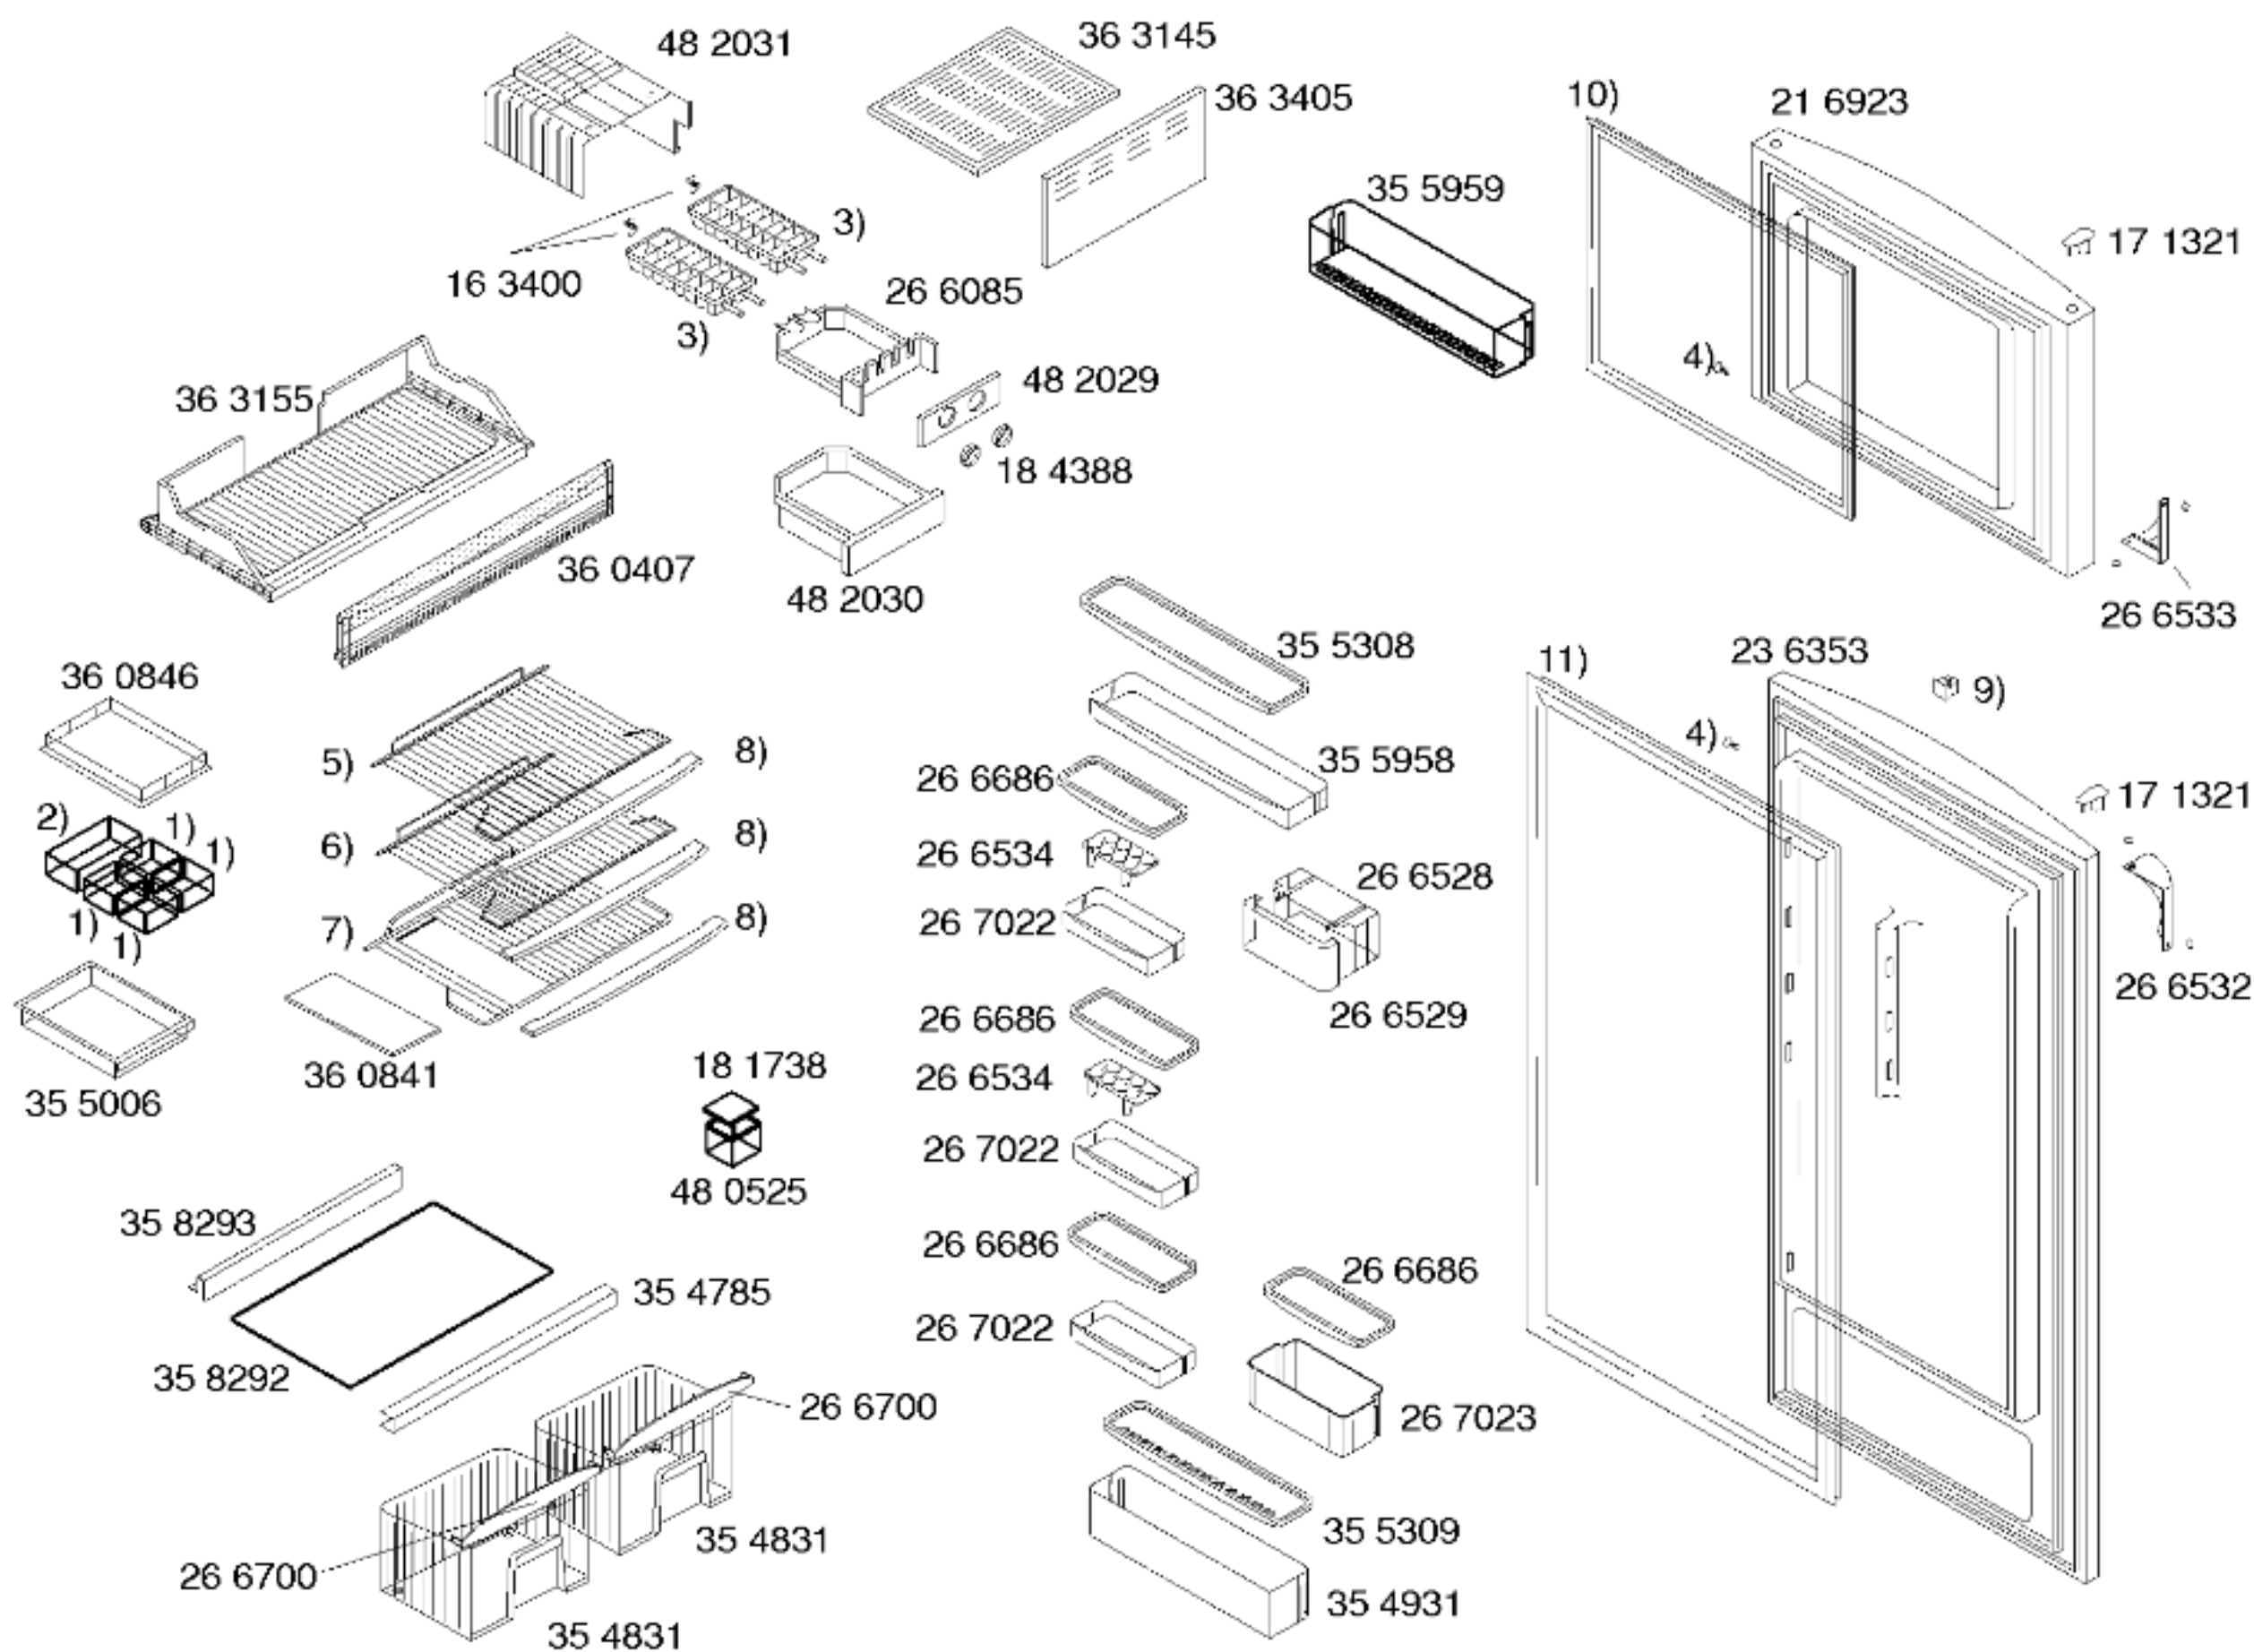

1) 48 0523

2) 48 0522

3) 26 9013

4) 16 6484

5) 36 0844

6) 35 5835

7) 36 0840

8) 35 4789

9) 17 1319

10) 21 6864

V01,V02,V03,V04

V05,V06,V07

21 8856

V08,V09


11) 23 6374

V01,V02,V03,V04

V05,V06,V07

23 8423

V08,V09

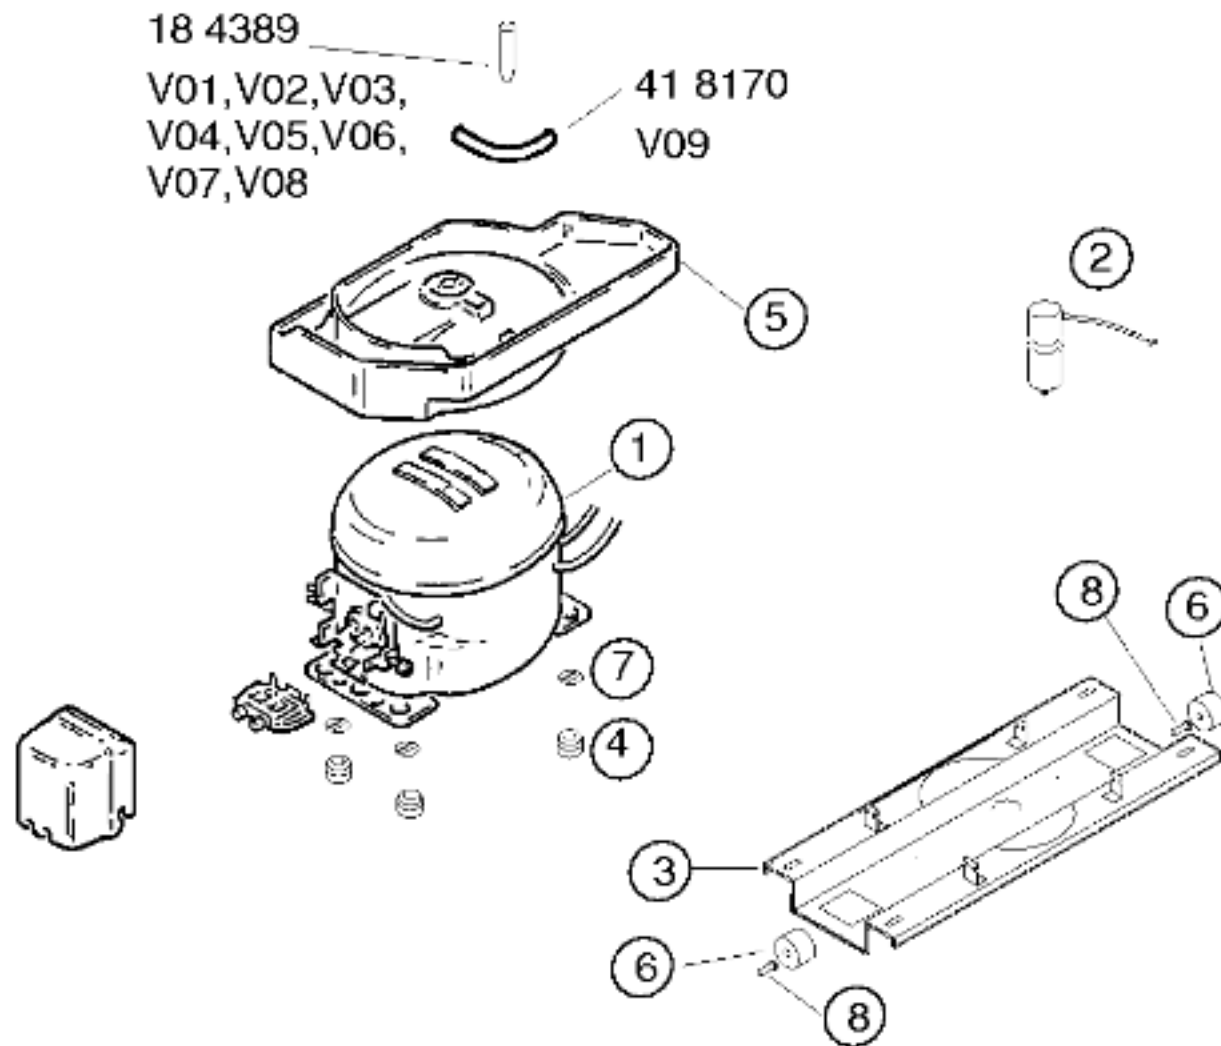

Pos.		V09	
	Danfoss		
	NLE15KTK		
1	14 2175		
2	41 6399	17 4093	
3	35 4583		
4	16 3427		
5	26 5327		
6	17 1318		
7	17 1519		
8	18 1014		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BILGILER				
Verdichter/Compressor/Kompresör		Danfoss		
Typ/Type/Tip		NLE15KTK		
Förderleistung/Delivery/Verim/h				
Anlaufstrom/Starting current/Giris akimi		A	12.8	
Widerstand/Resistance/Rezistans Ha/		Ω	8.9	
Hi/aux.			12	
Temp.Reyler/Thermostat/Termostat				
Typ/Type/Tip				
Reglerstellung/Position/Termostat pozisyonu				
Schaltwerte/Actua kapama degerleri		..ein/acma °C		
Valeurs de commutation/Termostat degeri		..aus"/kapama		
(..abtaven' od)		..alarm'		
Füllmenge/Fill. quantily/ Dolum miktarı		R600a	g	*
Anschlusswert/Comm. load/Giris gucu		W	200	
Heizung/Heater/Rezistans		Ω	Verdampfer	AAblaufrinne
Widerstand/Resistance/Direnc		W	186	B1
Leistung/Power/Guc				Klappe
Ventilador/Blower/Vantilatör		Ω		
Widerstand/Resistance/Rezistans				
Magnetventil/Magnetic valve/Manyetik valf		Ω		
Widerstand/Resistance/Rezistans		V		
Spannung/Voltage/Gerilim				
Temp.Reyler/Thermostat/Termostat				

* Siehe Typenschild/Mamul etiketine bakınız