



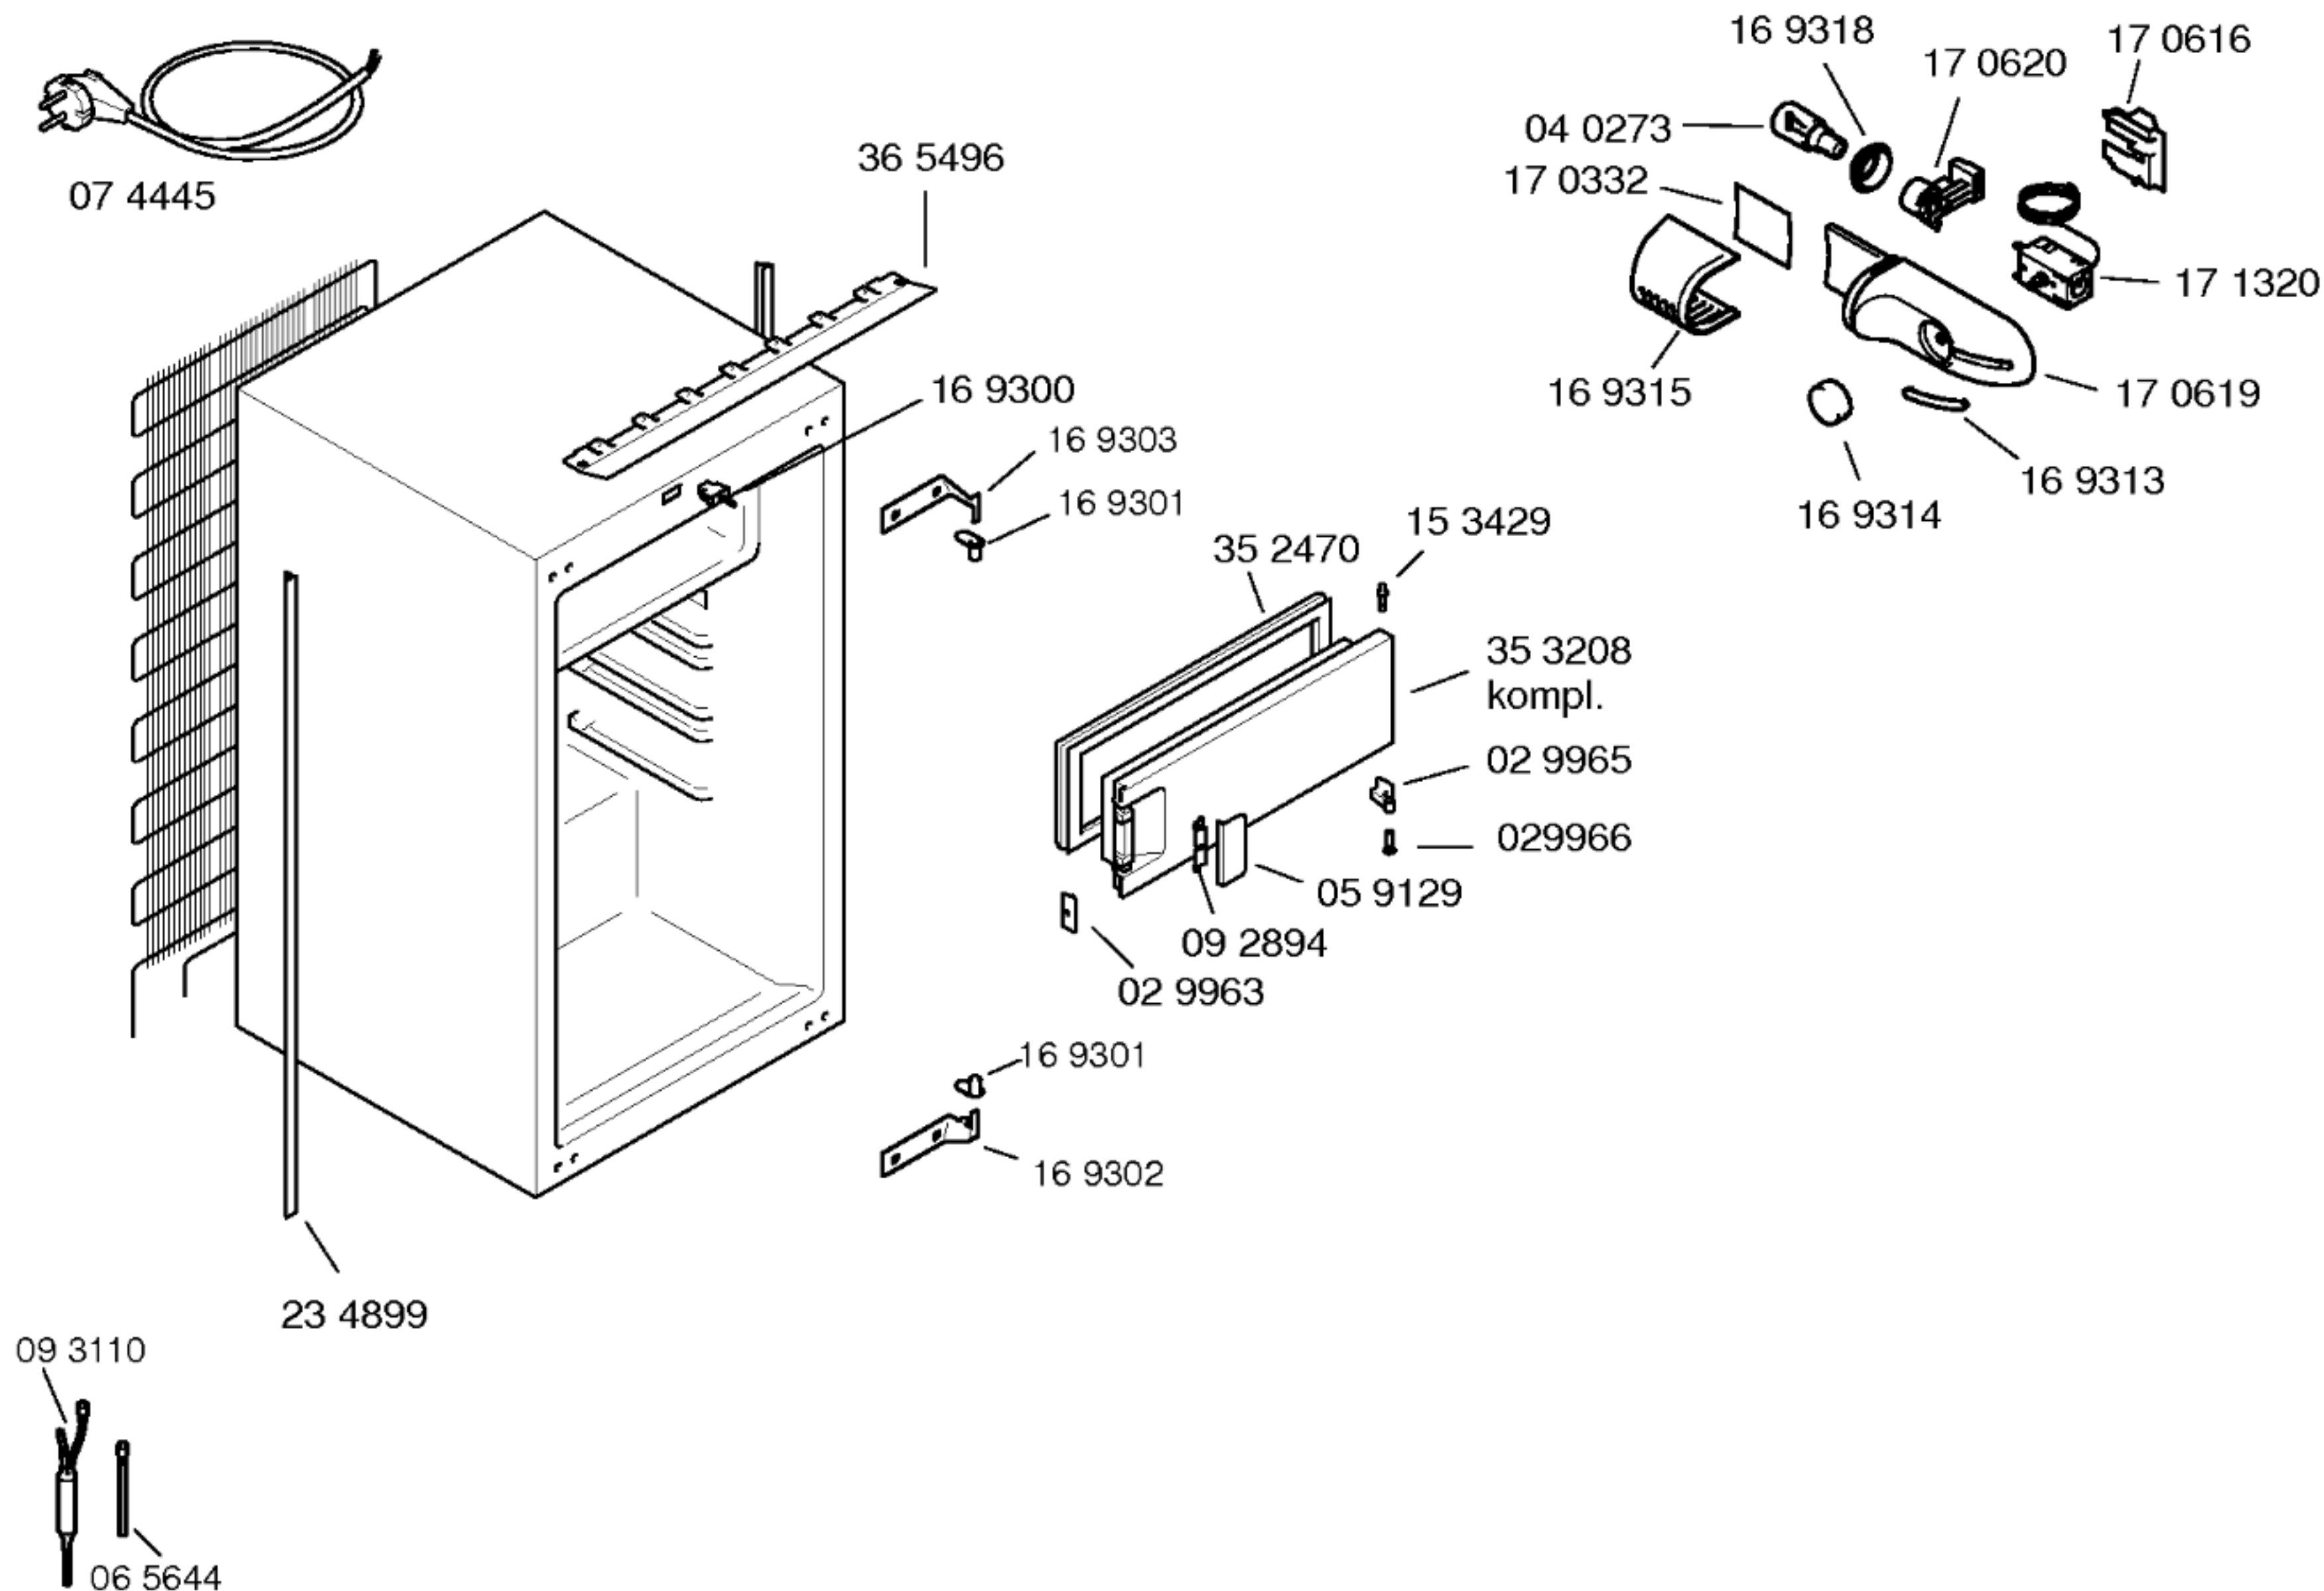


Gebrauchsanweisung  
52 2536  
(D,GB,F,I,NL)

Montageanleitung  
52 1893  
(D,GB,F,I,NL,DK,N,SF,  
SE,TR)

Beistellsatz  
26 4862

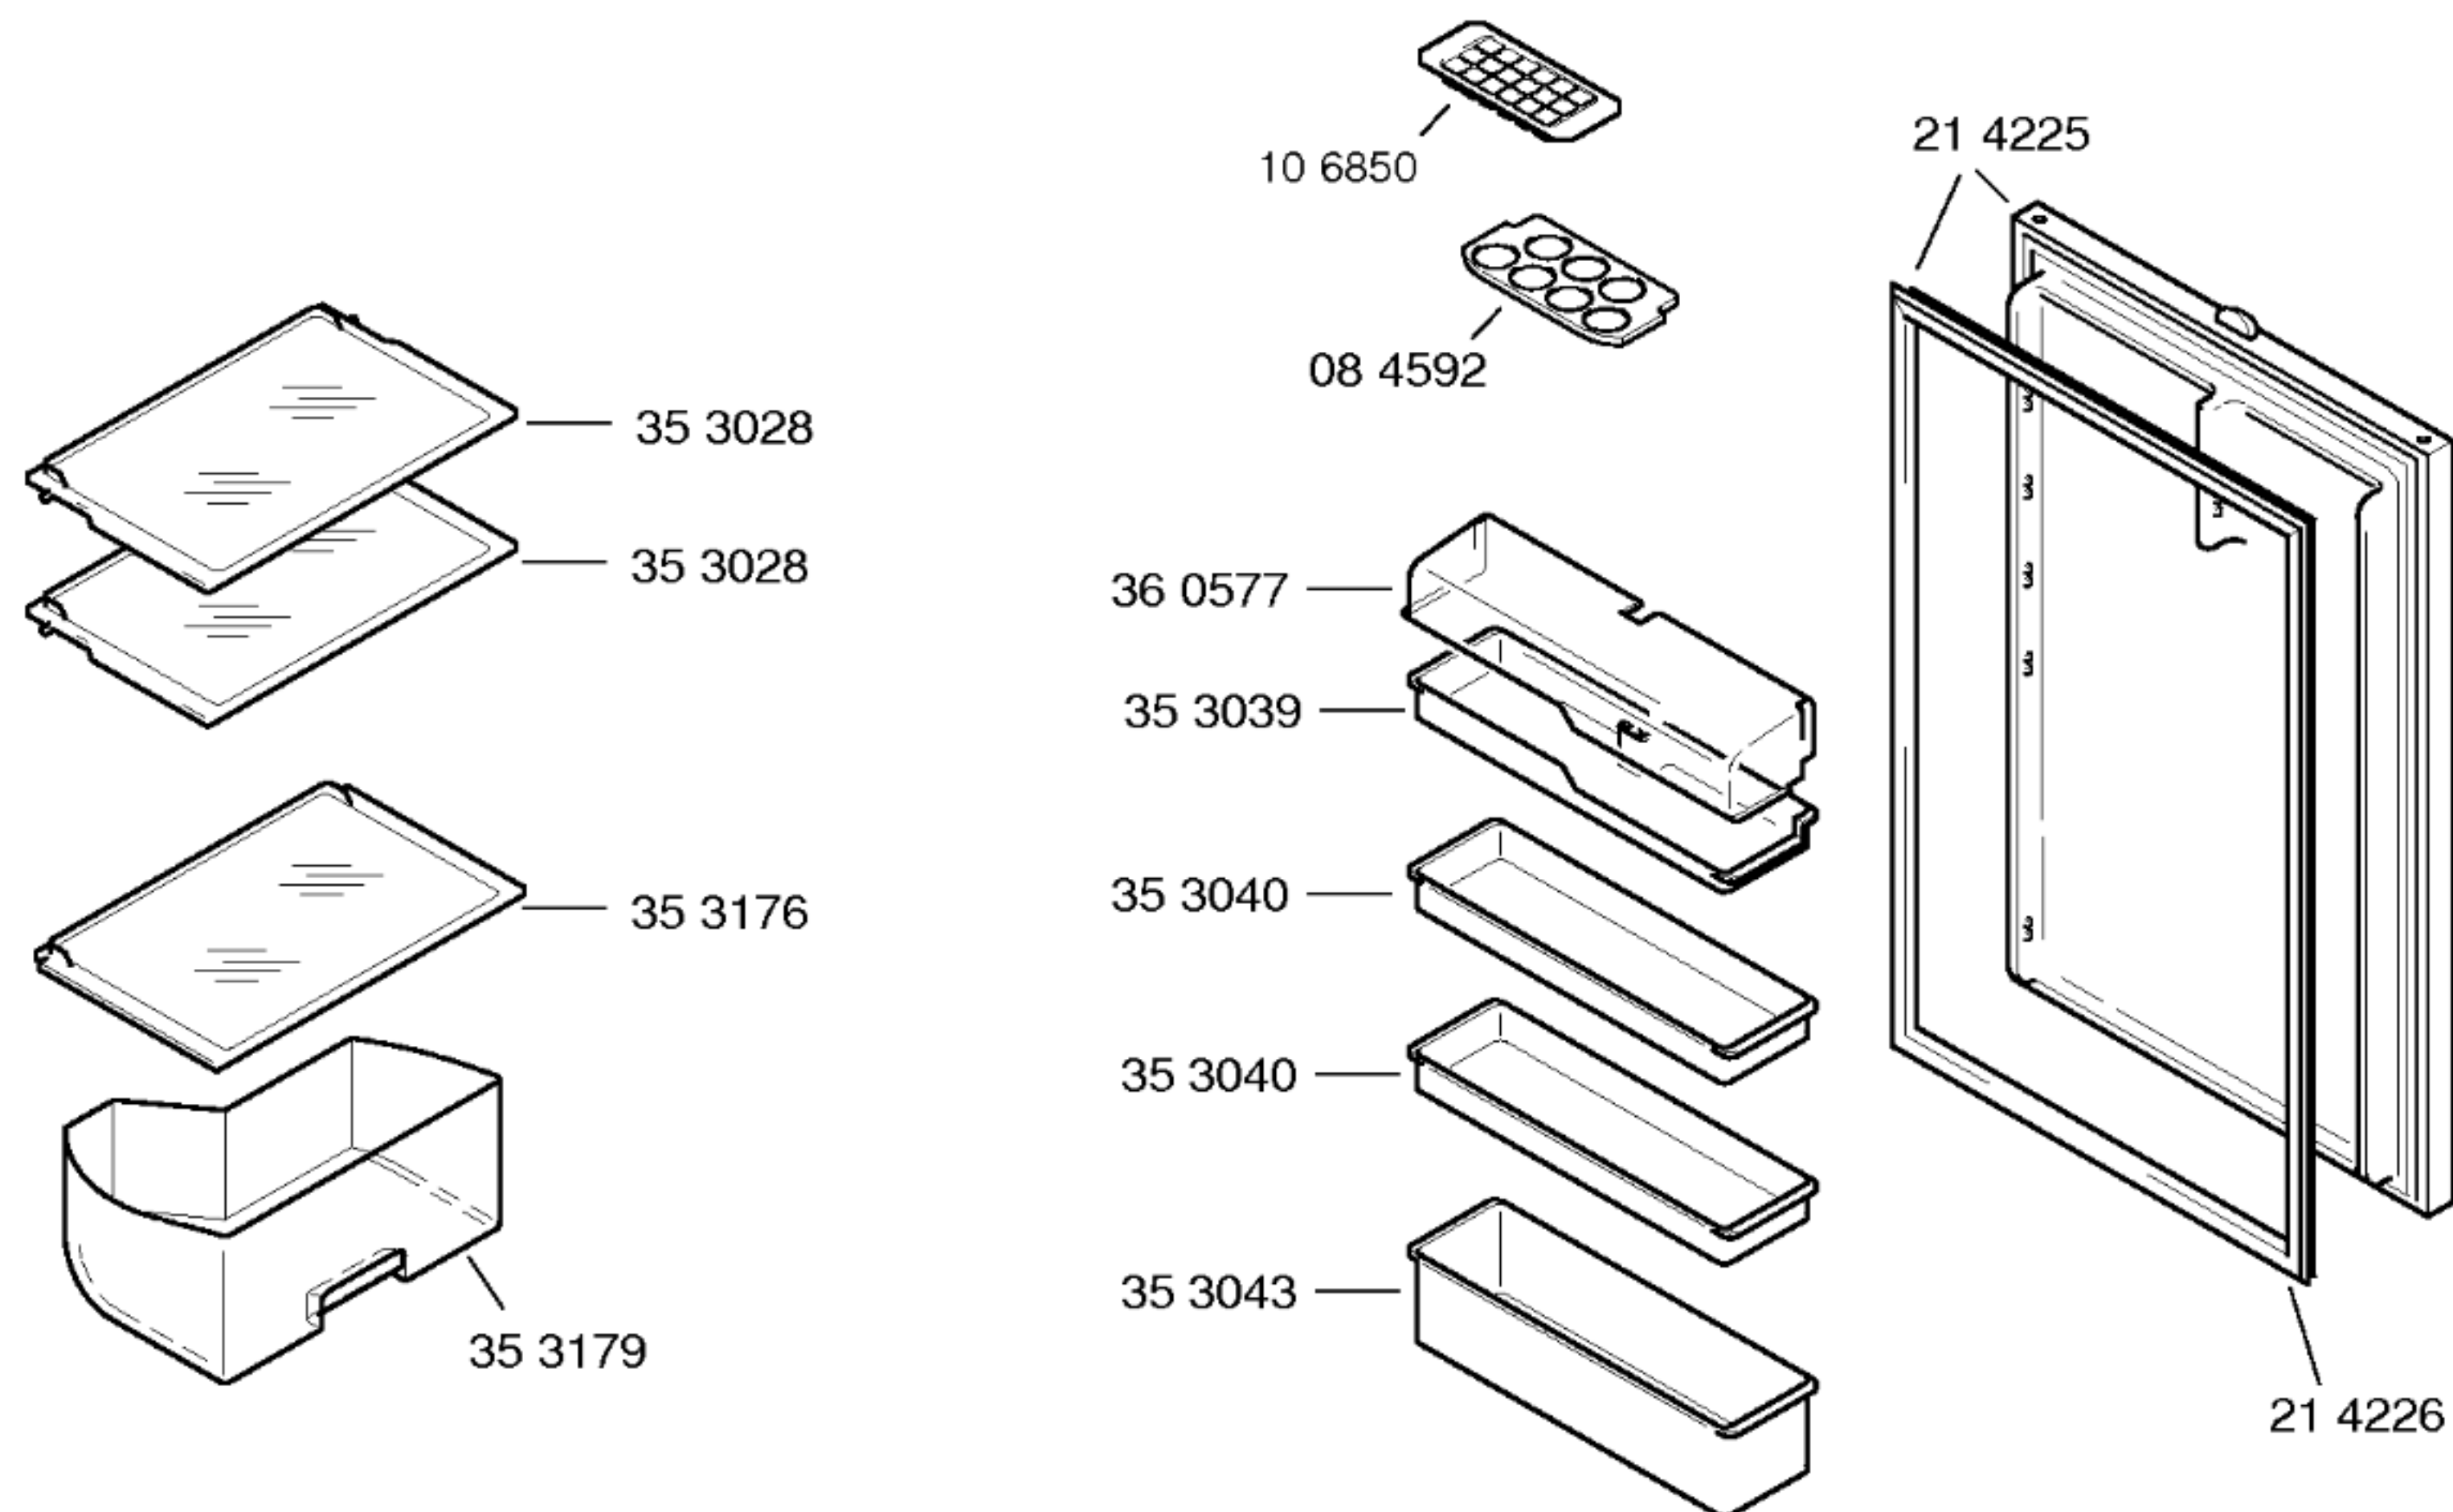



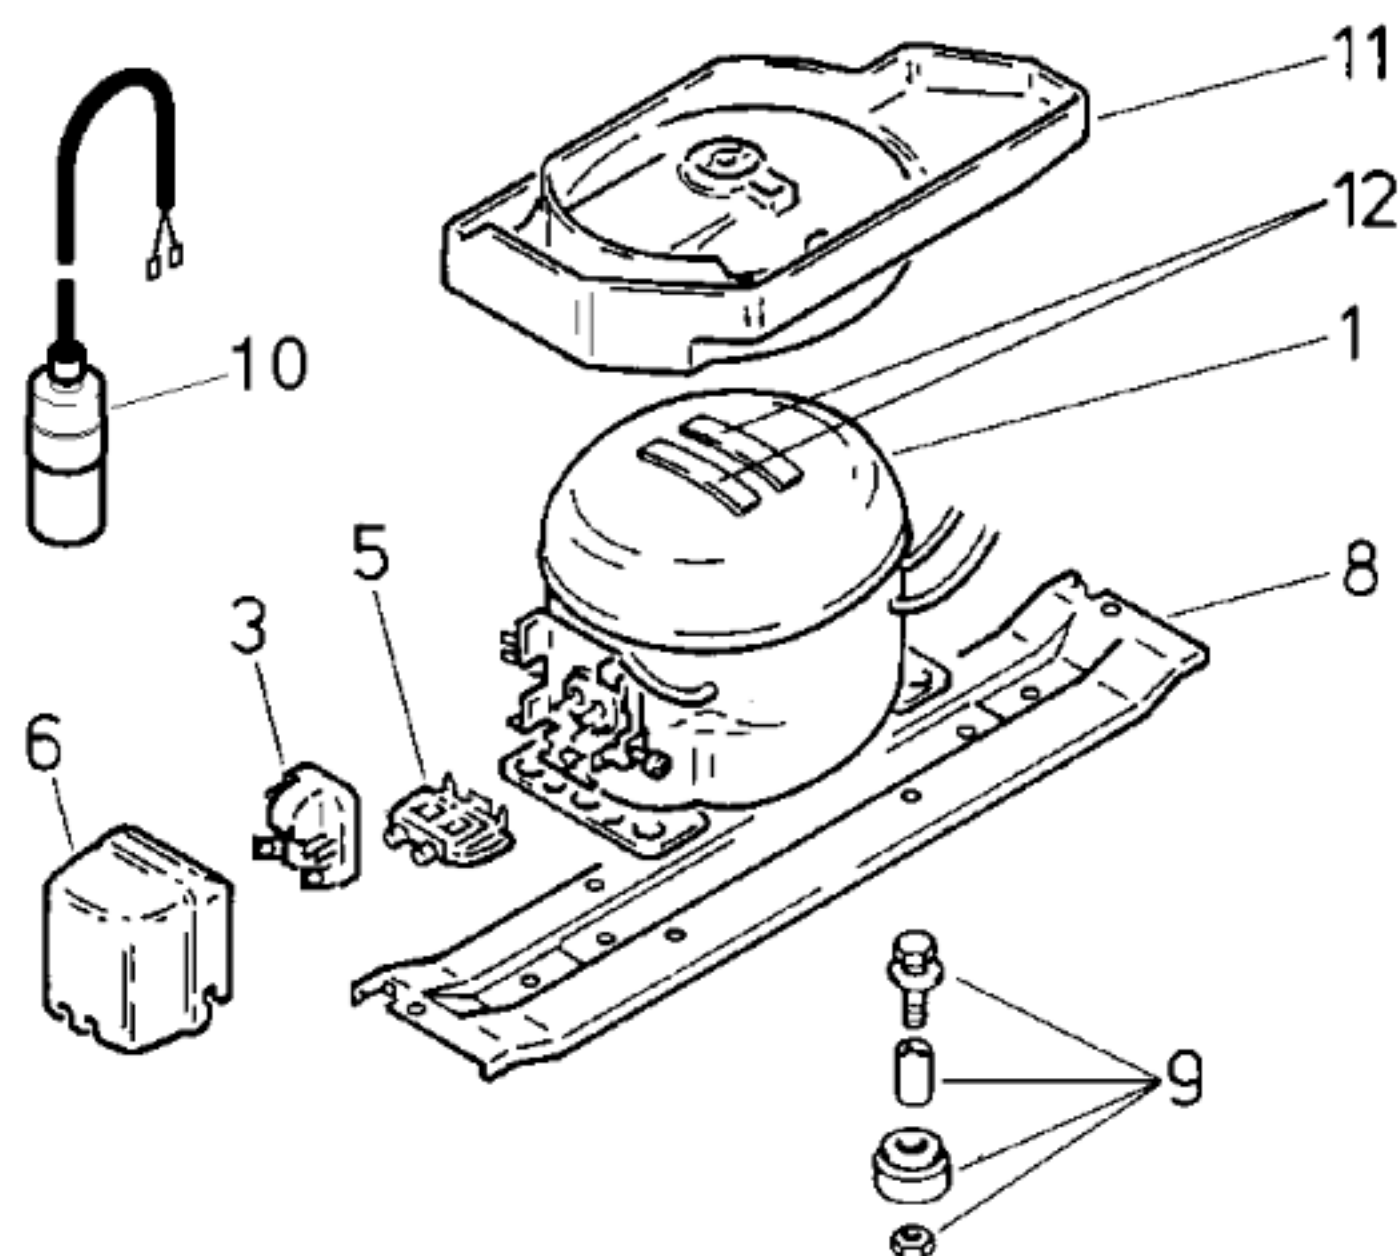

|      | V01       | V02      |  |
|------|-----------|----------|--|
| Pos. | Goldstar  | Goldstar |  |
|      | NDA69NAEM | TLY6KK2  |  |
| 1    | 14 3810   | 142058   |  |
| 2    |           |          |  |
| 3    | 17 0743   | 151055   |  |
| 4    |           |          |  |
| 5    | 17 0745   | 150760   |  |
| 6    | 17 0744   | 151072   |  |
| 7    | 16 9319   | 16 9319  |  |
| 8    | 26 4879   | 26 4879  |  |
| 9    | 0 50166   | 0 50166  |  |
| 10   |           |          |  |
| 11   | 36 5099   | 36 5099  |  |
| 12   | 05 6008   | 05 6008  |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES |           |         |    |
|--------------------------------------------------------|-----------|---------|----|
| Verdichter/Compressor/Compresseur                      | Goldstar  | Danfoss |    |
| Typ/Type                                               | NDA69NAEM | TLY6KK2 |    |
| Förderleistung/Delivery/Débit                          | 1242      | 1026    |    |
| Anlaufstrom/Starting current/Cour de démarrage         | A         | 4,4     |    |
| Widerstand/Resistance/Résistance                       | Ω         | 34,0    |    |
| Hi/aux                                                 | Ω         | 41,0    |    |
| Temp.–Regler/Thermostat                                | Ranco     |         |    |
| Typ/Type                                               | K59       |         |    |
| Regelstellung/Position                                 | kalt      | warm    |    |
| Schaltwerte/Switching values                           | "warm"    | +4,0    |    |
| Valeurs de commutation                                 | "kalt"    | +4,0    |    |
|                                                        | "alarm"   | -32,0   |    |
| Füllmenge/Fill.quantity/Charge                         | R600a     | *       |    |
| Anschlußwert/Conn.load/Puiss. connectée                | W         | 68      | 63 |
| Heizung/Heater/Chauffage                               |           |         |    |
| Widerstand/Resistance/Résistance                       | Ω         |         |    |
| Leistung/Power/Puissance                               | W         |         |    |
| Ventilator/Blower/Ventilateur                          |           |         |    |
| Widerstand/Resistance/Résistance                       | Ω         |         |    |
| Temp.–Regler/Thermostat                                |           |         |    |
| Magnetventil/Magnetic valve/Electrovanne               |           |         |    |
| Widerstand/Resistance/Résistance                       | Ω         |         |    |
| Spannung/Voltage/Tension                               | V         |         |    |

\* siehe Typenschild