


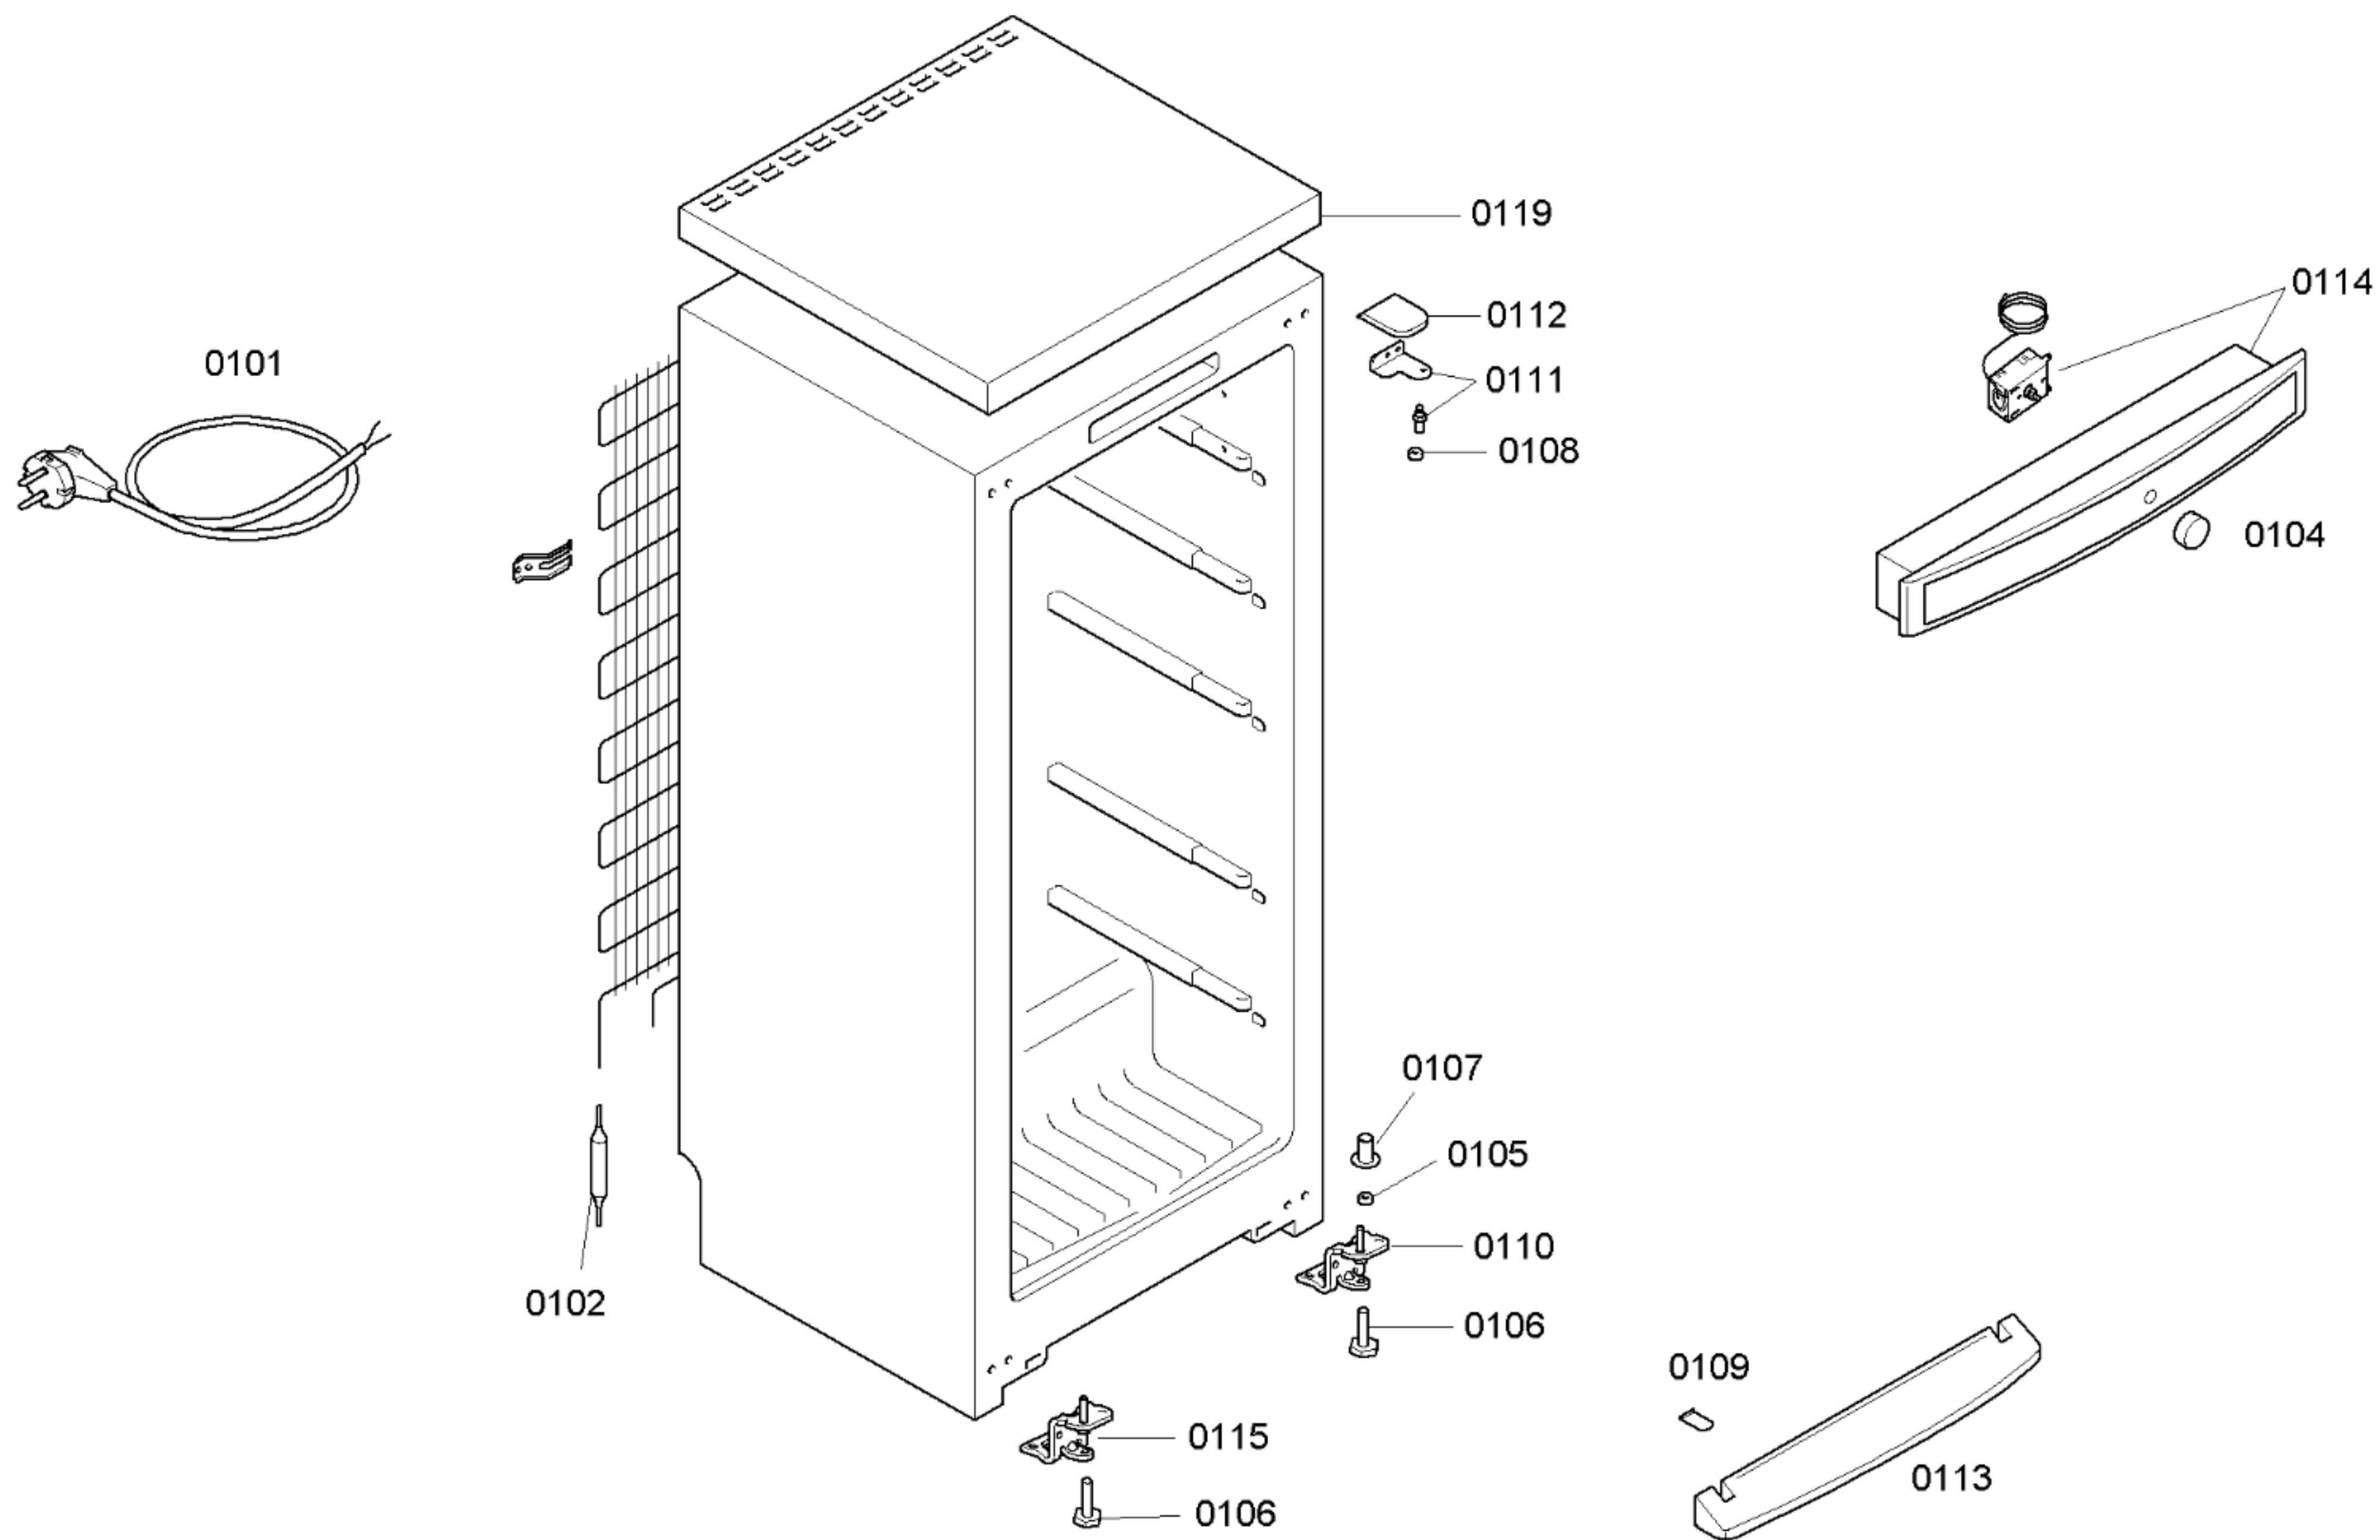


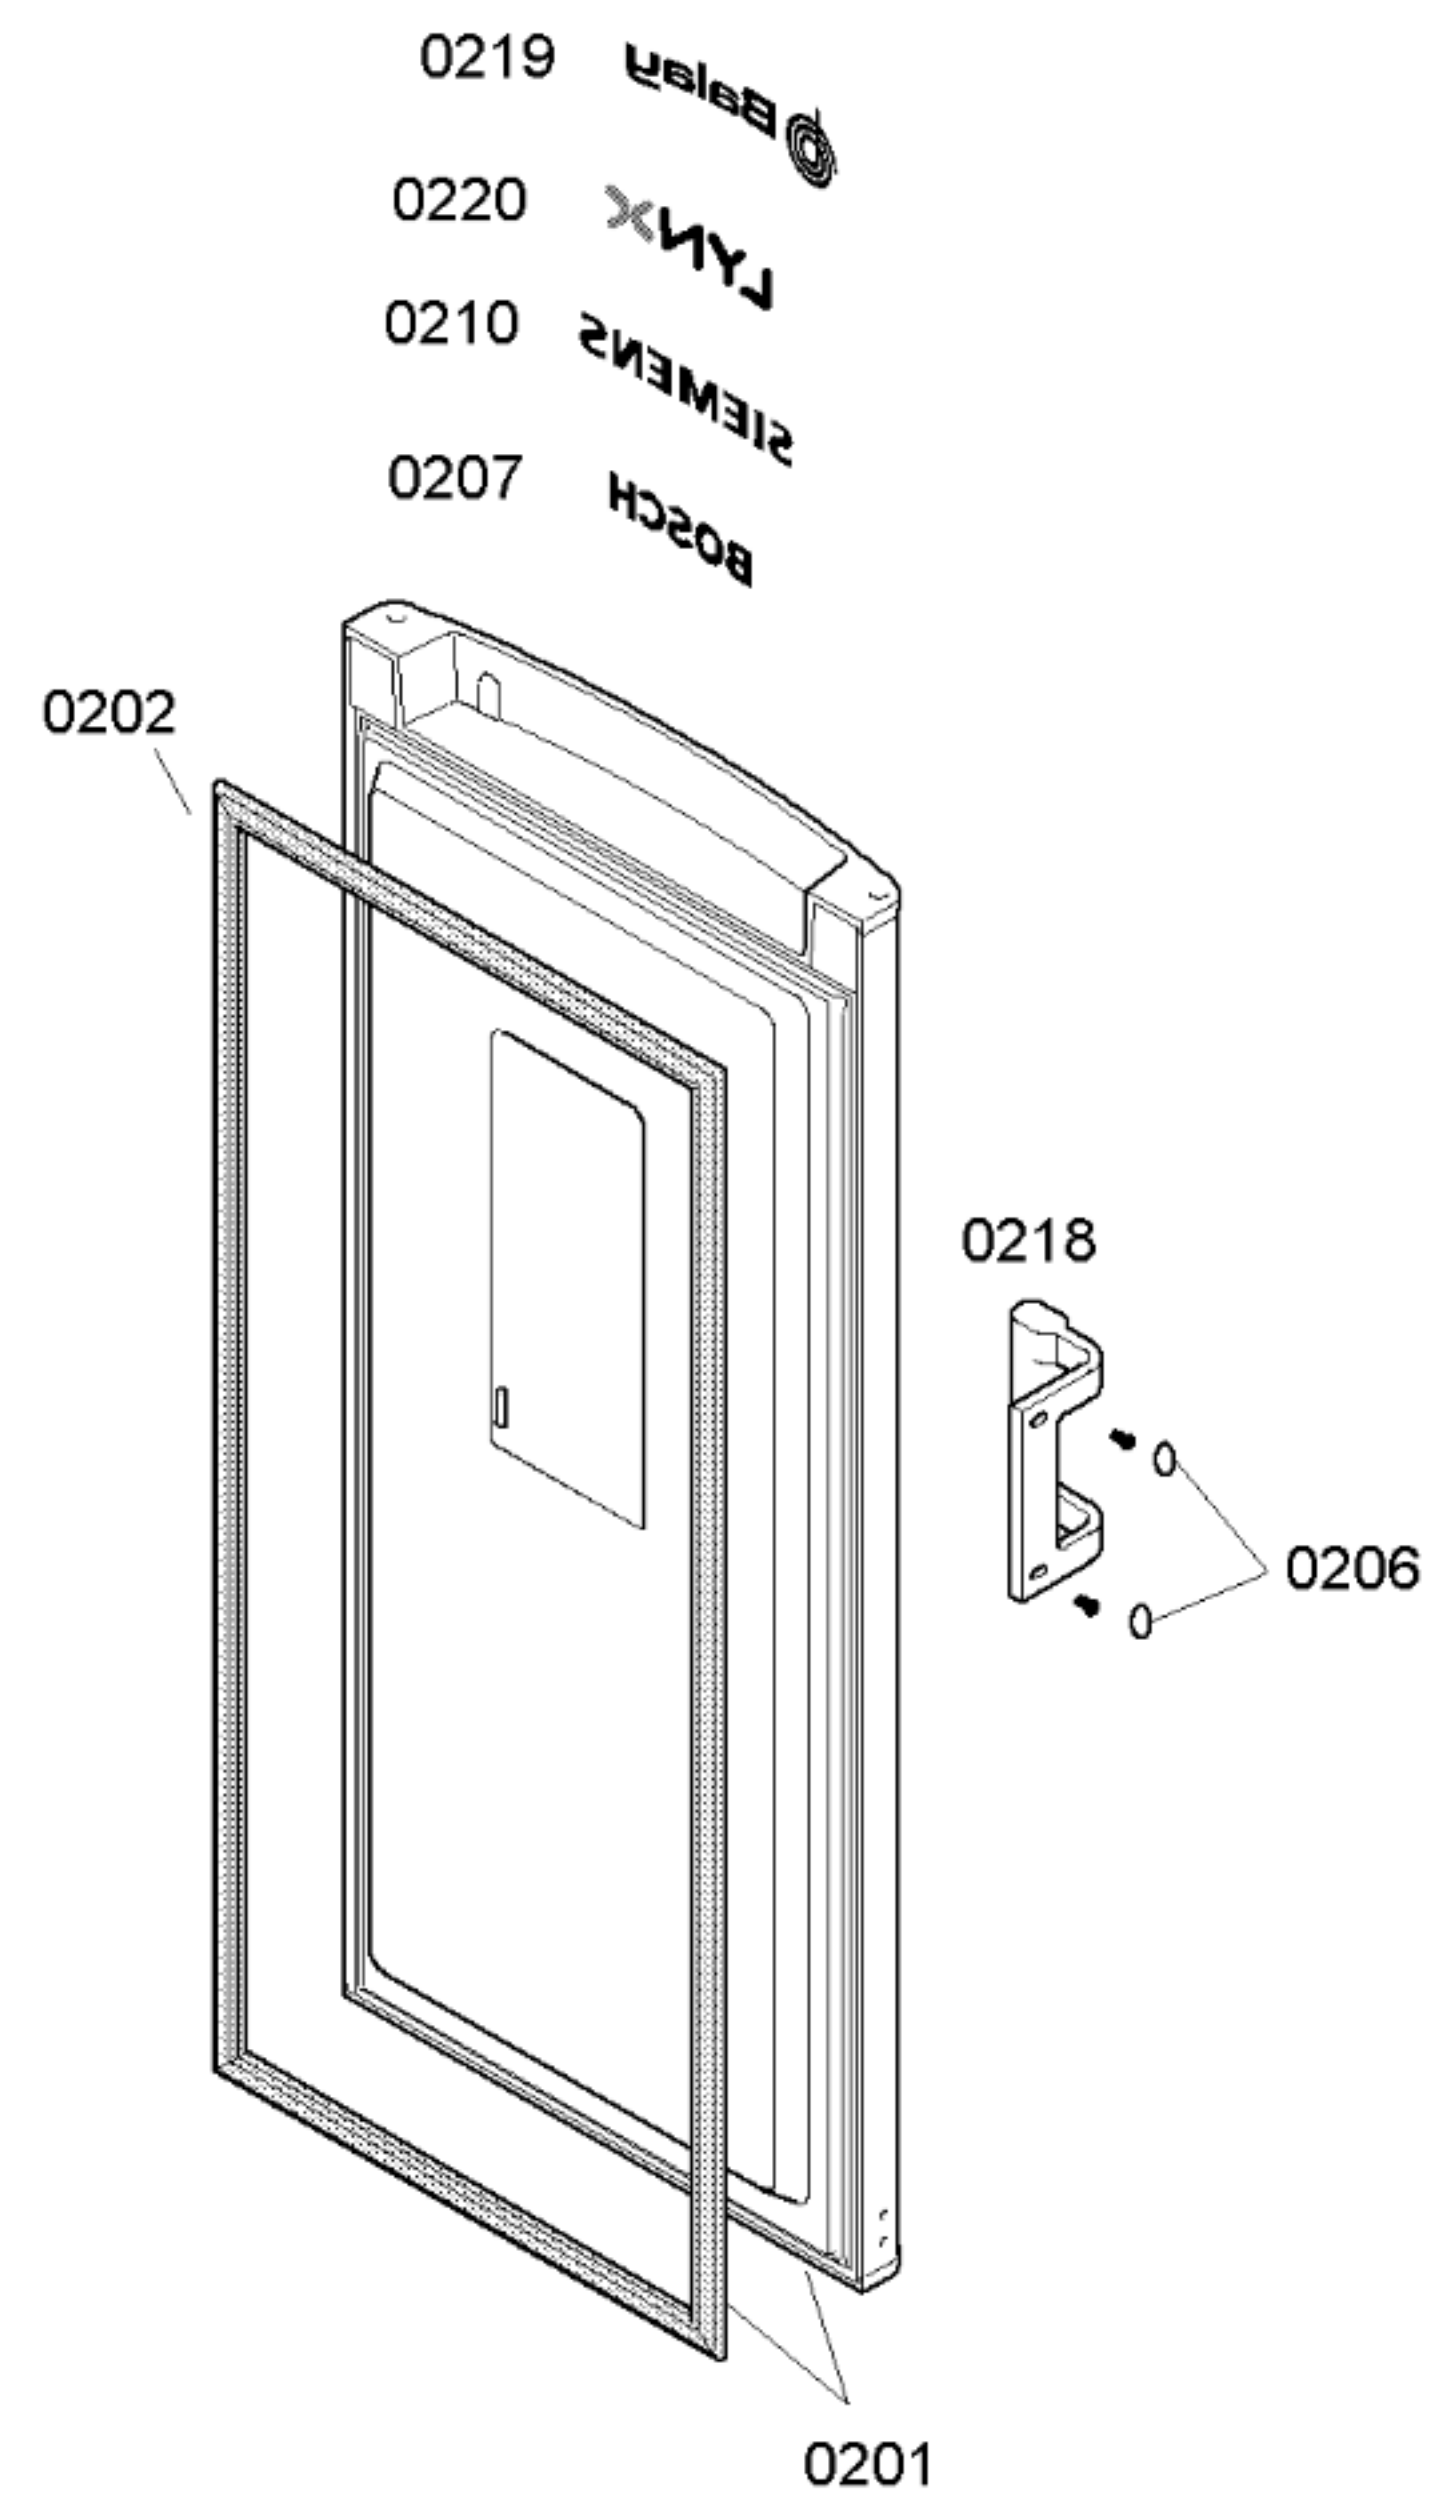

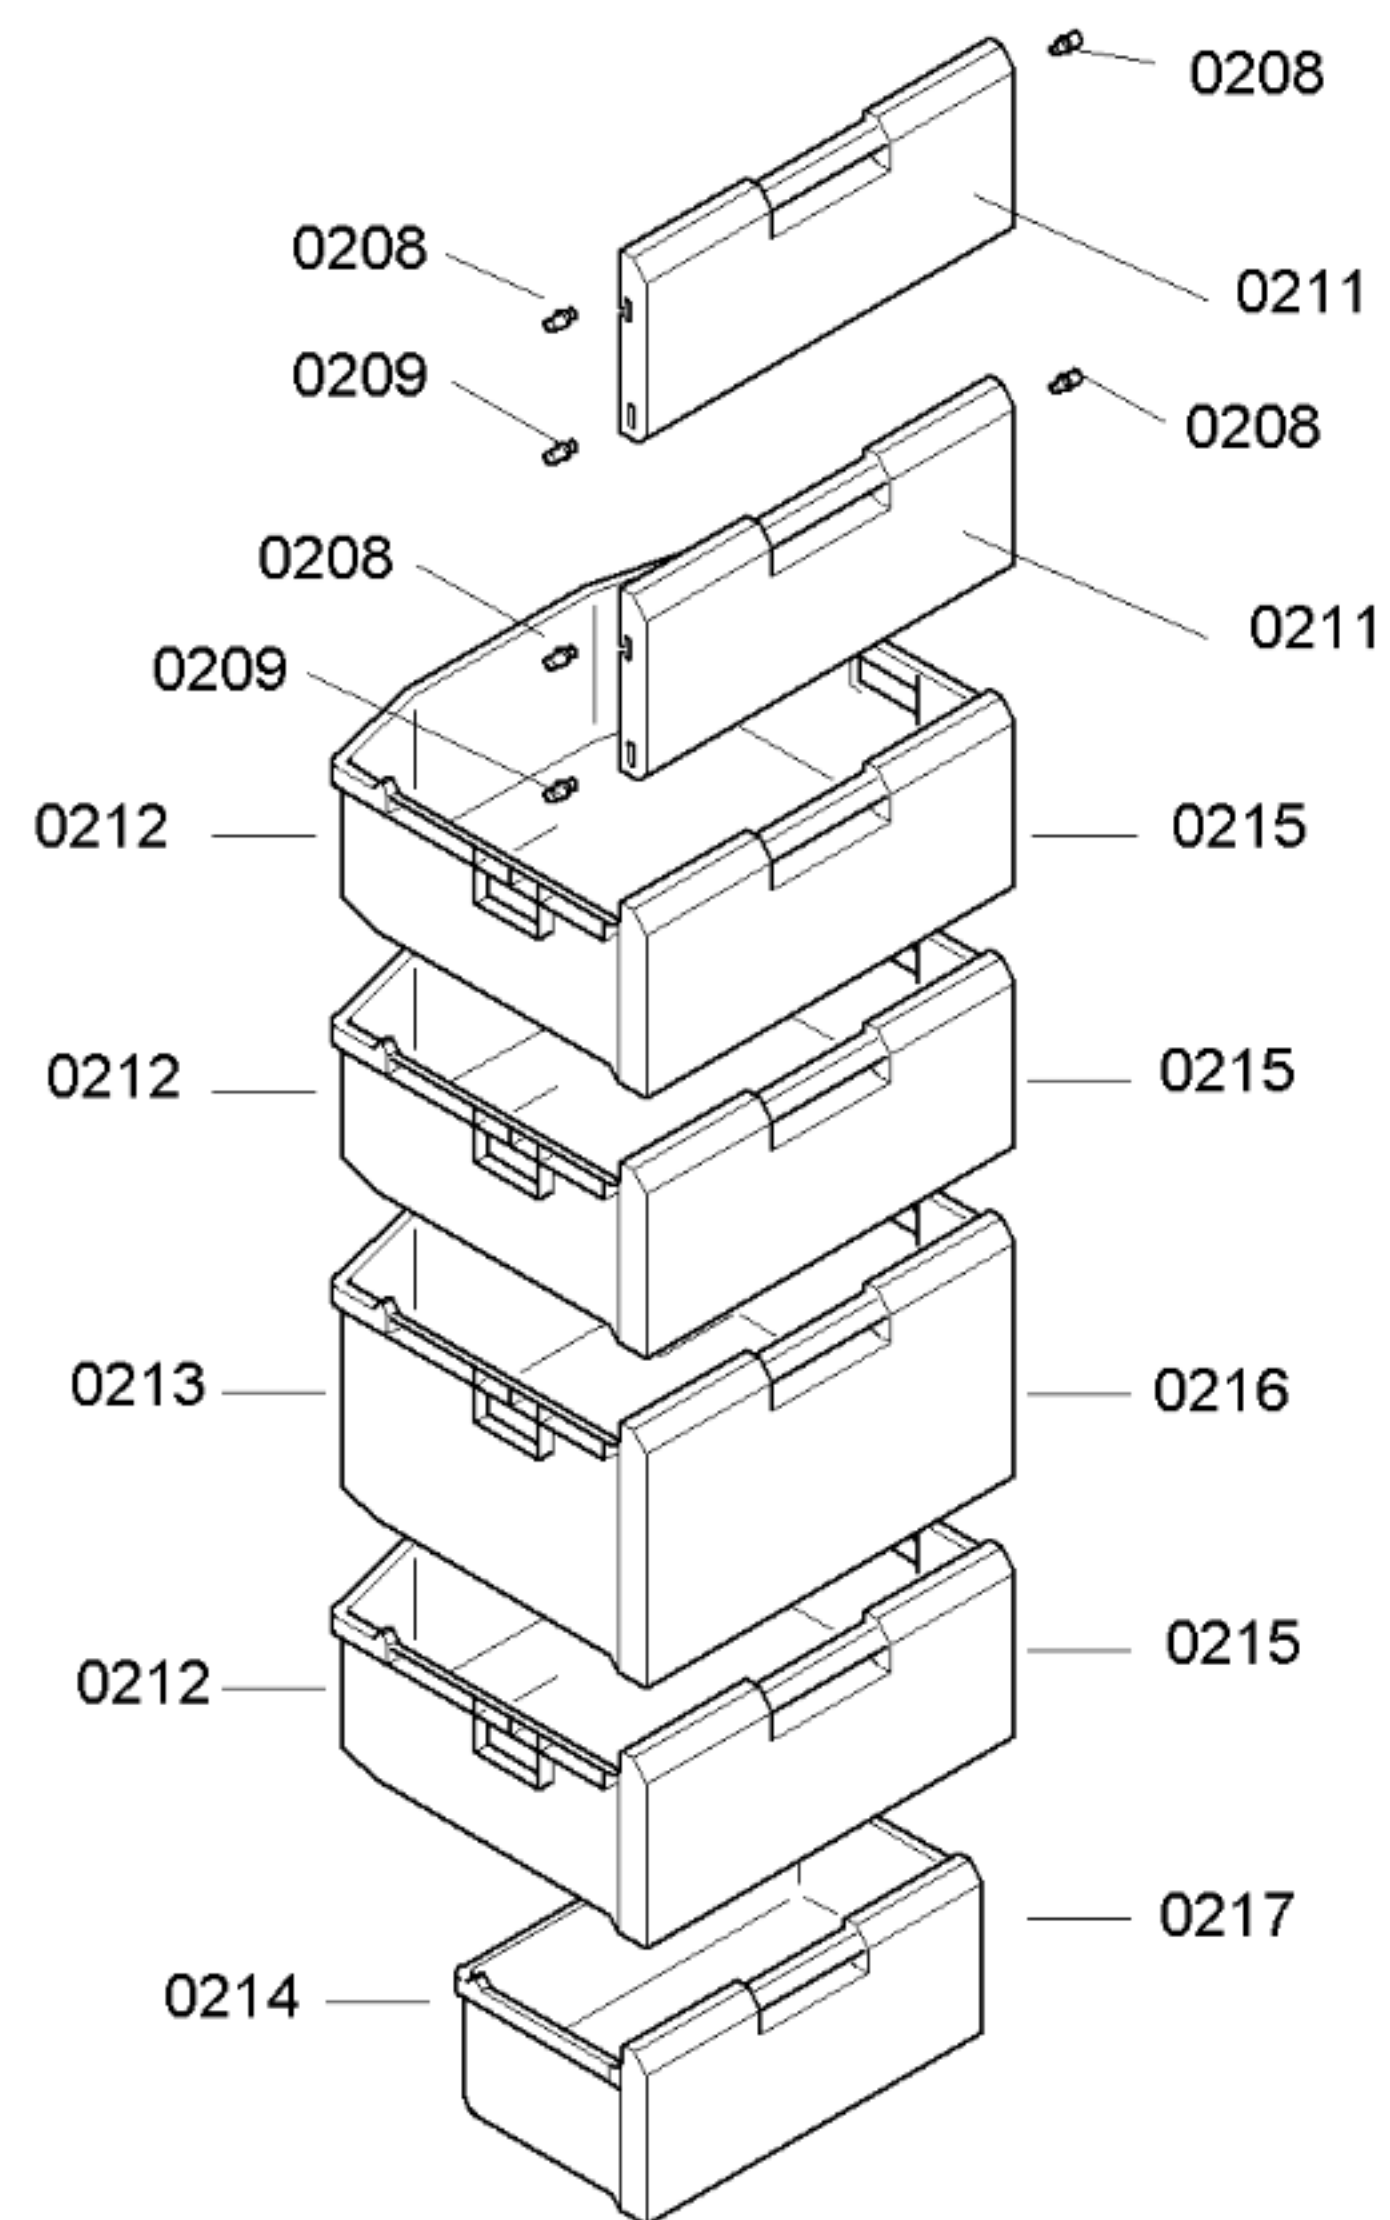

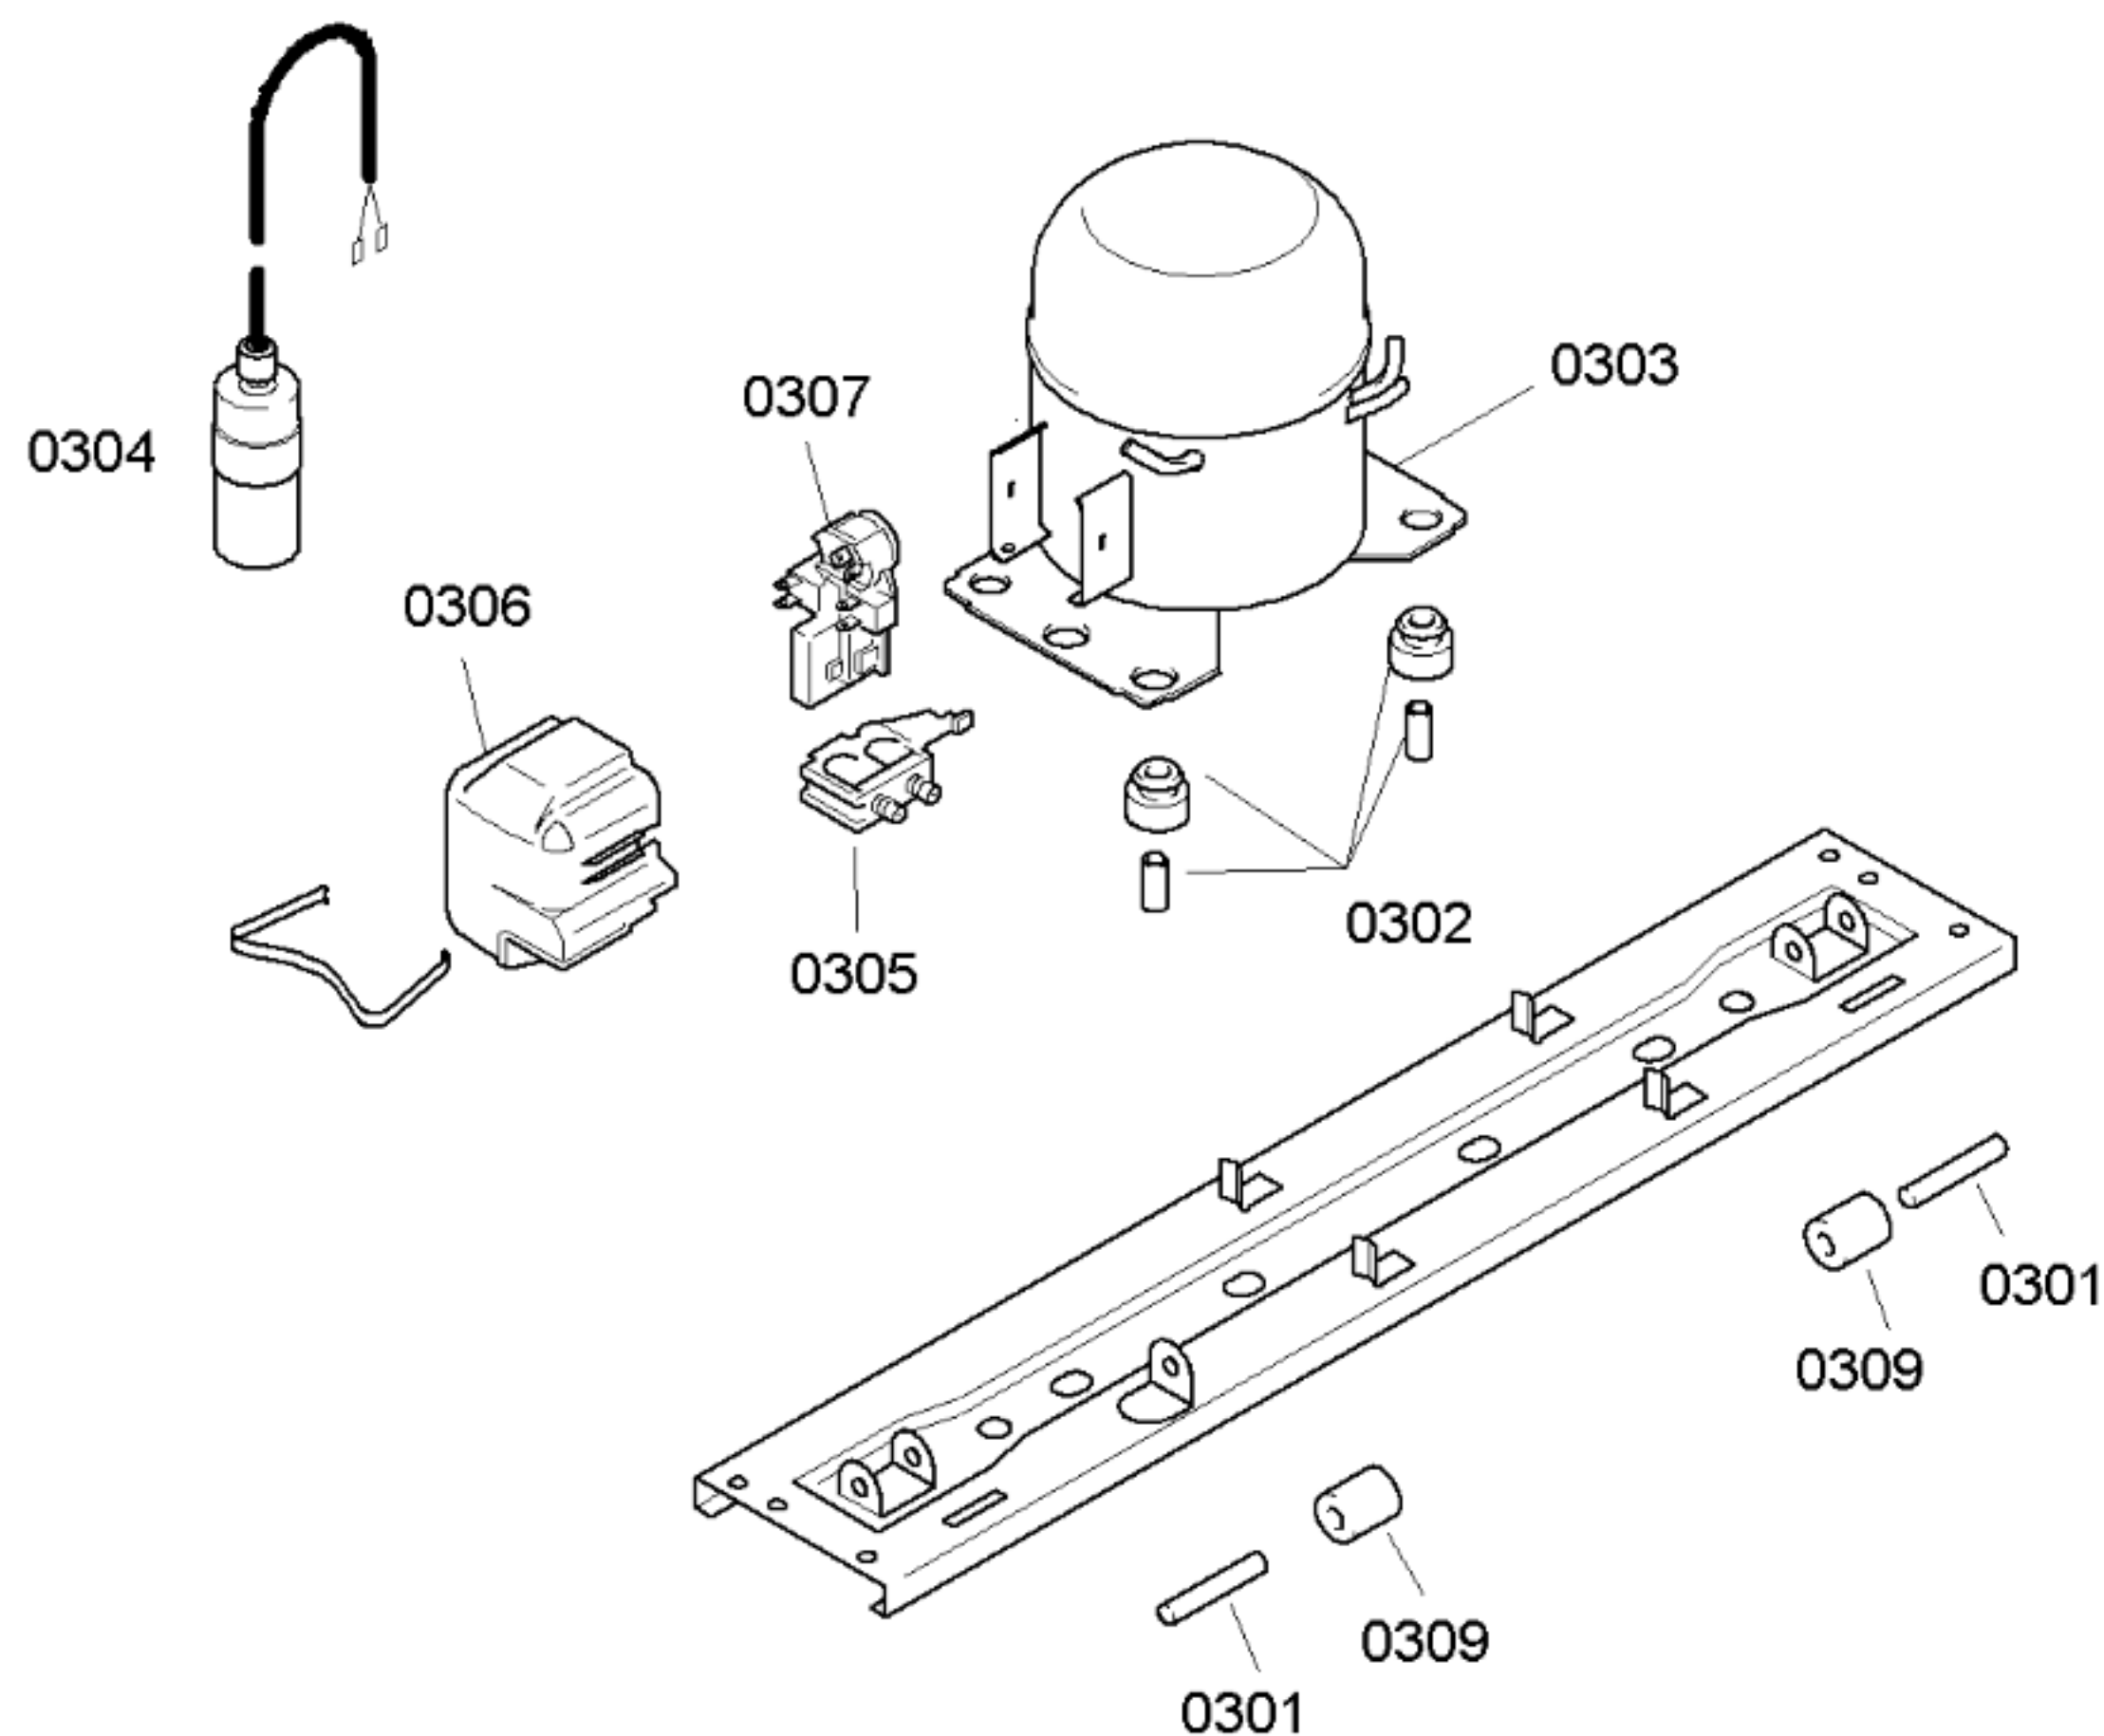

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES					
Verdichter/Compressor/Compresseur		Matsushita			
Typ/Type		DC 110 E			
Förderleistung/Delivery/Débit		l/h	0354		
Anlaufstrom/Starting current/Cour de démarrage		A	8,2		
Widerstand/Resistance/Résistance		Ω	12		
		Hi/aux	30,9		
Temp.-Regler/Thermostat					
Typ/Type					
Regelstellung/Position					
Schaltwerte/Switching values		"warm"			
Valeurs de commutation		"kalt"			
		"alarm"			
Füllmenge/Fill.quantity/Charge		R600a	*		
Anschlußwert/Conn.load/Puiss. connectée		W	116		
Heizung/Heater/Chauffage					
Widerstand /Resistance/Résistance		Ω			
Leistung/Power/Puissance		W			
Ventilator/Blower/Ventilateur					
Widerstand /Resistance/Résistance		Ω			
NTC-Fühler / Sensor		°C	k Ω	°C	k Ω
		+10	9,95 ± 0,18	-18	43,31 ± 1,10
		+5	12,70 ± 0,18	-22	54,66 ± 1,59
		0	16,33 ± 0,16	-26	69,42 ± 2,29
Magnetventil/Magnetic valve/Electrovanne					
Widerstand/Resistance/Résistance		Ω			
Spannung/Voltage/Tension		V			