


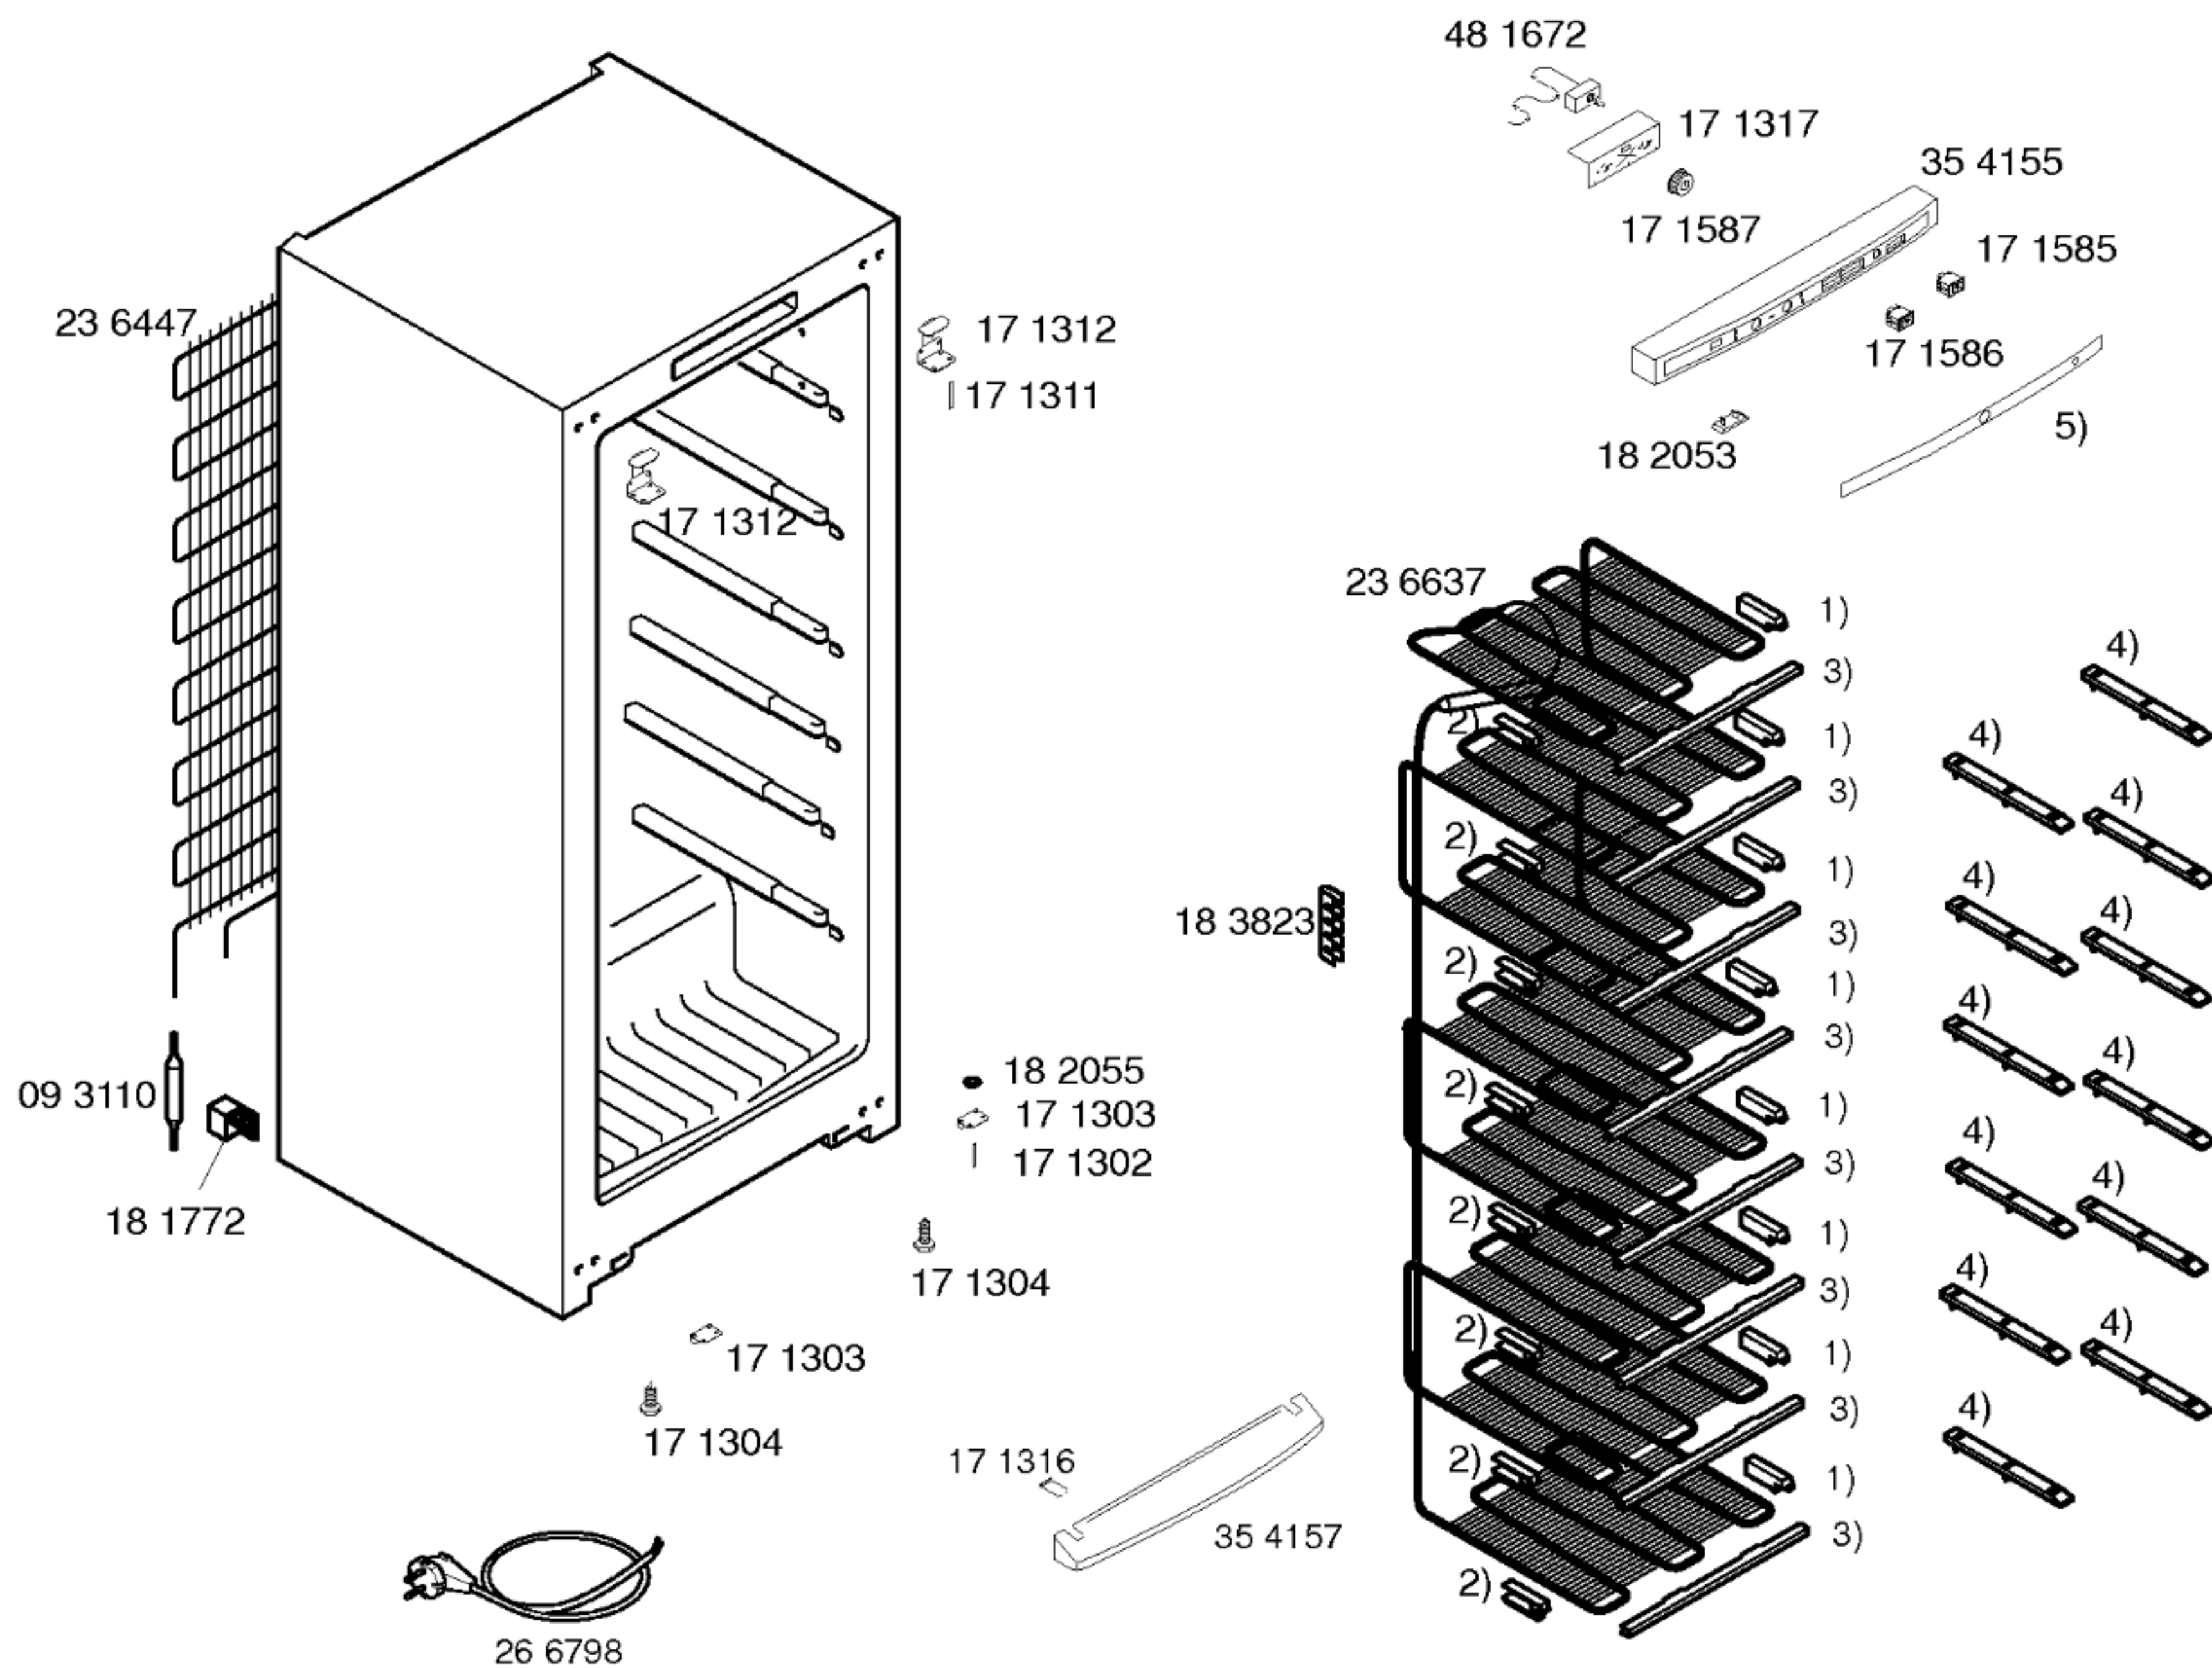

Gebrauchsanweisung
58 0665

V01,V02

58 4311

V03

(DE,EN,FR,IT,ES,PT,
DA,SV,LO,FI)

Side by Side
Beistellsatz zu KSR
23 6591

1) 18 3821

2) 18 3822

3) 36 2472




4) 36 7363

5) 36 2525

V01,V02

43 2144

V03

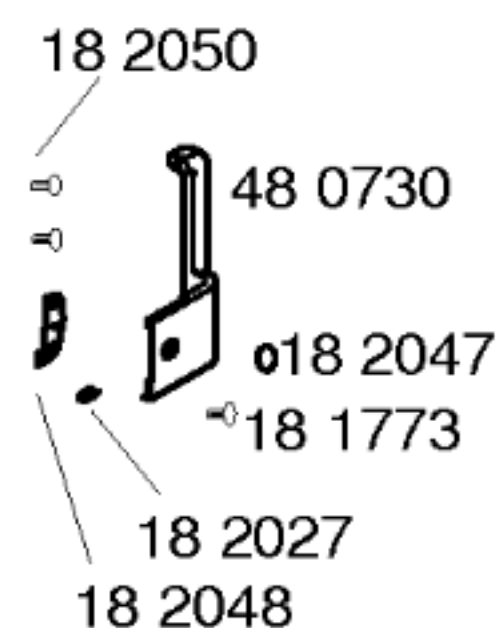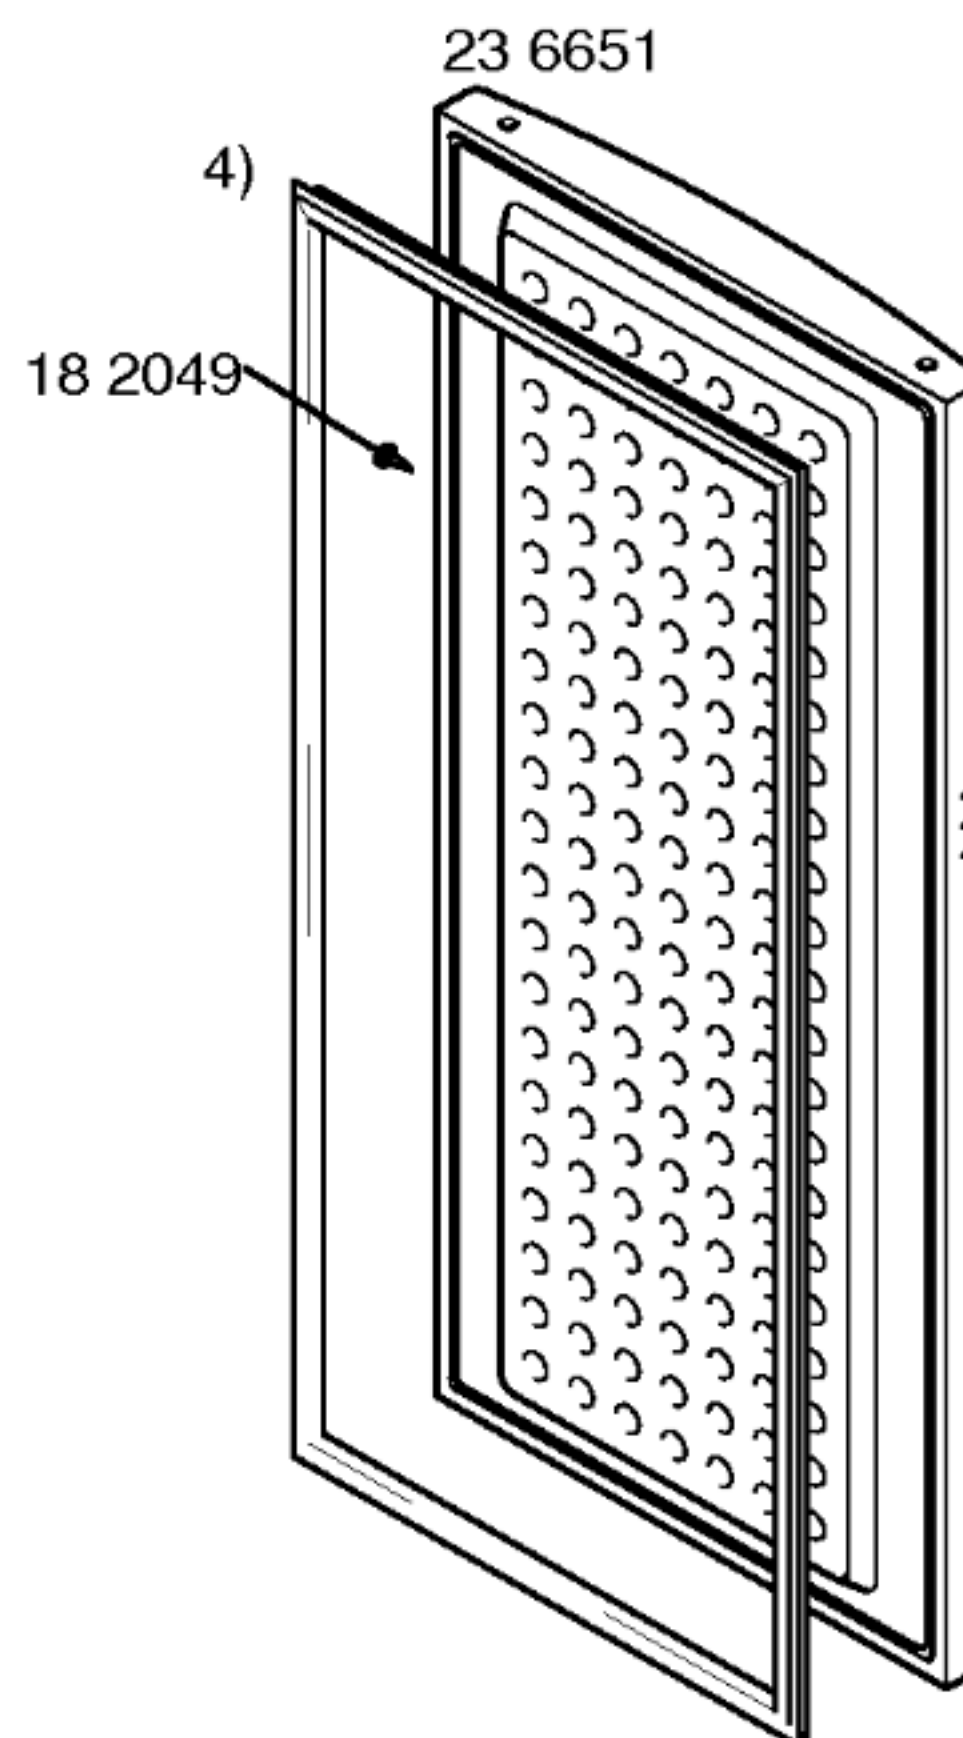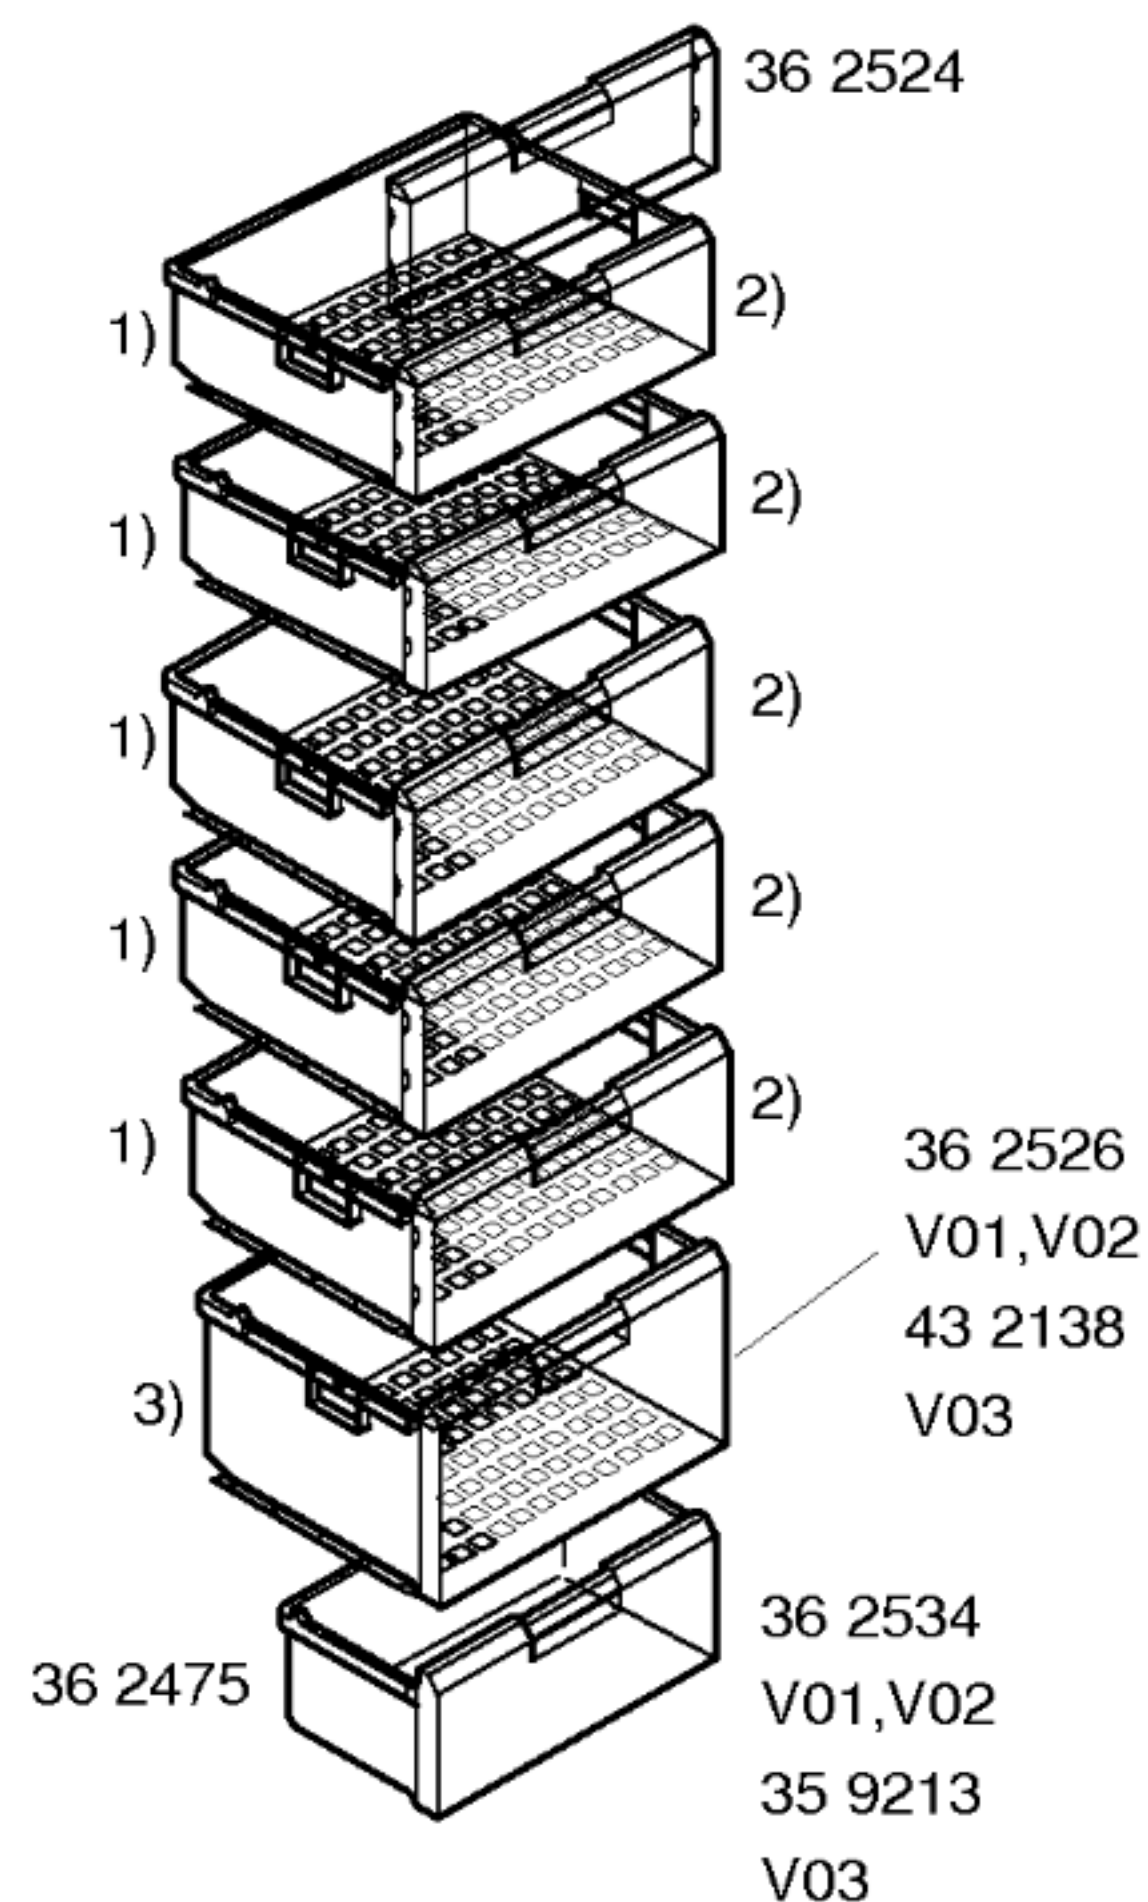

1) 36 2473

V01

43 1043

V02,V03

2) 36 2533

V01,V02

35 9213

V03

3) 36 2474

V01

43 1044


V02,V03

4) 23 6408

V01

23 8414

V02,V03

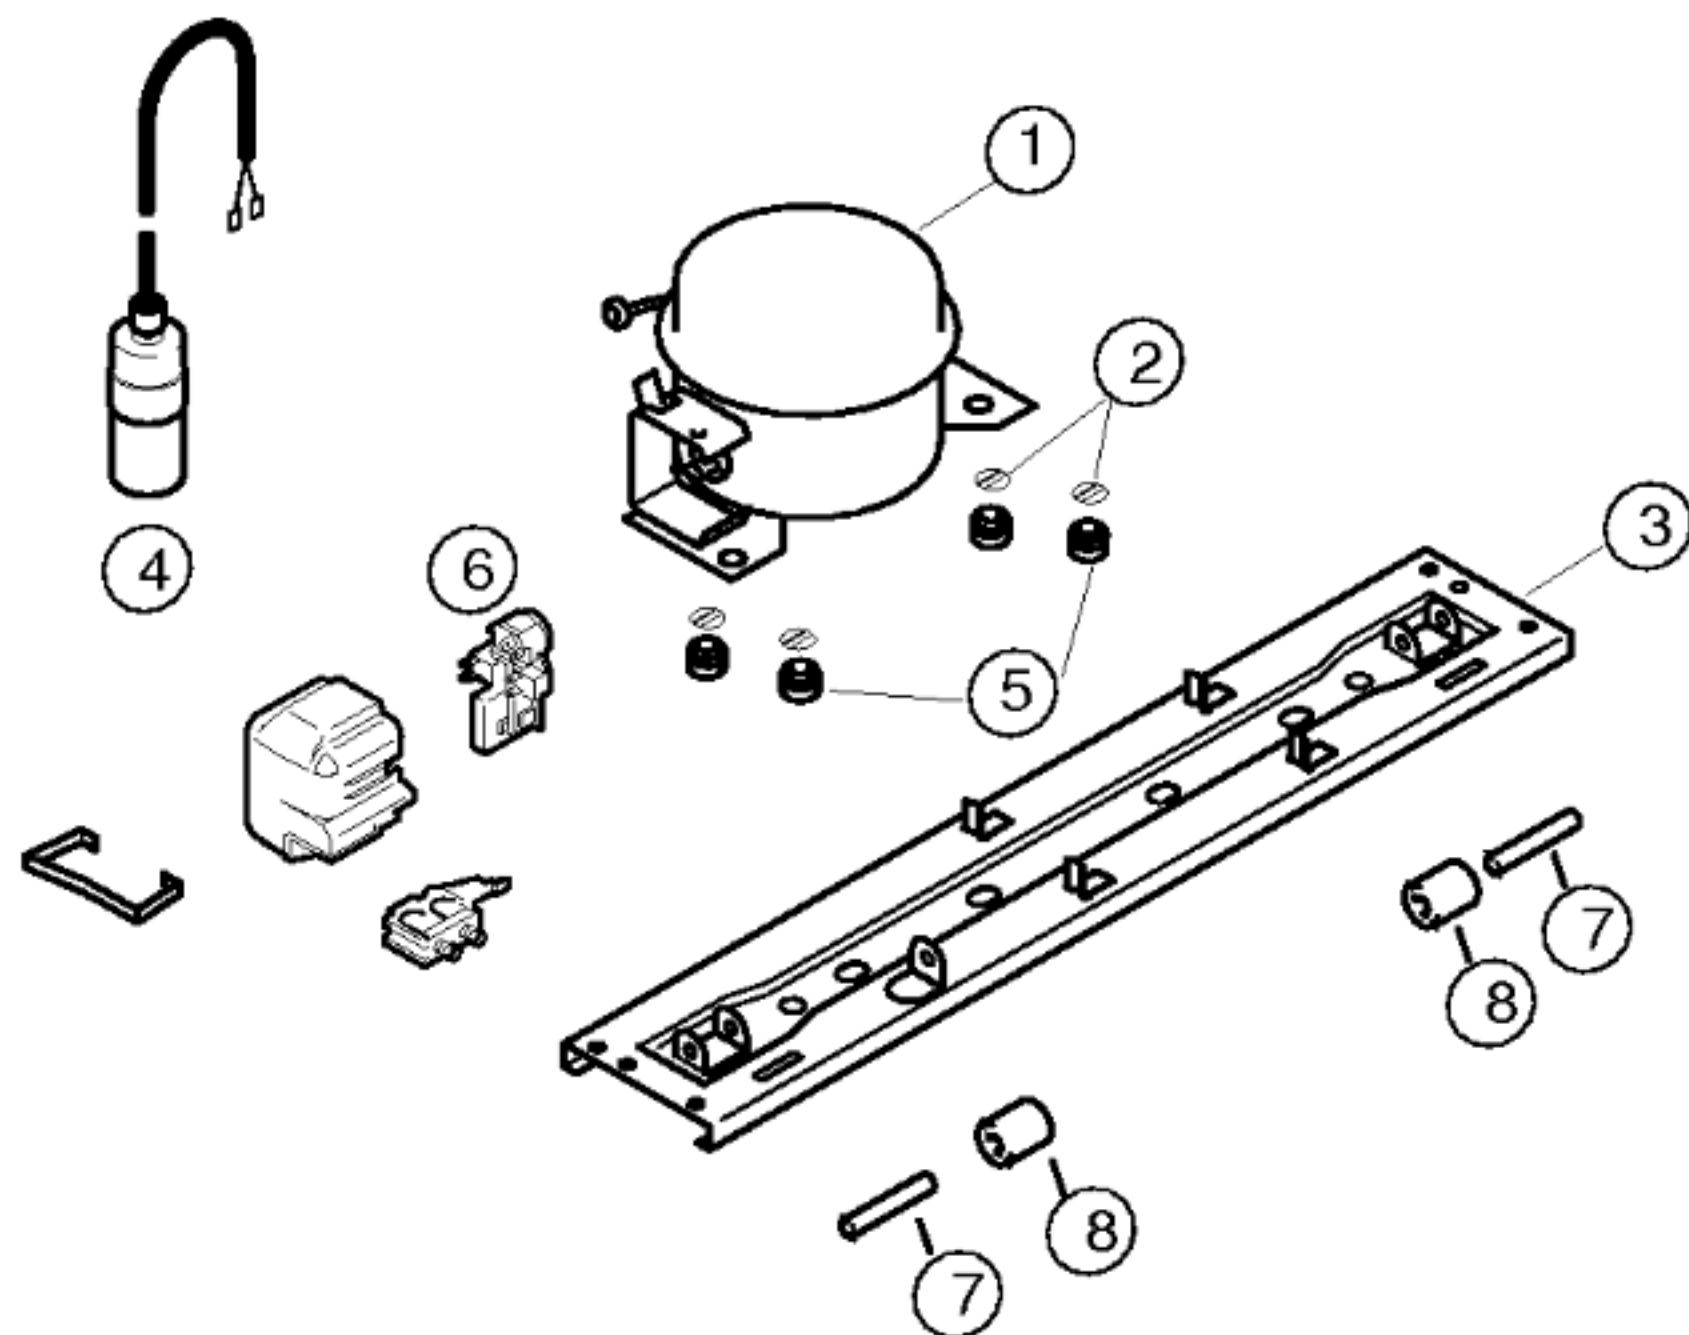

Pos.	Matsushita		
	DC125E12		
1	14 2169		
2	17 1519		
3	35 4158		
4	17 4093		
5	16 3427		
6	18 3872		
7	18 1014		
8	17 1318		
9			
10			
11			
12			

TECHNISCHE DATEN/TECHNICAL DATA/TEKNIK BİLGİLER			
Verdichter/Compressor/Kompresör	Matsushita		
Typ/Type/Tip	DC125E12		
Förderleistung/Delivery/Verim/h	2074		
Anlaufstrom/Starting current/Giris akimi	A	10,9	
Widerstand/Resistance/Rezistans Ha/	Ω	12,7	
Hi/aux.		18,0	
Temp.Reyler/Thermostat/Termostat			
Typ/Type/Tip			
Reglerstellung/Position/Termostat pozisyonu	..ein/acma °C		
Schaltwerte/Acma kapama degerleri	..aus"/kapama		
Valeurs de commutation/Termostat degeri	..alarm'		
(..abtaven' od)			
Füllmenge/Fill. quantily/ Dolum miktarı	R600	g	*
Anschlusswert/Comm. load/Giris gucu	W		
Heizung/Heater/Rezistans	Ω		
Widerstand/Resistance/Direnc	W		
Leistung/Power/Guc			
Ventilador/Blower/Vantilatör	Ω		
Widerstand/Resistance/Rezistans			
Magnetventil/Magnetic valve/Manyetik valf	Ω		
Widerstand/Resistance/Rezistans	V		
Spannung/Voltage/Gerilim			
Temp.Reyler/Thermostat/Termostat			

* Siehe Typenschild/Mamul etiketine bakınız